



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE5646 TRIAC – Internally Triggered

Description:

The NTE5646 is a TRIAC that includes a diac trigger mounted inside the same package. This device saves the user the added expense of buying a discrete diac and the assembling associated with a gated triac. This device includes a dial trigger mounted inside the same isolated TO220 type package.

Absolute Maximum Ratings:



Repetitive Peak Off–State Voltage (Gate Open, $T_J = +110^{\circ}\text{C}$, Note 1), V_{DRM} 600V
 RMS On–State Current ($T_C = +80^{\circ}\text{C}$, Conduction Angle of 360°), $I_{\text{T(RMS)}}$ 10A
 Peak Surge (Non–Repetitive) On–State Current (One Cycle, at 50Hz or 60Hz), I_{TSM} 100A
 Peak Gate–Trigger Current (3sec Max), I_{GTM} 1.5A
 Operating Junction Temperature Range, T_{opr} -40° to $+110^{\circ}\text{C}$
 Storage Temperature Range, T_{stg} -40° to $+150^{\circ}\text{C}$
 Typical Thermal Resistance, Junction to Case, $R_{\theta\text{JC}}$ 2.8°C/W

Note 1. All values apply in either direction.

Electrical Characteristics: ($T_C = +25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Peak Off–State Current	I_{DRM}	Gate Open, $T_V = +110^{\circ}\text{C}$, $V_{\text{DRM}} = 600\text{V}$, Note 1	–	0.5	–	mA
Maximum On–State Voltage	V_{TM}	$I_T = 10\text{A}$, Note 1	–	–	1.5	V
DC Holding Current	I_{HOLD}	Gate Open, Note 1	–	–	60	mA
Critical Rate–of–Rise of Off–State Voltage	Critical dv/dt	$V_D = 600\text{V}$, Gate Open, $T_C = +110\text{C}$, Note 1	–	60	–	V/ μs
Critical Rate–of–Rise of Commutation Voltage	Commutating dv/dt	$T_C = +80^{\circ}\text{C}$, Gate Unenergized, $V_D = 600\text{V}$, $I_T = 10\text{A}$, Note 1	–	4	–	V/ μs
Gate–Controlled Turn–On Time	T_{gt}	$V_D = 600\text{V}$, $t_R = 0.1\mu\text{s}$, $I_T = 10\text{A}$ (Peak)	–	3	–	μs
Trigger DIAC Specifications						
Breakover Voltage Symmetry	$\Delta V_{(\text{BO})}$		–	3	–	V
Breakover Voltage (Forward & Reverse)	V_{BO}		30	–	45	V
Dynamic Breakback Voltage (Forward & Reverse)	$[\Delta V \pm]$		–	5	–	V
Peak Breakover Current	I_{BO}		–	200	–	μA
Trigger Firing Capacitance	C		–	0.1	–	μF

Note 1. All values apply in either direction.

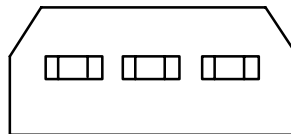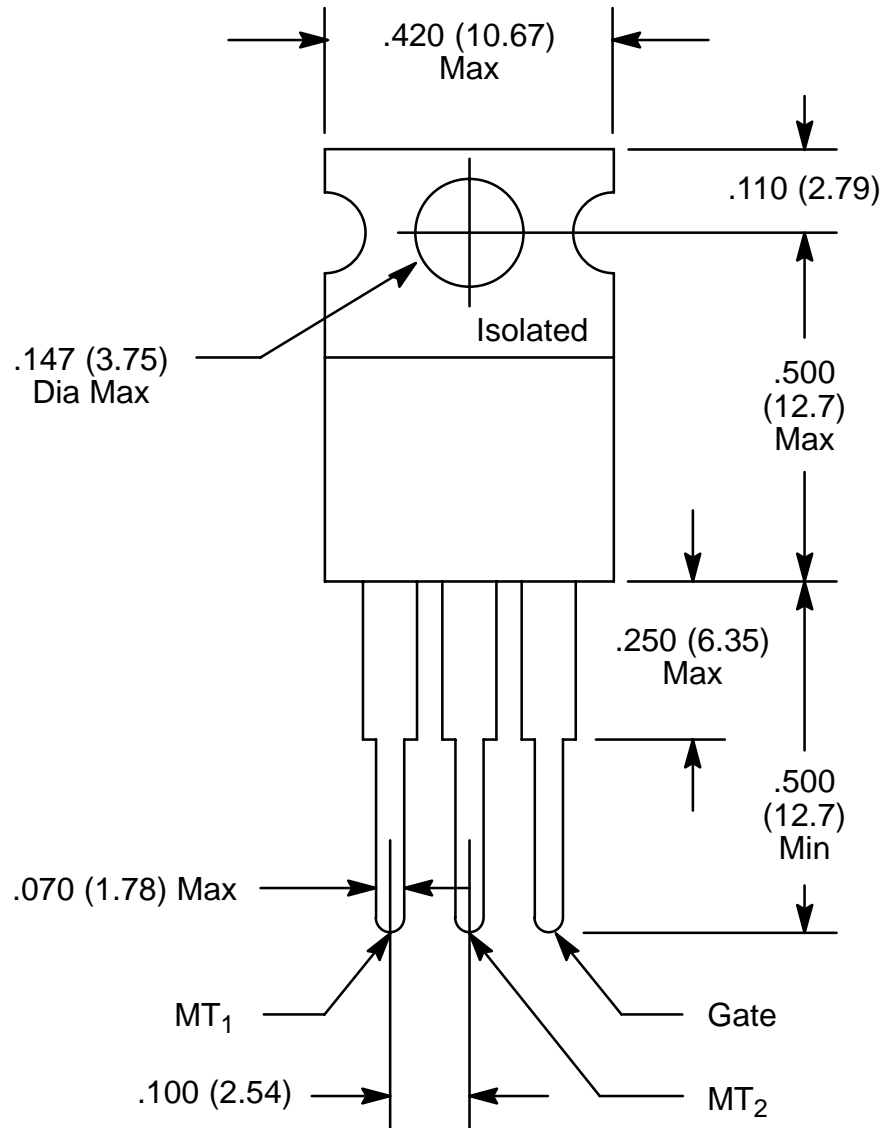

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triacs](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[ACST435-8B](#) [LIC01-215B-TR](#) [T2035H-6G](#) [BT137-600-0Q](#) [Z0410NF 1AA2](#) [098128C](#) [620675E](#) [T1610-600G-TR](#) [Z0409MF0AA2](#)
[Z0109NA 2AL2](#) [ACS108-8SA-AP](#) [ACS108-8SN-TR](#) [ACST1635T-8FP](#) [BCR16PM-12LG#B00](#) [BCR20RM-30LA#B00](#) [T1205-600G-TR](#)
[CMA60MT1600NHR](#) [NTE5611](#) [NTE5612](#) [NTE5613](#) [NTE5621](#) [NTE5623](#) [NTE5629](#) [NTE5638-08](#) [NTE5688](#) [NTE5689](#) [NTE5690](#) [T1235T-](#)
[8I](#) [BTA312-600CT.127](#) [T1210T-8G-TR](#) [T1210T-8G](#) [BT136S-600E,118](#) [RS40Z06-BW](#) [BT137B-800G,118](#) [Z0109NN0,135](#) [BTA212-](#)
[600D,127](#) [BTA24-600CW](#) [BTA16](#) [BTA20](#) [BT137](#) [BTA04-600CW](#) [BTA04-800CW](#) [BTA20-800CW](#) [MAC4DLM-1G](#) [BT137-600E,127](#)
[BT137X-600D](#) [BT148W-600R,115](#) [BT258-500R,127](#) [BTA08-800BW3G](#) [BTA140-800,127](#)