

FM Super-het Receiver 434.15

Low cost & high sensitivity

RX-FM4SF 434.15

Part Number: 650201108G

DESCRIZIONE

Ricevitore supereterodina FM ad elevata sensibilità e selettività, munito di filtro SAW front-end che lo rende altamente immune ai disturbi. Grazie al pin di enable il ricevitore può assumere lo stato di power-down in assenza di segnale e minimizzare così il consumo a 0,5 µA. Ideale per codifica KeeLoq di Microchip.


Da usare con trasmettitore dual band TX-FM 434/868 (P.N. 650201089G).

DESCRIPTION

High sensitivity and sensibility super-het receiver FM receiver. Front-end SAW filtered to an higher electromagnetic immunity. Enable pin allows to reach power-down mode without signal and reduce consumption up to 0.5 µA. Ideal for Microchip KeeLoq encoders.

To be used with dual band transmitter mod. TX-FM 434/868 (P.N. 650201089G).

BLOCK DIAGRAM

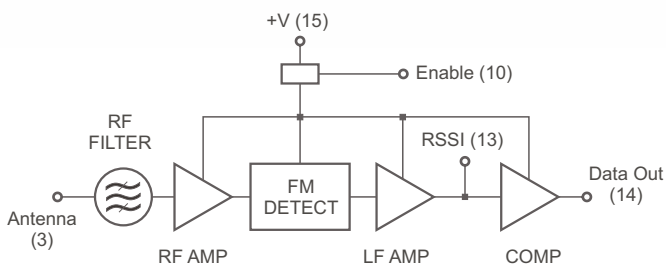

TECHNICAL SPECIFICATION


Ta = 25 °C

CHARACTERISTICS	CARATTERISTICHE
Supply Voltage	Alimentazione
Supply Current	Corrente Assorbita
Power-down	Power-down
Reception frequency	Frequenza di ricezione
RF sensitivity ⁽¹⁾	Sensibilità RF ⁽¹⁾
RF Bandwidth - 3dB	Banda passante RF a - 3dB
IF Bandwidth - 3dB	Banda passante IF a - 3dB
Square wave output	Onda quadra in uscita
Output high voltage	Livello alto d'uscita
Output low voltage	Livello basso d'uscita
Antenna RF emission	Emissioni RF spurie in antenna
Switch-on time ⁽²⁾	Tempo di accensione ⁽²⁾
Operating temperature range	Temperatura di lavoro


⁽¹⁾ RF generator with 100% modulation

⁽²⁾ Time needed to achieve declared features leaving power-down mode.

DIMENSIONS

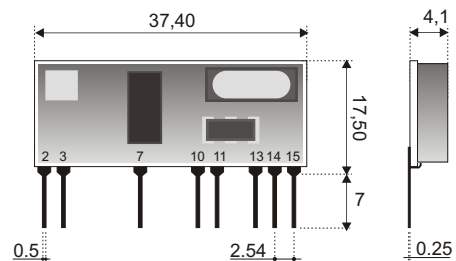

COMPONENT SIDE



PIN-OUT

- 2) Ground
- 3) Antenna
- 7) Ground
- 10) Enable
- 11) Ground
- 13) RSSI Out - Test point
- 14) Data Out
- 15) +V

APPLICATIONS

- ✓ Home security
- ✓ Access control
- ✓ Burglar alarms
- ✓ Car alarms

MIN	TYP	MAX	UNIT
4.5	5	5.5	Vdc
	5.6	6.0	mA
	0.5		µA
	434.15		MHz
	-105	-106	dBm
	600		KHz
	110		KHz
0.5	3.0	3.8	KHz
Vs - 1.2	Vs - 0.8		V
		0.1	V
		- 60	dBm
	1.5	2	mS
-20		+80	°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Modules](#) category:

Click to view products by [Aurel](#) manufacturer:

Other Similar products are found below :

[HMC-C009](#) [nRF24L01P-MODULE-PCB](#) [HMC-C001](#) [HMC-C021](#) [HMC-C024](#) [XB9XT-DPRS-721](#) [XBP24BZ7PIT-004J](#) [XBP9B-DMUTB022](#)
[nRF24L01P-MODULE-SMA](#) [CMD-KEY2-418-CRE](#) [XM-C92-2P-UA](#) [XB9XT-DPUS-721](#) [V640-A90](#) [HMC-C583](#) [MAAM-008818-TR3000](#)
[MTSMC-H5-U](#) [SIMSA868-PRO](#) [SIMSA915C-PRO](#) [SIMSA868C-PRO](#) [SIMSA433C-PRO](#) [SIMSA915-PRO](#) [XBP9B-DMUT-042](#) [HMC-C582](#)
[HMC-C022](#) [XBP9B-DPST-041](#) [XBP9B-DMWT-042](#) [SM-MN-00-HF-RC](#) [HMC-C031](#) [MT-02](#) [M1002GB](#) [702-W](#) [SIMSA868C-N-PRO](#)
[SIMSA433C-N-PRO](#) [SIMSA915C-N-PRO](#) [PEPPER WIRELESS C1 USB](#) [S2-1050J-Z0K4J](#) [S2-10732-Z1T61](#) [S2-10716-Z1W4E](#) [S2-107ET-Z1W6D](#)
[S2-10686-Z1L1D](#) [S2-10688-Z1L1T](#) [S2-106BA-Z1P20](#) [UC15EA-MINIPCIE](#) [SU60-2230C-PU](#) [TR-72DAT](#) [TR-76DA](#) [650201454G](#) [HM-TRLR-D-232-868](#) [HM-TRLR-D-TTL-433](#) [HM-TRLR-D-485-868](#)