

EAN CODE : 3760244880871

DOUBLE ALR3206D

2 outputs
Powerfull

VISUAL SOFT-TOUCH CONNECTED

- : Large graphic display
- : Sensitiv keypad
- : USB, RS485 & 0-10V isolated LabVIEW as a standard

PERFORMANCE COUPLING FUNCTIONS

- : output in the rear-panel, used for remote-sensing
- : Auto mode : Series, Parallel, Tracking
- : square, positive and negative ramp, rise or fall time

ELEGANT SPACE-SAVING PRACTICAL

- : New design and feathery
- : vertical & COMPACT BOX / 390W
- : Lightweight with built-in handle and cord storage area.

QUIET LOCKING

- : Silent temperature-controlled fan cooling.
- : configuration & stand-by




390 WATTS

- 2 x 0 - 32 V 0 - 6 A or
- 1 x ± 0 - 32 V 0 - 6 A or
- 1 x 0 - 64 V 0 - 6 A or
- 1 x 0 - 32 V 0 - 12 A

LabVIEW



ULTRA-COMPACT

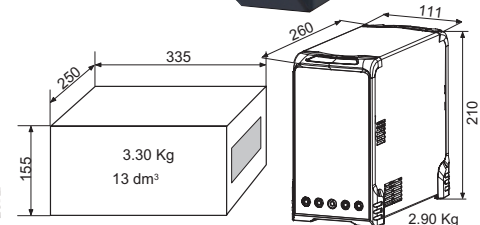

Specifications

- Floating outputs : on 4mm safety terminals in the front-panel, and on spring terminal block with levers for 2mm² on the rear-panel.
- Automatic constant voltage and current operation.

Channel 1 and 2	MASTER AND SLAVE			
	Independent	Tracking	Series	Parallel
Output voltage	2 x 0 - 32 V	± 0 - 32 V	0 - 64 V	0 - 32 V
Minimum voltage	± 10 mV	± 10 mV	± 20 mV	± 10 mV
Adjustment accuracy	0.03% or ±10 mV (20 mV in series)			
Ripple (mV rms)	< 0.7 mV	< 0.7 mV	< 1.5 mV	< 1 mV
Pics of commutation (BP 20 MHz)	< 15 mVpp	< 15 mVpp	< 30 mVpp	< 30 mVpp
Regulation / load 0 to 100%	12 mV	12 mV	24 mV	40 mV
Regulation / source ±10%	1 mV	1 mV	2 mV	1 mV
Time of answer load 10 to 90%	2 ms	2 ms	2 ms	5 ms
Display resolution	10mV	10mV	20mV	10mV
Accuracy measurement	0.03% or ±10 mV (20 mV in series)			
Display	4 digits + parameters on graphic LCD			
Output current	2 x 0 - 6 A	± 0 - 6 A	0 - 6 A	0 - 12 A
Minimum current	2 mA	2 mA	2 mA	10 mA
Adjustment accuracy	0.03% or ±2 mA (10 mA in series)			
Ripple (mArms)	<1 mA	<1 mA	<1 mA	<1 mA
Regulation / load 0 to 100%	1 mA	1 mA	2 mA	2 mA
Regulation / source ±10%	1 mA	1 mA	1 mA	1 mA
Display resolution	2 mA	2 mA	2 mA	10 mA
Accuracy measurement	0.03% or ±2 mA (10 mA in series)			
Display	4 digits + parameters on graphic LCD			

Protections

- Against short-circuits, by current regulation.

- Against overtemperature by fan and thermal circuit-breaker.
- Against overcurrent on main input, by internal fuses.

Various and functions

- Display : Graphic LCD 128 x 64 pixels with white backlight. Visualization of all parameters (CV, CC, RMT, etc...)
- Memory : 16, including 15 configurable.
- OVP/OCV : Against overvoltage and overcurrent, adjustable from 0 to maxi.
- Functions : 6 available on U or I (Arbitrary, square, rising and falling periodically ramp, rise or fall time single shot). Time adjustment from 10ms to 60mn.
- Remote sensing : 4 wires mode on the back-side's terminal blocks. Correction of the voltage drop in the wires : 2V
- Standby : output, enable / disabled and standby of the power supply.

Interfaces

All the interfaces are insulated of the output (150V max).

- USB and RS485 are standard.
- LabVIEW's drivers as a standard.
- Controller 0 - 10V : by direct input 0 - 10V for U for each channel or for U & I for channel 1 or potentiometer 10K or adjustable resistance 10K. In the back side on disconnect scribe terminal blocks.

Other specifications

- Safety : Class I, enhanced safety between mains input and outputs. Complies with EN 61010-1, CAT II.
- CEM : Complies with EN 61326-1 and EN 55011.
- Input voltage : 220 - 240 Volts ±10%, 50 / 60Hz.
- Mains input : socket C14 with C13 2 poles + earth cable removable
- Power consumption : 475W maxi.
- Efficiency : > 81% of the maxi powerful.
- Operating temperature : +5 to +40°C.
- Coefficient of temperature /°C : 0.01% for the voltage and the current.
- Voltage on the earth : 100V Max.
- Presentation : Front-panel with sensitiv keypad, rear-panel with handle and cord storage area, metallic case with epoxy finish.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ELC manufacturer](#):

Other Similar products are found below :

[LED2472MA2](#) [ALE2902M](#) [DR04](#) [ALR3206D](#) [ALR3206T](#) [ALE2412](#) [ALE1225](#) [ALE2405R](#) [DR06](#) [DL07](#) [ALF1202](#) [ALE1502D](#) [DR08](#)
[DR07](#)