


**Notes:**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking includes "ConductRF", Part No. & Serial No., Black Text.
3. Mark Shrink Tube on both connectors ends with "DC-18GHz"
4. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
5. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
5. 100% Tested DC to 18GHz, Plotted Data supplied with assembly.
7. Caps to be Fitted Prior to Packaging
8. Cables to be Coiled and Placed in Bag with ConductRF Label.(See Separate Label Instruction)


## Site-Flex Phase Stable Rugged RF Test Cable

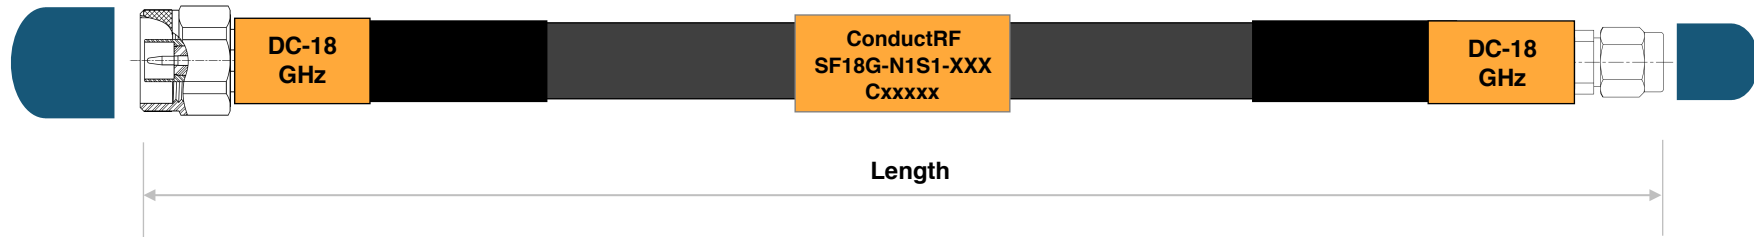

XXX	Length	Max Insertion Loss(dB)		
		9GHz	12GHz	18GHz
1M0	1M	1.729	2.063	2.664
F03	3ft	1.601	1.909	2.463
F05	5ft	2.521	3.012	3.897
F08	8ft	3.901	4.666	6.048
F10	10ft	4.821	5.769	7.482
F12	12ft	7.121	8.527	11.067
VSWR(max)		1.30:1		

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)  
 SXX = Length in Inches (eg S18=18")  
 XMX = Length in Meters (eg 2M5=2.5m)  
 CXX = Length in CM (eg C50=50cm)

					<b>Customer DWG</b>	Title: <b>Site-Flex - Type-N Male to SMA Male - DC-18GHz</b>				
					Remarks:	Originated: 02/19/16	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: SF	Sheet 1 of 1	
								Dwg Ref: SF18G-N1S1		
1	Pre-Release		DG	10/18/16	Tolerances: Length +/-2%	Checked: JW	Approved: PL	Rev: 1	Part No: <b>SF18G-N1S1-XXX</b>	
REVISION HISTORY										

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [CONDUCTRF](#) manufacturer:*

Other Similar products are found below :

[SF18G-N1S1-F05](#) [VNA18-N1N1-S24](#) [VNA40-DNFD1-S24](#) [SF27G-E1EF-1M0](#) [SW50G-C1CF-1M0](#) [TSA74-N1S1-1M0](#) [PFA61-D1D1-1M0](#)  
[SF27G-EFEF-1M0](#) [PFA61-C1C1-1M0](#) [SF07G-N1D1-F05](#) [SW50G-CFCF-1M0](#) [VNA18-N1NF-S24](#) [SF18G-N1N2-1M0](#) [SF09G-N1N1-F05](#)  
[TEA90-N1S1-1M0](#) [SF09G-N1NF-F05](#) [TEA90-N1N1-1M0](#) [SF18G-N1NF-1M0](#) [SF18G-N1N1-1M0](#)