

Key Features

- Compact size
- 2.4 - 2.5GHz operation



General Description

The Siretta 2.4GHz PCB antenna is based on an efficiently tuned PCB element that is matched and embedded to work with a wide variety of RF modules operating on the 2.4GHz ISM band frequency.

Popular in Bluetooth, Zigbee and WLAN embedded applications, the antenna allows users a longer working range than a standard on board chip antenna which is offered on many modules. Connected via an Ipex (UFL compatible) connector and 100mm cable the antenna PCB measures just 45 x 10mm ensuring a compact design which can be discreetly fitted in many of today's products where space is at a premium.

Key Specifications - Electrical

Operating temperature range:	-20 to +65°C
Impedance:	50 ohm
Gain:	2.6dBi
VSWR:	<1.6:1
Voltage and supply current:	Passive
Operating frequency:	2.4 - 2.5GHz
Polarization:	Vertical
Radiating element and wave:	¼ wave dipole

Key Specifications - Mechanical

Dimensions:	45mm x 10mm x 1mm (without cable)
Cable:	100mm x 1.13mm coax
Connector:	Ipex (UFL compatible)


Rev 1.2

Gain

WiFi

2400MHz	-20.48dBi
2500MHz	-21.45dBi


Gain vs. Frequency Graph

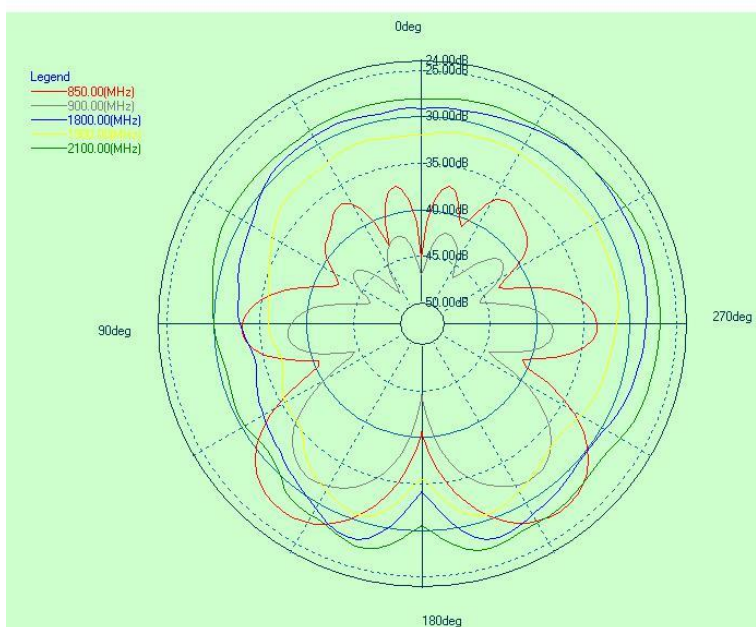


UL Tested (Basingstoke, UK)
Part: ECHO11/0.2M/IPEX/S/S/12

Test Reports

VSWR

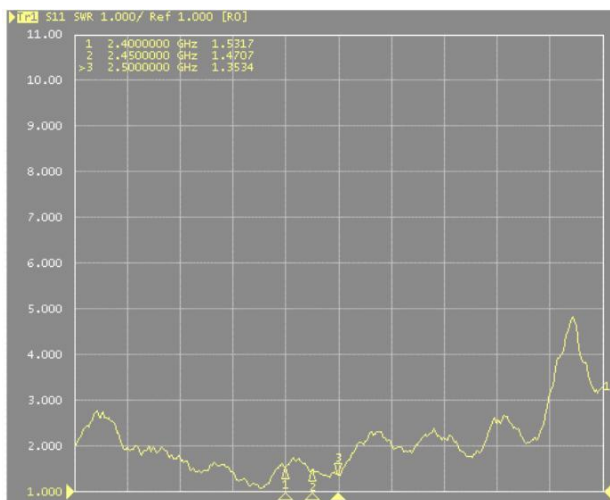

Return Loss

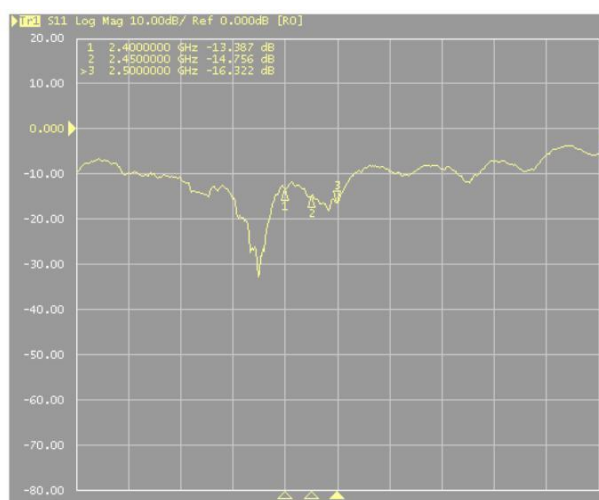

Ordering Details:

Part Number

Description

ECHO11/0.2M/IPEX/S/S/12

WiFi PCB Antenna, 100mm Cable, UFL Connector

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SIRETTA](#) manufacturer:

Other Similar products are found below :

[ALPHA4A/5M/SMAM/S/S/26](#) [DELTA5A/X/SMAM/S/S/17](#) [OSCAR17/X/TNC/S/S/19](#) [DELTA5A/X/BNCM/S/S/17](#) [SNYPER-LTE-SPECTRUM](#) [ASMA2000F058L13](#) [ASMA2000C058L13](#) [TANGO14/5M/LL/SMAM/S/S/24](#) [TANGO1/1M/FMEF/S/S/4](#) [ASME500F058L13](#) [TANGO3/0.5M/SMAM/S/S/31](#) [TANGO40/X/NTYPEF/S/S/32](#) [QUARTZ-W22-LTE\(EU\)+ACC](#) [ASMA500B174L13](#) [31557](#) [ECHO40/0.1M/UFL/S/S/32](#) [MIKE1A/5M/FMEF/S/S/20](#) [QUARTZ-W22-UMTS\(EU\)+ACC](#) [TANGO11A/2.5M/SMAM/S/S/19](#) [ASMA500F058L13](#) [ZETA-N-UMTS](#) [ECHO11/0.2M/IPEX/S/S/12](#) [ASMA300E174L13](#) [ASMA1000F058L13](#) [DELTA19/X/SMAM/S/S/35](#) [ASMA2000E058L13](#) [ASMZG300F058L13](#) [MIKE3A/5M/SMAM/S/S/17](#) [TANGO15/3M/SMAM/SMAM/S/S/24](#) [TANGO20/3M/SMAM/S/S/26](#) [ASMZG500A058L13](#) [ASMZG1500F058L13](#) [ALPHA1A/2.5M/SMAM/S/S/11](#) [OSCAR40/10M/LL/SMAM/S/S/33](#) [TANGO11A/5M/LL/SMAM/S/S/19](#) [TANGO29/1M/SMAM/RP/S/35](#) [ASME2000F058L13](#) [ASMK015X174S11](#) [LC300-N2-GPRS](#) [DELTA6A/X/SMAM/S/S/11](#) [MIKE1A/2.5M/FMEF/S/S/20](#) [ASMZG1000F058L13](#) [OSCAR41/X/NTYPEF/S/S/29](#) [TANGO22/3M/SMAM/SMAM/SMAM/26](#) [OSCAR420/0.4M/NTYPEF/S/S/19](#) [ASMK010X174S11](#) [ZETA-N2-GPRS](#) [ADAPT/SMAM/RP](#) [OSCAR18/X/NF/S/S/22](#) [TANGO14/3M/SMAM/S/S/24](#)