

Key Features

- $16 \pm 1\text{dB}$
- Internally mounted
- 10mm x 10mm x 6.2mm
- RoHS compliant




General Description

This is Siretta's smallest GPS embedded patch antenna measuring at only 10 x 10 x 6.2mm, making this antenna ideal for applications where minimising space is a premium requirement.

The Echo 19 has a built in LNA giving 16dB gain from just 10-14mA @ 3.3VDC current consumption and operating at 3.0 - 5.0V DC. Combined with an exceptionally small size, it is ideally suited to low power, small size applications and where it is being used with GPS modules with a built in pre amplifier circuit.

Additional Considerations

- Ideal for GPS receivers with built in LNA
- Designed for embedded applications with small footprint
- Compatible with many GPS engine manufacturers equipment
- Can be mounted on any surface
- Meets all EU compliance criteria for electronic goods

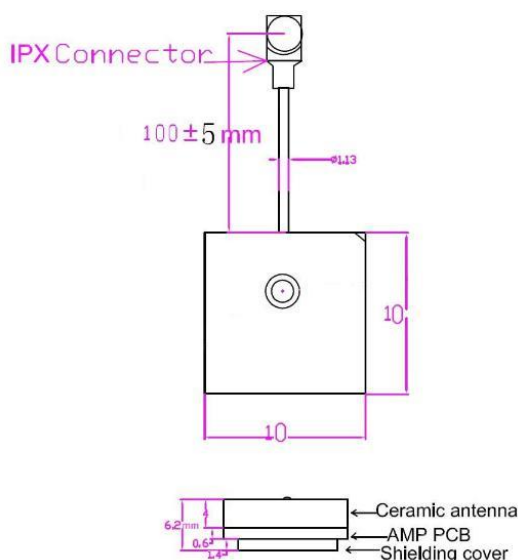

Rev 1.2

Key Specifications - Environmental


Operating temperature range:	-40 to +85°C
Storage temperature range:	-45 to +100°C
Impedance:	50 ohm
Gain:	16 ± 1dB
VSWR:	1.8:1
DC voltage:	3.0 ~ 5.0V DC
DC current:	10 ~ 15mA @ 3.3V DC
Centre frequency:	1575.42 ± 1.023MHz
Noise limiter:	<1.2dB
Polarization:	RHCP

Key Specifications - Mechanical


Dimensions:	10mm x 10mm x 6.2mm
Cable:	RF1.13 55mm
Connector:	IPEX

Test Reports

Gain

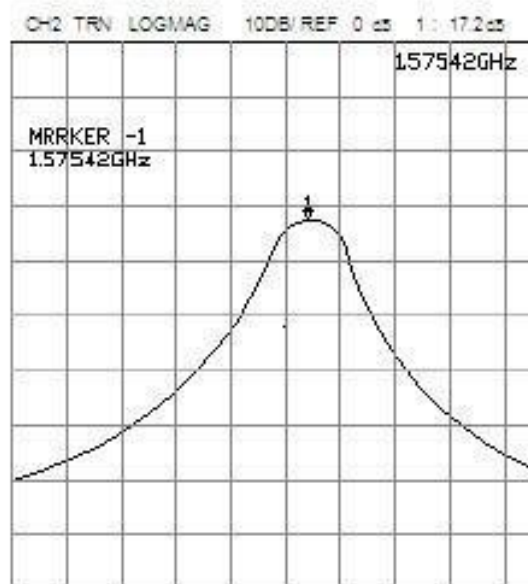

Radiation Pattern

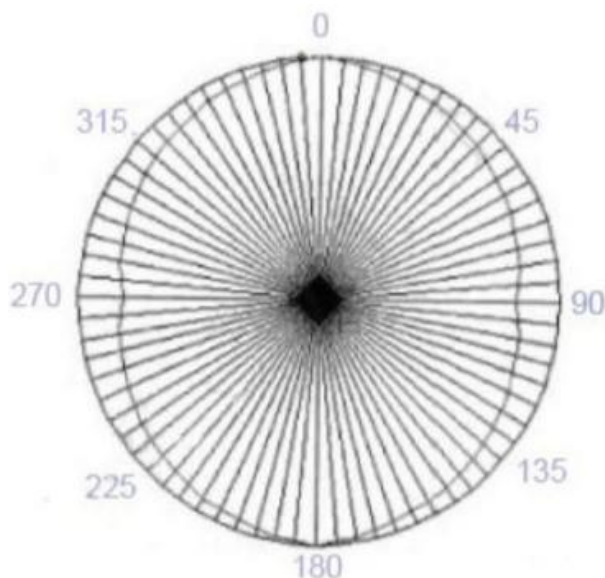

Part Number	Description
ECHO19/0.1M/UFL/S/S/17	10 x 10mm Active GPS Internal Antenna, 100mm Cable, uFL Connector

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SIRETTA](#) manufacturer:

Other Similar products are found below :

[ALPHA4A/5M/SMAM/S/S/26](#) [DELTA5A/X/SMAM/S/S/17](#) [OSCAR17/X/TNC/S/S/19](#) [DELTA5A/X/BNCM/S/S/17](#) [SNYPER-LTE-SPECTRUM](#) [ASMA2000F058L13](#) [ASMA2000C058L13](#) [TANGO14/5M/LL/SMAM/S/S/24](#) [TANGO1/1M/FMEF/S/S/4](#) [ASME500F058L13](#) [TANGO3/0.5M/SMAM/S/S/31](#) [TANGO40/X/NTYPEF/S/S/32](#) [QUARTZ-W22-LTE\(EU\)+ACC](#) [ASMA500B174L13](#) [31557](#) [ECHO40/0.1M/UFL/S/S/32](#) [MIKE1A/5M/FMEF/S/S/20](#) [QUARTZ-W22-UMTS\(EU\)+ACC](#) [TANGO11A/2.5M/SMAM/S/S/19](#) [ASMA500F058L13](#) [ZETA-N-UMTS](#) [ECHO11/0.2M/IPEX/S/S/12](#) [ASMA300E174L13](#) [ASMA1000F058L13](#) [DELTA19/X/SMAM/S/S/35](#) [ASMA2000E058L13](#) [ASMZG300F058L13](#) [MIKE3A/5M/SMAM/S/S/17](#) [TANGO15/3M/SMAM/SMAM/S/S/24](#) [TANGO20/3M/SMAM/S/S/26](#) [ASMZG500A058L13](#) [ASMZG1500F058L13](#) [ALPHA1A/2.5M/SMAM/S/S/11](#) [OSCAR40/10M/LL/SMAM/S/S/33](#) [TANGO11A/5M/LL/SMAM/S/S/19](#) [TANGO29/1M/SMAM/RP/S/35](#) [ASME2000F058L13](#) [ASMK015X174S11](#) [LC300-N2-GPRS](#) [DELTA6A/X/SMAM/S/S/11](#) [MIKE1A/2.5M/FMEF/S/S/20](#) [ASMZG1000F058L13](#) [OSCAR41/X/NTYPEF/S/S/29](#) [TANGO22/3M/SMAM/SMAM/SMAM/26](#) [OSCAR420/0.4M/NTYPEF/S/S/19](#) [ASMK010X174S11](#) [ZETA-N2-GPRS](#) [ADAPT/SMAM/RP](#) [OSCAR18/X/NF/S/S/22](#) [TANGO14/3M/SMAM/S/S/24](#)