

Key Features

- Miniature Design: 22.3 x 14.75mm
- Through Hole / Screw Mounting
- 2.4 to 2.5GHz Operating Frequency
- 0.5dBi Peak Gain



General Description

The Tango 26 is Siretta's MOST COMPACT miniature through-hole mount, WiFi / WLAN antenna. Measuring at an impressive 22 x 14.75mm, this is one of the most compact screw mount WiFi antennas on the market. The Tango 26 provides the user with a compact WiFi solution that can be securely fixed to its mounting surface. Despite a compact size, this antenna provides great WiFi performance for improved WiFi signal transmission and reception. This all lends a hand into making the Tango 26 ideal for WiFi applications that require a covert antenna solution.

The Tango 26 is tuned to operate within the 2.4 to 2.5GHz frequencies, making this antenna perfect for WiFi, Bluetooth and Zigbee applications. The Tango 26 achieves a reputable peak gain of 0.5dBi, helping to improve the short range signal transmission/reception of your WiFi modems, Bluetooth gadgets or even your low power ZigBee sensor.

The Tango 26 is supplied, as standard, with 100mm of RG174 coaxial cable, terminated with a reverse polarity SMA male connector. Custom cable lengths and alternative connector types can be supplied for volume requirements.

Additional Considerations

- Made out of durable ABS for long lasting antenna
- Supplied with a short cable to allow flexible mounting position
- 8mm long screw thread for secure through-hole mounting
- RoHS Compliant

Rev 1.2

Electrical Specifications

Operating temperature:	-30 to +60°C
Impedance:	50 ± 5ohm
Gain:	0.5dBi
VSWR:	≤ 2.0
Frequency range:	2.4 - 2.5GHz
Max power:	1 Watt
Isolation:	NA
Beamwidth:	H-PLANE - 360° E-PLANE - 68°
Polarization:	Vertical


Gain

WiFi

2400MHz	1.87dBi
2500MHz	1.67dBi

Mechanical Specifications


Dimensions:	Ø22.3 x x14.75mm
Weight:	11 ± 2g
Connector:	RP SMA Male
Cable:	100mm RG174 coaxial
RoHS compliant:	Yes

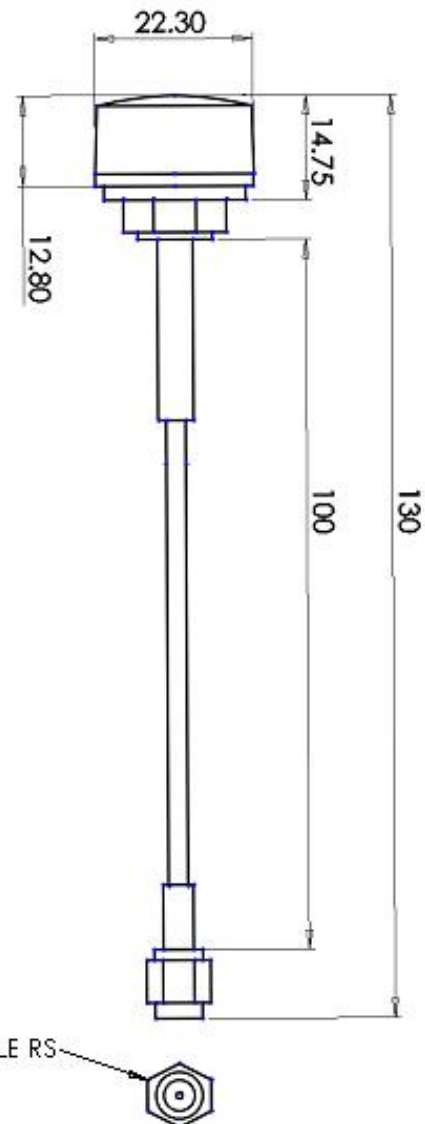


Recommended panel hole cutout (mm)

Test Reports

VSWR

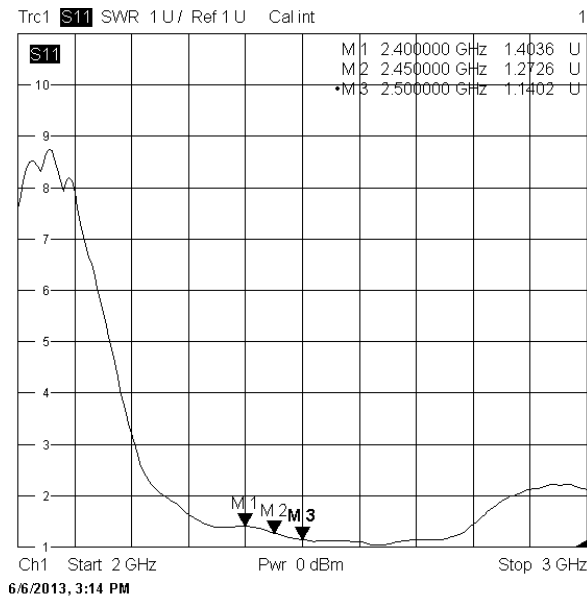


S11

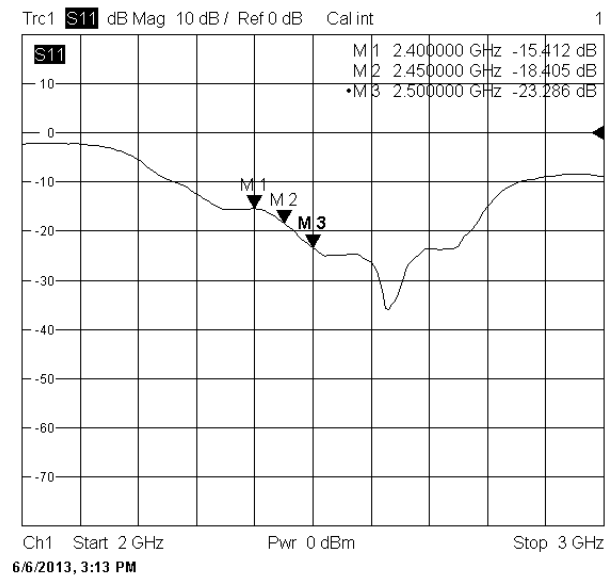


Radiation Patterns


H Plane

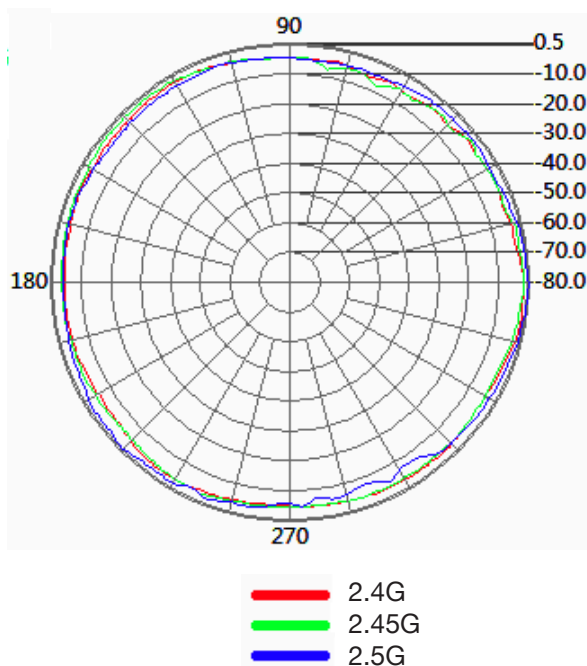

E Plane

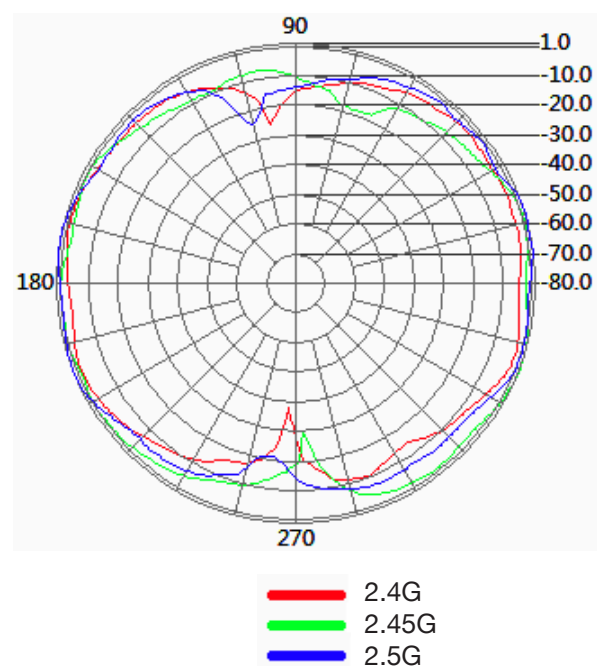

Gain vs. Frequency Graph

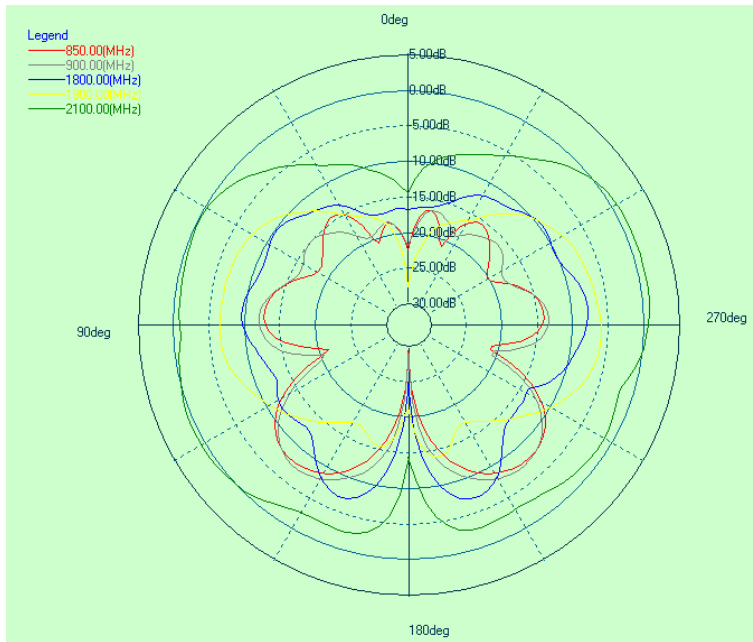

UL Tested (Basingstoke, UK)
Part: TANGO26/0.1M/SMAM/S/RP/29

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SIRETTA](#) manufacturer:

Other Similar products are found below :

[ALPHA4A/5M/SMAM/S/S/26](#) [DELTA5A/X/SMAM/S/S/17](#) [OSCAR17/X/TNC/S/S/19](#) [DELTA5A/X/BNCM/S/S/17](#) [SNYPER-LTE-SPECTRUM](#) [ASMA2000F058L13](#) [ASMA2000C058L13](#) [TANGO14/5M/LL/SMAM/S/S/24](#) [TANGO1/1M/FMEF/S/S/4](#) [ASME500F058L13](#) [TANGO3/0.5M/SMAM/S/S/31](#) [TANGO40/X/NTYPEF/S/S/32](#) [QUARTZ-W22-LTE\(EU\)+ACC](#) [ASMA500B174L13](#) [31557](#) [ECHO40/0.1M/UFL/S/S/32](#) [MIKE1A/5M/FMEF/S/S/20](#) [QUARTZ-W22-UMTS\(EU\)+ACC](#) [TANGO11A/2.5M/SMAM/S/S/19](#) [ASMA500F058L13](#) [ZETA-N-UMTS](#) [ECHO11/0.2M/IPEX/S/S/12](#) [ASMA300E174L13](#) [ASMA1000F058L13](#) [DELTA19/X/SMAM/S/S/35](#) [ASMA2000E058L13](#) [ASMZG300F058L13](#) [MIKE3A/5M/SMAM/S/S/17](#) [TANGO15/3M/SMAM/SMAM/S/S/24](#) [TANGO20/3M/SMAM/S/S/26](#) [ASMZG500A058L13](#) [ASMZG1500F058L13](#) [ALPHA1A/2.5M/SMAM/S/S/11](#) [OSCAR40/10M/LL/SMAM/S/S/33](#) [TANGO11A/5M/LL/SMAM/S/S/19](#) [TANGO29/1M/SMAM/RP/S/35](#) [ASME2000F058L13](#) [ASMK015X174S11](#) [LC300-N2-GPRS](#) [DELTA6A/X/SMAM/S/S/11](#) [MIKE1A/2.5M/FMEF/S/S/20](#) [ASMZG1000F058L13](#) [OSCAR41/X/NTYPEF/S/S/29](#) [TANGO22/3M/SMAM/SMAM/SMAM/26](#) [OSCAR420/0.4M/NTYPEF/S/S/19](#) [ASMK010X174S11](#) [ZETA-N2-GPRS](#) [ADAPT/SMAM/RP](#) [OSCAR18/X/NF/S/S/22](#) [TANGO14/3M/SMAM/S/S/24](#)