


Multi-Purpose Programmable Timer

SA-025Q

The **ENFORCER® SA-025Q Multi-Purpose Programmable Timer** is suitable for use with a wide range of timed security and access control products, such as electric door strikes, sirens, or bells. DIP switches for programming and auto-sensing of input voltage make installation easy.


Features:

- Timer can be set from 1 second to 60 minutes
- Can be triggered by positive voltage (+DC), or closure or opening of dry contact
- Relay can be programmed to activate at the start or at the end of the timing cycle
- Relay can also be set to activate for one second at the end of the timing cycle
- Programmable for pulse (flash) activation
- Built-in reset function to manually reset timing cycle
- Form C relay, contacts rated 8A@120VAC/24VDC
- LED indicates relay is energized
- 12VDC/24VDC Operation (auto sensing)
- Current: 1mA (standby), 50mA (active)
- Board measures 2 7/8" x 2 1/2" (73x63 mm)
- Functions programmed via DIP switches – no jumpers to cut

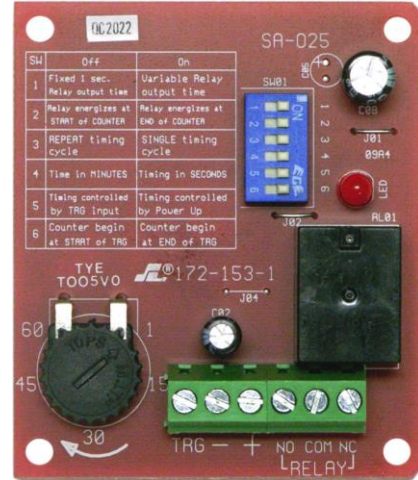

Sample Application:

In this application, the **SA-025Q** is connected to an electric strike (**SD-995C**) and an N.O. contact or switch. The output is set via the DIP switches for a momentary trigger with no delay.

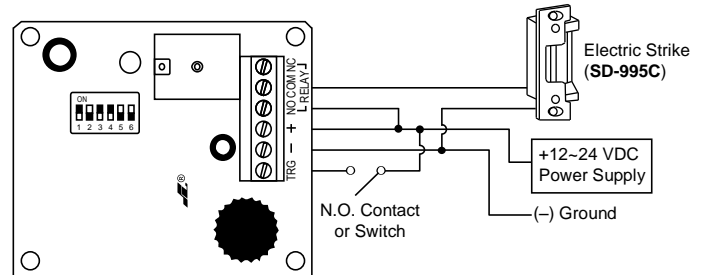

Also Available from SECO-LARM®:



SA-026Q
Miniature
Timer Module



SA-025EQ
Delayed Egress
Timer



SA-027WQ
7-Day
Timer



SA-027HQ
365-Day
Annual Timer

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SECO-LARM](#) manufacturer:

Other Similar products are found below :

[SS-090-2H1](#) [ST-2406-5A](#) [SL-1301-BAQ/C](#) [SA-027WQ](#) [SD-7202GC-PT](#) [SL-1301-BAQ/B](#) [SM-4105-LQ/B](#) [82-12781](#) [E-936-S45RRGQ](#) [SM-4103-TQ/W](#) [E-941SA-1200](#) [SD-7201GCPE1Q](#) [SK-990AQ](#) [SS-090-2H0](#) [SM-226R-3Q](#) [SD-7202GC-PEQ](#) [E-941SA-300RQ](#) [SM-4104-TQ/W](#) [SM-205Q/BR](#) [SR-1212-C2ALQ](#) [SM-4601-LQ](#) [SA-025Q](#) [SL-126Q/C](#) [SM-200Q/BR](#) [CA-1615-06LQ](#) [SS-074Q/BG](#) [CA-1515Q](#) [SM-4201-LQ](#) [SK-91ERSD](#) [SM-4303-TQ/W](#) [SK-1011-SDQ](#) [SM-216Q/GY](#) [NE-SE01-020Q](#) [CA-1610-3FLQ](#) [NJ-P101M-PQ](#) [SM-226RQ](#) [SS-073Q](#) [SL-126Q/R](#) [SL-126Q/A](#) [SL-1312-SA/R](#) [SL-126Q/B](#) [SM-204Q/W](#) [SM-207-5Q/BR](#) [SM-4102-TQ/W](#) [SM-4301-TQW](#) [CA-1616Q](#) [SM-4601-L3Q](#) [SL-1301-BAQ/R](#) [SM-226LQ](#) [SM-226L-3Q](#)