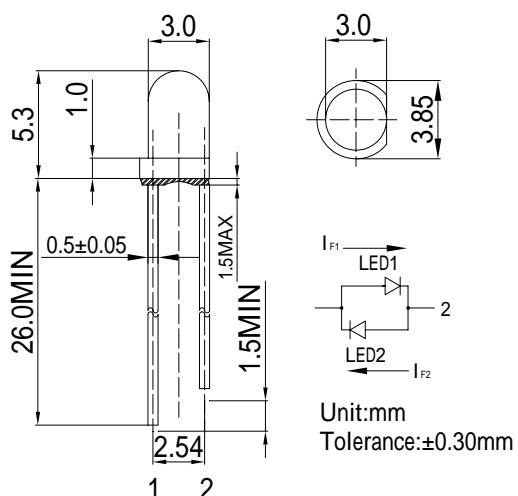


**■Features**

- High Luminous LEDs
- 3mm Round Standard Directivity
- Long Lifetime Operation
- Superior Weather-resistance
- UV Resistant Epoxy/ Water Clear Type
- AC LED

**■Applications**

- Toys
- Audio
- Games
- Other Lighting

**■Outline Dimension**

**■Absolute Maximum Rating**
**(Ta=25 °C)**

| Item                       | Symbol           | Value      |      | Unit |
|----------------------------|------------------|------------|------|------|
|                            |                  | LED1       | LED2 |      |
| DC Forward Current         | I <sub>F</sub>   | 30         | 30   | mA   |
| Pulse Forward Current*     | I <sub>FP</sub>  | 100        | 100  | mA   |
| Reverse Voltage            | V <sub>R</sub>   | 5          | 5    | V    |
| Power Dissipation          | P <sub>D</sub>   | 78         | 78   | mW   |
| Operating Temperature      | T <sub>opr</sub> | -30 ~ +85  |      |      |
| Storage Temperature        | T <sub>tsg</sub> | -40 ~ +100 |      |      |
| Lead Soldering Temperature | T <sub>sol</sub> | 260 /5sec  | -    |      |


\*Pulse width Max.10ms Duty ratio max 1/10

**■Electrical -Optical Characteristics**
**(Ta=25 °C)**

| Item                 | NO.  | Symbol            | Condition             | Min. | Typ. | Max. | Unit |
|----------------------|------|-------------------|-----------------------|------|------|------|------|
| DC Forward Voltage   | LED1 | V <sub>F1</sub>   | I <sub>F1</sub> =20mA | 1.8  | 2.1  | 2.6  | V    |
|                      | LED2 | V <sub>F2</sub>   | I <sub>F2</sub> =20mA | 1.8  | 2.1  | 2.6  | V    |
| Dominant Wavelength* | LED1 | λ <sub>D1</sub>   | I <sub>F1</sub> =20mA | 585  | 590  | 595  | nm   |
|                      | LED2 | λ <sub>D2</sub>   | I <sub>F2</sub> =20mA | 585  | 590  | 595  | nm   |
| Luminous Intensity*  | LED1 | I <sub>V1</sub>   | I <sub>F1</sub> =20mA | 1120 | 1560 | -    | mcd  |
|                      | LED2 | I <sub>V2</sub>   | I <sub>F2</sub> =20mA | 1120 | 1560 | -    | mcd  |
| 50% Power Angle      | LED1 | 2θ <sub>1/2</sub> | I <sub>F1</sub> =20mA | -    | 30   | -    | deg  |
|                      | LED2 | 2θ <sub>1/2</sub> | I <sub>F2</sub> =20mA | -    | 30   | -    | deg  |

\*Tolerance of dominant chromaticity is ±10%

\*2 Tolerance of luminous intensity is ±15%

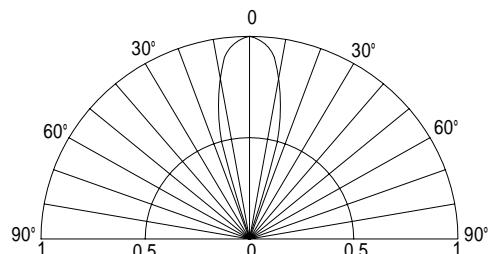**■Directivity**


# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Standard LEDs - Through Hole category:***

***Click to view products by Optosupply manufacturer:***

Other Similar products are found below :

[LTL-10254W](#) [LTL-1214A](#) [LTL-1BEDJ](#) [LTL-2231AT](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-5234](#) [LTL87HTBK](#) [LTW-87HD4B](#) [7383/V7C3-BSTA-L/PR3/MS](#) [G22041431007J2C000](#) [HLMP-AG64-X10ZZ](#) [HLMP-EG1A-Z10DV](#) [HLMP-EL3B-WXKDD](#) [HLMP-HB74-UVBDD](#) [HLMP-HG65-VY0DD](#) [HLMP-HM74-34CDD](#) [HLMP-HM75-34CDD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [C4SMA-BGF-CQ34Q3C2L53GC13](#) [264-7SURTS530-A3](#) [L-C150JRCT](#) [S4SMS-BJF-CQ42QGF2](#) [S4SMS-GJF-CW12QMF2](#) [LD CQDP-1U3U-W5-1-K](#) [LNX998CKBDA](#) [LO566UHR3-70G-A3](#) [SLA560WBD2PT3](#) [LP379PPG1C0G0300001](#) [SLR-322MCT32](#) [SLR-342DUT32](#) [SLR-342MC3F](#) [SLR343BC7TT32](#) [SLR343BCTT32](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [SNW-LX504SRC/4](#) [1.90690.3330000](#) [SSL-LX20483ID](#) [SSL-LX3034YD](#) [SSL-LX5093LGT-11](#) [SSL-LX5093PGC](#) [SSL-LX5093SRC/F](#) [SSL-LX5093SYT](#) [SSL-LX5099SRSGC-CA](#) [SSL-LX509E3SIT](#) [SSL-LX509FT3ID](#)