

Economical Infrared Temperature Sensor

Features USB Interface and Free Charting and Logging Software

IR-USB



Optional

- ✓ Connects Directly to a USB Port on Your Computer
- ✓ Free TRH Central Software for Download from OMEGA Converts Your PC into a Temperature Meter, Data Logger or Chart Recorder
- ✓ -18 to 538°C (0 to 1000°F) Measurement Range
- ✓ Adjustable Emissivity from 0.10 to 1.0

The IR-USB infrared temperature sensor provides a reliable and economical method for most non-contact temperature monitoring applications. Each unit is factory calibrated to provide excellent sensitivity, fast response, and stability. The unit features a IR sensor/signal conditioner installation with a direct USB connection. The free user software converts your PC into a temperature meter, chart recorder or data logger. A mounting kit is also available that allows for wall or duct mounting.

Specifications

PC Interface: USB

USB Cable: Integral to sensor, 2 m (6') shielded Type A plug

Software (Included): Requires Windows® 2000, XP, Vista or Windows 7 operating system

Temperature Range: -18 to 538°C (0 to 1000°F)

Thermocouple Probe with USB Connection Available. See Model TJ-USB at OMEGA




IR-USB

IR sensor head.


Laptop not included.

- Accuracy @ 22°C (72°F) Ambient Temperature and Emissivity of 0.95 or Greater:** ±2% rdg or 2.2°C (4°F), whichever is greater
- Optical Field of View:** 6:1 (distance/spot size)
- Repeatability:** ±1% rdg
- Spectral Response:** 5 to 14 microns
- Response Time:** 100 ms (0 to 63% of final value)
- Emissivity Range:** 0.1 to 1.00, adjustable
- Operating Temperature**
- Sensor Head:** 0 to 70°C (32 to 158°F)
- Sensor Head (-HT Model):** 0 to 85°C (32 to 185°F)
- Sensor Head with OS100-WC (Water Cooling Jacket):** 0 to 200°C (32 to 392°F)
- Operating Relative Humidity:** Less than 95% RH, non-condensing
- Water Flow Rate (OS100-WC):** 0.25 GPM, room temperature

- Thermal Shock:** ~30 minutes for 25°C (77°F) abrupt ambient temperature change
- Warm-Up Period:** 3 minutes
- Air Flow Rate (OS100-AP):** 1 CFM (0.5 L/s) (1 x 2.5")
- Laser Sight Accessory (OS100-LS)**
- Wavelength (Color):** 630 to 670 nm (red)
- Maximum Laser Power Output:** <1 mW

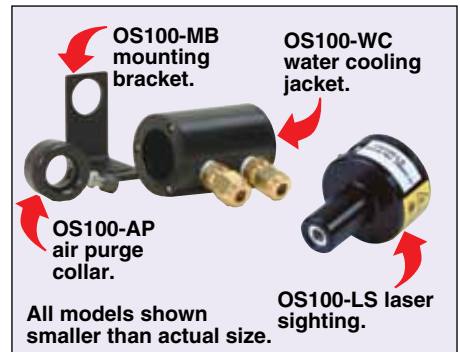

All models shown smaller than actual size.

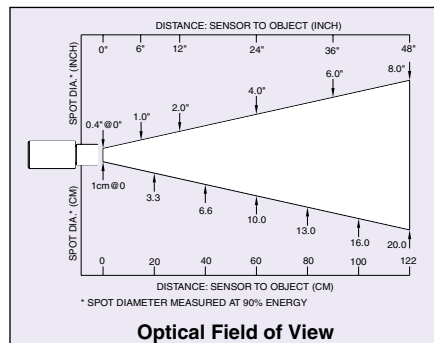

To Order

Model No.	Description
IR-USB	Infrared temperature sensor with USB connection

Accessories

Model No.	Description
CAL-3-IR	NIST traceable calibration with 3 data points
OS100-MB	Mounting bracket
OS100-AP	Air purge collar
OS100-WC	Water cool jacket, up to 200°C (392°F)
OS100-LS	Laser sighting accessory

Comes complete with an integral shielded 2 m (6') USB cable with Type A connector, mounting nut and operator's manual. Free TRH central software available for download from OMEGA.

Add "-HT" for high temperature sensor head for additional cost.

Ordering Example: IR-USB Infrared temperature sensor and OS100-MB mounting bracket.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Omega manufacturer](#):

Other Similar products are found below :

[DPG409-100DWU](#) [OM-DAQXL-1-NA](#) [CASS-116U-12](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#) [HPC-AU-P](#) [HPC-IR-P](#) [JMQSS-062U-6](#) [KHSS-18G-RSC-12](#) [KHXL-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-18G-12](#) [KQXL-18U-12](#) [NB1-CAXL-14U-12](#) [NB3-CAXL-14U-18](#) [P-M-1/10-1/4-6-0-P-3](#) [PX309-015A5V](#) [PX309-1KGI](#) [PX309-10KGV](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GI](#) [PX309-100GV](#) [PX309-3KG5V](#) [PX319-V050G5V](#) [PX319-005AI](#) [PX319-050A5V](#) [PX319-050GI](#) [PX319-10KGI](#) [PX319-100GV](#) [PX319-2KGI](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-5KG5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#) [PX329-10KGI](#) [PX329-2KGI](#) [PX409-015DWUI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-10WDWU5V](#)