




Stainless steel Thermopockets & Thermowells

Stainless steel fabricated (all-welded) Thermopockets & solid drilled Thermowells

Stainless steel thermopockets of various sizes, designed for use with industrial style temperature probes to provide protection for the sheathing from corrosive media, and to facilitate probe replacement without disturbing the process

Fabricated Thermopockets (complete with compression fitting)

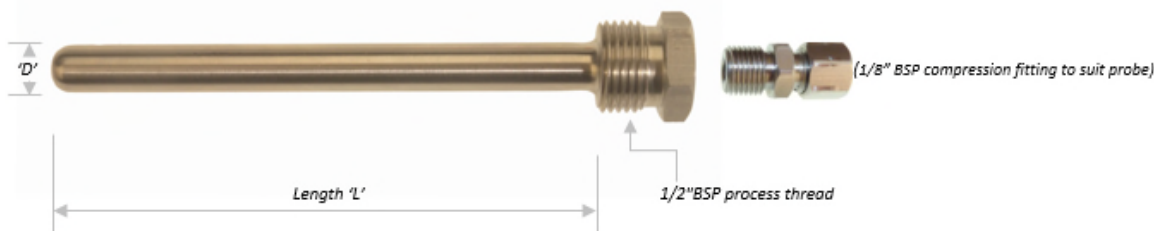

- Fabricated 316 stainless steel thermopocket
- All welded construction
- Suitable with 3.0 or 6.0mm diameter probes
- 1/2" BSP parallel process thread
- 25.4mm A/F hex (pockets to suit 6.0mm probe)
- 22mm A/F hex (pockets to suit 3.0mm probe)
- Supplied complete with stainless steel compression fitting to suit probe

Suits probe DiaØ	Process Thread	*Immersion Length 'L'	Pocket Dia 'D'	C/W fitting /to suit	Order Code
6.0mm	1/2" BSP Parallel	100mm	11.1mm	Yes/6.0mm	XF-1247-FAR
6.0mm	1/2" BSP Parallel	150mm	11.1mm	Yes/6.0mm	XF-1244-FAR
6.0mm	1/2" BSP Parallel	350mm	11.1mm	Yes/6.0mm	XF-1245-FAR
6.0mm	1/2" BSP Parallel	550mm	11.1mm	Yes/6.0mm	XF-1246-FAR
3.0mm	1/2" BSP Parallel	100mm	8.0mm	Yes/3.0mm	XF-1248-FAR
3.0mm	1/2" BSP Parallel	150mm	8.0mm	Yes/3.0mm	XF-1249-FAR

*To allow full insertion of probe into pocket then length of probe to be used should be a minimum of 50mm longer than immersion length 'L' shown

About Labfacility

Formed in 1971, Labfacility specialize in the field of Temperature and Process Measurement.

We are the largest UK manufacturer of both temperature sensors and thermocouple connectors.

Quality & Service

Quality and Service are key elements in the continued growth of Labfacility.

Technical support is always freely available from our experienced technical sales teams and the company has ISO9001 accreditation.

Contact Details

Email
sales@labfacility.com

Website
www.labfacility.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [labfacility manufacturer](#):

Other Similar products are found below :

[CT-Z4-PFA-K-2](#) [MD-ISK-S45-250-P5-IEC](#) [MC-ISK-S60-300-KNS-I](#) [RAA-S3A-60-100-P1-2.0-C1-T](#) [WT-304-ANSI X 100M](#) [IM-B-PCB](#)
[XF-945-FAR](#) [XF-946-FAR](#) [XF-947-FAR](#) [XF-949-FAR](#) [XF-955-FAR](#) [XF-960-FAR](#) [XF-962-FAR](#) [XF-966-FAR](#) [XF-989-FAR](#) [XF-1216-](#)
[FAR](#) [XF-1172-FAR](#) [XF-1222-FAR](#) [XF-1238-FAR](#) [XF-1190-FAR](#) [XF-1109-FAR](#) [XF-1110-FAR](#) [XF-1140-FAR](#) [XF-1111-FAR](#) [XF-1112-](#)
[FAR](#) [XF-1136-FAR](#) [XF-1149-FAR](#) [XF-1150-FAR](#) [XF-1151-FAR](#) [XF-1146-FAR](#) [XF-1245-FAR](#) [XF-1249-FAR](#) [XF-1113-FAR](#) [XF-1178-](#)
[FAR](#) [XF-1180-FAR](#) [XF-1183-FAR](#) [XF-1184-FAR](#) [XF-1255-FAR](#) [XF-1258-FAR](#) [XF-1265-FAR](#) [XF-1266-FAR](#) [XF-1274-FAR](#) [XF-1277-](#)
[FAR](#) [XF-1283-FAR](#) [XF-1288-FAR](#) [XF-1293-FAR](#) [XF-1300-FAR](#) [XF-1307-FAR](#) [XF-1316-FAR](#) [XF-1319-FAR](#)