



Main

| | |
|-------------------------------|---|
| Range of product | Preventa Safety automation |
| Product or component type | Preventa safety module |
| Safety module name | XPSAK |
| Safety module application | For emergency stop, switch, sensing mat/edges or safety light curtain monitoring |
| Function of module | Monitoring of electro-sensitive protection equipment (ESPE) Multiple emergency stop monitoring 2-channel wiring Emergency stop monitoring 1-channel wiring Monitoring of a movable guard associated with 2 switches and automatic start Sensing mat and edges monitoring Emergency stop with 2 NC contacts monitoring 2-channel wiring Proximity sensor monitoring Monitoring of a movable guard |
| Safety level | Can reach PL e/category 4 conforming to EN/ISO 13849-1 Can reach SILCL 3 conforming to EN/IEC 62061 |
| Safety reliability data | DC > 99 % conforming to EN/ISO 13849-1 MTTFd = 154.5 years conforming to EN/ISO 13849-1 PFHd = 7.39E-9 1/h conforming to EN/IEC 62061 |
| Type of start | Configurable |
| Connections - terminals | Captive screw clamp terminals, clamping capacity: 2 x 0.5...2 x 1.5 mm ² flexible cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 1 x 0.14...1 x 2.5 mm ² flexible cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 1 x 0.14...1 x 2.5 mm ² solid cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 1 x 0.25...1 x 1.5 mm ² flexible cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 1 x 0.25...1 x 2.5 mm ² flexible cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 2 x 0.14...2 x 0.75 mm ² flexible cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 2 x 0.14...2 x 0.75 mm ² solid cable with cable end, with double bezel Captive screw clamp terminals, clamping capacity: 2 x 0.25...2 x 1 mm ² flexible cable with cable end, with double bezel |
| Output type | Relay instantaneous opening 3 NO, volt-free |
| Number of additional circuits | 1 NC + 4 solid state outputs |
| [Us] rated supply voltage | 110 V AC (- 15...10 %) 24 V DC (- 15...10 %) |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Complementary

| | |
|---|---|
| Synchronisation time between inputs | Unlimited (manual start) 2 or 4 s depending of wiring (automatic start) |
| Supply frequency | 50/60 Hz |
| Power consumption in VA | <= 6 VA AC |
| Input protection type | Internal, electronic |
| [Uc] control circuit voltage | 24 V DC |
| Line resistance | 28 Ohm |
| Breaking capacity | C300 : 180 VA, AC-15 (holding) for relay output C300 : 1800 VA, AC-15 (inrush) for relay output |
| Breaking capacity | 1.5 A at 24 V (DC-13) time constant: 50 ms for relay output |
| Output thermal current | 6 A per relay for relay output |
| [Ith] conventional free air thermal current | 18 A |
| Associated fuse rating | 4 A fuse type gG or gL for relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200 6 A fuse type fast blow for relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200 |
| Minimum output current | 10 mA for relay output |
| Minimum output voltage | 17 V for relay output |
| Response time on input open | <= 40 ms |
| [Ui] rated insulation voltage | 300 V (degree of pollution: 2) conforming to DIN VDE 0110 part 1 300 V (degree of pollution: 2) conforming to IEC 60947-5-1 |
| [Uimp] rated impulse withstand voltage | 4 kV overvoltage category III conforming to IEC 60947-5-1 4 kV overvoltage category III conforming to DIN VDE 0110 part 1 |
| Local signalling | 4 LEDs |
| Current consumption | 30 mA at 24 V AC (on power supply) |
| Mounting support | 35 mm symmetrical DIN rail |
| Product weight | 0.4 kg |


Environment

| | |
|---------------------------------------|--|
| Standards | EN/IEC 60947-5-1 EN/IEC 60204-1 EN 1088/ISO 14119 EN/ISO 13850 |
| Product certifications | UL CSA TÜV |
| IP degree of protection | IP20 (terminals) conforming to EN/IEC 60529 IP40 (enclosure) conforming to EN/IEC 60529 |
| Ambient air temperature for operation | -10...55 °C |
| Ambient air temperature for storage | -25...85 °C |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Dimensions

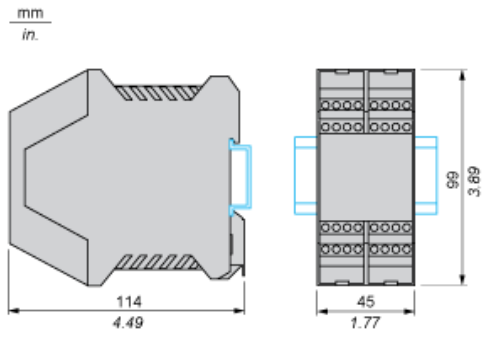

Wiring Diagrams

Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:

XPSAC5121
module XPSAC - Emergency stop - 24 V AC DC
[Download XPSAC5121 product datasheet](#)

Download & Documents 1 to 3 of 3 (Total: -1)

Instruction sheet

| | | |
|---|--------------------|----------|
| XPSAC... Safety module for emergency stop and switch monitoring | English 2012-07-04 | pdf (29) |
|---|--------------------|----------|

Image of product

| | | |
|--------------------------------------|------------|------------|
| Emergency stop and switch monitoring | 2010-11-10 | (Select :) |
|--------------------------------------|------------|------------|

Certificate

| | | |
|---------------------|--------------------|----------|
| Russian certificate | English 2010-07-07 | pdf (60) |
|---------------------|--------------------|----------|

1

2

- 1 Click on Download & Documents.
- 2 Click on Instruction sheet.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [schneider manufacturer](#):

Other Similar products are found below :

[LU9M1](#) [7D](#) [7S](#) [7XA1](#) [FNQR2](#) [8501RS44V24](#) [8501RSD14P14V51](#) [8501XO20V03Y414](#) [9001KXRK](#) [9001SKR9P35RH25](#) [9001SKT35L31](#)
[9003K2C003GA](#) [9007AA1](#) [9007BA1](#) [9007C54D](#) [9007C62A2](#) [9007CA11](#) [9007FA3](#) [9007HA4](#) [9007HA6](#) [9007KA1](#) [9007KB11](#)
[9007MS01S0206](#) [9007MS02S0300](#) [9012GAR4](#) [9012GAW2](#) [9012GBW1](#) [9012GDW5E3](#) [9012GFW1](#) [9012GNG1](#) [9012GNG3](#) [9012GNG6](#)
[9013FHG39J69](#) [9013GHG2J30](#) [9050JCK2F30V14](#) [GV2P10](#) [GVAN20](#) [GZ1E02](#) [A9F04616](#) [ABL8RPS24030](#) [RMPT20BD](#) [ATS01N206QN](#)
[CAD32BD](#) [CAD32F7](#) [CAD50BD](#) [CAD50P7](#) [RSL1PRJU](#) [9001KA35](#) [9001KA3G](#) [9001KA4](#)