


**Compact I/O station for DeviceNet**  
**4 digital inputs, 4 universal digital channels**  
**FDN20-4S-4XSG-E**

**TURCK**  
 world

Industrial  
 Automation

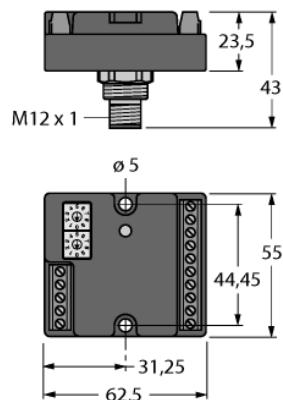

- DeviceNet™ slave
- Screw-clamp terminal block, 5-pin, for DeviceNet™ fieldbus connection
- Rotary coding switch for setting the DeviceNet™ address
- M12 built-in flange for easy mounting and connection to DeviceNet™
- 4 digital inputs
- 4 universal digital channels, DI / DO
- 24 VDC, PNP
- Output current: 0.5 A
- Degree of protection IP20


Type designation	FDN20-4S-4XSG-E
Ident-No.	6611343
Ident-No (TUSA)	F0178
<b>Number of channels</b>	8
internal power consumption	<50 mA plus I/O supply
Voltage supply via DeviceNet	24 VDC
Supply voltage	24 VDC
Admissible range field supply	11...26 VDC
Power dissipation, typical	≤ 1.2 W
Voltage supply connection	Screw terminals or M12
<hr/>	
<b>Inputs</b>	
Number of channels	8
Input voltage	11...26 VDC
Low level signal voltage	< 4 V
High level signal voltage	8...24 V
Low level signal current	< 0.5 mA
High level signal current	1...3.4 mA
Max. input current	Total: 700 mA
<b>Number of channels</b>	4
Output voltage	18...26 VDC
Output current per channel	0.5 A (from DeviceNet™)
Switching frequency	≤ 100 Hz
Short-circuit protection	yes
<b>Fieldbus transmission rate</b>	125/250/500 kbps
Fieldbus address range	0...63
Fieldbus addressing	2 decimaly coded rotary switches
<b>Dimensions (W x L x H)</b>	55 x 62.5 x 23.5mm
Housing material	Nylon
Operating temperature	-40...70°C
Protection class	IP20
Approvals	CE, UL
UL conditions	pol. deg.2; surr. air temp. max. 40°C; cl.2 ps req.; tight. torque max. 0.56-0.79 Nm

**Compact I/O station for DeviceNet**  
**4 digital inputs, 4 universal digital channels**  
**FDN20-4S-4XSG-E**

**TURCK**  
 world


Industrial  
Automation

**Terminal assignment**

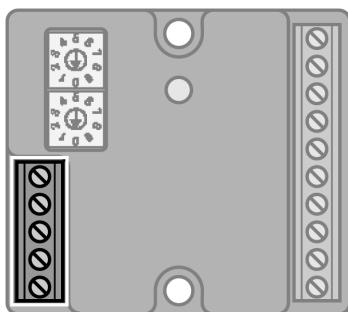


**DeviceNet™ and Power Supply**


Fieldbus cable (example):  
 CBC5-572-2M (ident no. 6606065) or  
 RKC5701-5M (ident no. 6931035)




1 = V +  
 2 = CAN<sub>H</sub>  
 3 = SHD  
 4 = CAN<sub>L</sub>  
 5 = V -

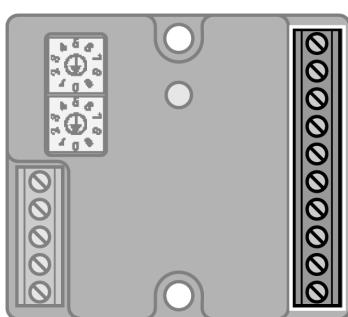

**I/O Channels**




1 = V -      6 = I<sub>4</sub>  
 2 = I/O 0      7 = I<sub>5</sub>  
 3 = I/O 1      8 = I<sub>6</sub>  
 4 = I/O 2      9 = I<sub>7</sub>  
 5 = I/O 3      10 = V +

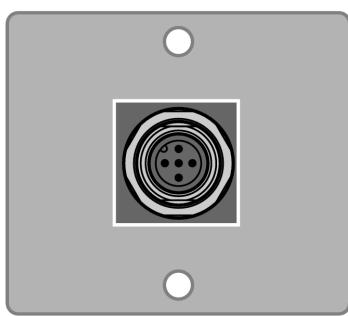

**DeviceNet™ and Power Supply**

Rear M12 connector for direct feeding through the cabinet wall.  
 Fieldbus cable (example):  
 RSC-RKC5701-2M (ident no. 6604833) or  
 RSC-WKC5701-1M (ident no. 6931039)



1 = Shield  
 2 = RD (V +)  
 3 = BK (V -)  
 4 = WH (CAN H)  
 5 = BU (CAN L)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for turck manufacturer:***

Other Similar products are found below :

[BI10-M30-AP6X-H1141](#) [BI2-G12-AZ33X-7M](#) [BS4151-0/13.5](#) [NI12U-G18-ADZ30X2-B1331](#) [NI12U-M18-AN4X](#) [BI1.5-G08K-AN6X](#) [BI5-G18-AZ3X](#) [BI5-G18-AZ3X-B1331-50MM](#) [VB20](#) [B 5143-0](#) [BI 2-EG08K-AP6X-V1131](#) [BMWS 8151-0/9](#) [BI30U-CK40-AP6X2-H1141](#) [NI12U-M18-AP6X-H1141](#) [NI4U-EG08-AN6X-H1341](#) [NI5-G12-AP6X-H1141](#) [NI14-G18-ADZ30X2](#) [BC10-QF5.5-RN6X2](#) [PKG 3M-4/S90](#) [B1N360V-Q20L60-2LU3-H1151](#) [FKFD 4.5](#) [RK40-2M](#) [BI5-G18-AP6X-B1441/S34](#) [RK 4T-10](#) [BI4-M12-AN6X-H1141](#) [NI3-EG08K-Y1-H1341](#) [BCF5-S18-RP4X/S90](#) [BI5-M18-Y0X-H1141](#) [NI35U-CK40-ADZ30X2-B3131](#) [W/BS4](#) [WK 4T-2](#) [IM1-22EX-T](#) [NI12U-MT18-AP4X-H1141](#) [BI1.5-EG08-AP6X-H1341](#) [BC 5-Q08-AP6X2-V1131](#) [BC5-S18-Y1X](#) [CT 2-A30/M](#) [C10-T13X/024VDC](#) [FDN20-4S-4XSG-E](#) [FKV-CC](#) [FSFD 8](#) [NI4U-EG08-RP6X-V1131](#) [CMBS 8141-0](#) [FEN20-16DXP](#) [BI10-M30-AN6X-H1141](#) [VB80-P7X9-8/CS12](#) [FKFD 8](#) [RI360P0-QR24M0-INCRX2-H1181](#) [PKW 3M-6](#) [NI8-M18E-VN4X](#) [WK 4.5T-2/S618](#)