

TIME RELAY, MULTI-FUNCTION 2 CHANGEOVER, 16 FUNCTIONS, 15 TIME SETTING RANGES AC/DC 24... 240 V, WITH LED, SCREW CONNECTION



General technical data:		
product brand name		SIRIUS
Product designation		timing relay
Mounting position		any
Product function non-volatile		No
Product component		
• Relay output		Yes
• semi-conductor output		No
Installation altitude at height above sea level maximum	m	2 000
Ambient temperature		
• during operation	°C	-25 ... +60
• during storage	°C	-40 ... +85
• during transport	°C	-40 ... +85
Relative humidity during operation	%	10 ... 95
EMC emitted interference acc. to IEC 61812-1		EN 61000-6-4(3)
EMI immunity acc. to IEC 61812-1		EN 61000-6-2
Conducted interference due to burst acc. to IEC 61000-4-4		2 kV network connection / 1 kV control connection

Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		2 kV
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV
Electrostatic discharge acc. to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling acc. to IEC 61000-4-3		10 V/m
Surge voltage resistance rated value	V	4 000
Power loss [W] total typical	W	2
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		K
Equipment marking acc. to DIN EN 81346-2		K
Category acc. to EN 954-1		none
Protection against electrical shock		finger-safe
Protection class IP		IP20
Mechanical service life (switching cycles) typical		10 000 000
Electrical endurance (switching cycles) at AC-15 at 230 V typical		100 000
Operating frequency with 3RT2 contactor maximum	1/h	5 000
Vibration resistance acc. to IEC 60068-2-6		10 ... 55 Hz / 0.35 mm
Shock resistance acc. to IEC 60068-2-27		11g / 15 ms
Relative repeat accuracy	%	1
Recovery time	ms	150
Minimum ON period	ms	35
Degree of pollution		3
Insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	V	300
Relative setting accuracy relating to full-scale value	%	5

Switching Function:

Switching function

• ON-delay	Yes
• ON-delay/instantaneous contact	Yes
• passing make contact	Yes
• passing make contact/instantaneous contact	Yes
• OFF delay	No
• flashing asymmetrically starting with interval	No
• flashing asymmetrically starting with pulse	No
• flashing symmetrically starting with pulse	No
• flashing symmetrically starting with pulse/instantaneous	No
• flashing symmetrically starting with interval	Yes
• flashing symmetrically starting with interval/instantaneous	Yes
• star-delta circuit	Yes

<ul style="list-style-type: none"> • star-delta circuit with delay time 		No
Switching function with control signal		
<ul style="list-style-type: none"> • additive ON delay 		Yes
<ul style="list-style-type: none"> • passing break contact 		Yes
<ul style="list-style-type: none"> • OFF delay 		Yes
<ul style="list-style-type: none"> • pulse-shaping 		Yes
<ul style="list-style-type: none"> • OFF delay/instantaneous 		Yes
<ul style="list-style-type: none"> • ON-delay/OFF-delay/instantaneous 		Yes
<ul style="list-style-type: none"> • passing break contact/instantaneous 		Yes
<ul style="list-style-type: none"> • additive ON delay/instantaneous 		Yes
<ul style="list-style-type: none"> • ON-delay/OFF-delay 		Yes
<ul style="list-style-type: none"> • passing make contact 		No
<ul style="list-style-type: none"> • passing make contact/instantaneous contact 		No
<ul style="list-style-type: none"> • pulse delayed 		No
<ul style="list-style-type: none"> • pulse delayed/instantaneous 		No
<ul style="list-style-type: none"> • pulse-shaping/instantaneous 		Yes
Switching function of interval relay with control signal		
<ul style="list-style-type: none"> • retrotriggerable with deactivated control signal/instantaneous contact 		No
<ul style="list-style-type: none"> • retrotriggerable with activated control signal 		No
<ul style="list-style-type: none"> • retrotriggerable with activated control signal/instantaneous contact 		No
<ul style="list-style-type: none"> • retriggerable with deactivated control signal 		No
Design of the control terminal non-floating		Yes

Control circuit/ Control:		
Adjustable time	s	0.05 ... 360 000
Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency 1	Hz	50 ... 60
Control supply voltage 1		
<ul style="list-style-type: none"> • at AC <ul style="list-style-type: none"> — at 50 Hz — at 60 Hz • at DC 	V	24 ... 240
	V	24 ... 240
	V	24 ... 240
Operating range factor control supply voltage rated value		
<ul style="list-style-type: none"> • at AC <ul style="list-style-type: none"> — at 50 Hz — at 60 Hz • at DC 		0.8 ... 1.1
		0.8 ... 1.1
		0.7 ... 1.1

Auxiliary circuit:		
Contact reliability of auxiliary contacts		one incorrect switching operation of 100 million switching operations (17 V, 5 mA)

Material of switching contacts		AgSnO2
Operating current of auxiliary contacts		
<ul style="list-style-type: none"> • at AC-15 <ul style="list-style-type: none"> — at 24 V — at 250 V • at DC-13 <ul style="list-style-type: none"> — at 24 V — at 125 V — at 250 V 	A A A A A	3 3 1 0.2 0.1
Design of the fuse link for short-circuit protection of the auxiliary switch required		fuse gL/gG: 4 A
Thermal current	A	5
Number of NC contacts		
<ul style="list-style-type: none"> • delayed switching • instantaneous contact 		0 0
Number of NO contacts		
<ul style="list-style-type: none"> • delayed switching • instantaneous contact 		0 0
Number of CO contacts		
<ul style="list-style-type: none"> • delayed switching • instantaneous contact 		2 0

Installation/ mounting/ dimensions:		
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	22.5
Height	mm	102
Depth	mm	91
Required spacing with side-by-side mounting		
<ul style="list-style-type: none"> • upwards • forwards • at the side • Backwards • downwards 	mm mm mm mm mm	0 0 0 0 0
Required spacing for grounded parts		
<ul style="list-style-type: none"> • Backwards • at the side • upwards • forwards • downwards 	mm mm mm mm mm	0 0 0 0 0
Required spacing for live parts		
<ul style="list-style-type: none"> • downwards • Backwards 	mm mm	0 0






- at the side
- forwards
- upwards

mm	0
mm	0
mm	0







Connections/ Terminals:

Type of electrical connection for auxiliary and control current circuit		screw-type terminals
Type of connectable conductor cross-sections		1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
<ul style="list-style-type: none"> • solid • finely stranded <ul style="list-style-type: none"> — with core end processing • at AWG conductors <ul style="list-style-type: none"> — stranded — solid 		1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
		2x (20 ... 14)
		2x (20 ... 14)
Tightening torque	N·m	0.8 ... 1.2


Certificates/ approvals:

General Product Approval			Declaration of Conformity	Test Certificates
				
CCC	CSA		UL	EG-Konf.
				spezielle Prüfbescheinigung n

Shipping Approval

					
BUREAU VERITAS	DNV	GL	LRS	PRS	RINA

Shipping Approval	other
-------------------	-------


	Bestätigungen	sonstig	Umweltbestätigung
RMRS			

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)
<http://www.siemens.com/industrymall>

Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP15051BW30>

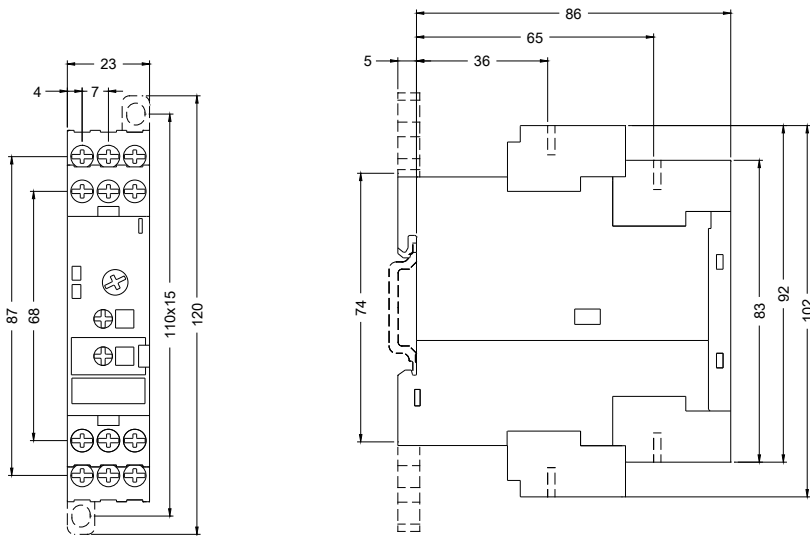

last modified:

08.12.2015

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [siemens](#) manufacturer:

Other Similar products are found below :

[5SJ4101-7HG40](#) [5SL6225-7](#) [5ST2144](#) [5ST2167](#) [5SX2125-7](#) [5SX2132-7](#) [5SX2320-7](#) [5SX2340-7](#) [5SX9200](#) [5SY4106-8](#) [5SY6220-7](#)
[6EP1321-5BA00](#) [6EP3333-8SB00-0AY0](#) [6ES5451-7LA11](#) [6ES7322-1BF01-0AA0](#) [D11CEU1](#) [PD63F160](#) [FXD63B175](#) [8WA1011-2SF25](#)
[8WA1721](#) [8WA1815](#) [8WA8848-0AC](#) [8WA8-848-0AM](#) [8WA8-848-0AN](#) [8WA8-848-0AT](#) [8WA8-848-0AX](#) [8WA8-848-0BD](#) [8WA8-848-](#)
[0BF](#) [8WA8-848-0BL](#) [8WA8-848-0BP](#) [8WA8-848-0BQ](#) [14DP32AC81](#) [ED21B100](#) [B32523-.47@400V-J](#) [B65541-T25-A48](#) [B65549-E4-X23](#)
[B65812-B1512-T1](#) [B66317-G0000-X127](#) [B66337-G0500-X127](#) [B66417-G-X167](#) [B82724-J](#) [8WA1201](#) [8WA1854](#) [8WA1870](#) [8WA8-848-](#)
[0AK](#) [8WA8-848-0AV](#) [8WA8-848-0BC](#) [8WA8-848-0BG](#) [8WA8-848-0BJ](#) [8WA8-848-0BK](#)