


# Miniature Incandescent Indicators

FOR MOUNTING IN 1/16" CLEARANCE HOLE  
FOR 2 TO 120V OPERATION



T-3 1/4  
MINIATURE  
BAYONET BASE

See lamp ratings  
on page K.

Recognized under the component  
program of Underwriters'  
Laboratories Inc.

75W., 125V.



How to designate the three digit part number suffix (-XXX)

| FINISH              | RESISTOR | HARDWARE   |
|---------------------|----------|--|
| 1 - White nickel    | 0 - None | 1 - Brass  |
| 2 - Black nickel    |          | 3 - Water-tight, on<br>the face of the<br>panel. |
| 3 - Polished chrome |          |  |
| 4 - Satin chrome    |          |  |


NOTE: The part numbers given in this catalog indicate **standard** indicator lights. The table above provides the standard and optional designations for **Finish** and **Hardware** where appropriate. Example: 95-1310-0931-203 (black nickel finish with water-tight construction).

Part numbers listed in this catalog designate products with **RED** lens. For ordering lens colors other than red, consult chart on page 2D.

## MATERIALS AND FINISHES

- **Mounting Bushing and Lens Holder:** Standard—Brass, polished chrome. Optional—White nickel, black nickel or satin chrome finish.
- **Mounting Nut:** Brass, white nickel finish.
- **Internal-tooth Lockwasher:** Phosphor bronze, white nickel finish.
- **Terminals: Solder** —Brass, hot tinned with elongated slot.  
**Screw**—Brass, white nickel finish.  
**Quick Connect**—Brass, tinned. Mate with standard female receptacles.

These assemblies also accommodate T-3 bulbs with miniature bayonet base, incandescent—in voltages from 6–120V. When lamps rated 2 watts or over are used, lens caps of high temperature plastic are required. Contact the factory for additional data and correct catalog number designations.

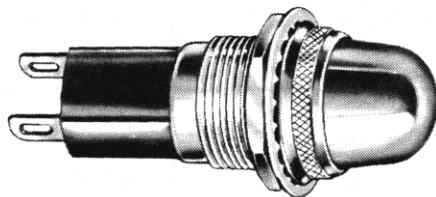

26-0410-1111-301  
Screw-in lens cap

26 SERIES

BASE PART NUMBERS

## WITH SCREW-IN LENS CAPS

|                              | solder terminals                      | screw terminals  | quick connect terminals |
|------------------------------|---------------------------------------|------------------|-------------------------|
|                              |                                       |                  |                         |
|                              | 26-0410-11-301                        | 26-1310-11-301   | 26-5710-11-301          |
| <b>CAP PART NUMBERS</b>      | <b>COMPLETE ASSEMBLY PART NUMBERS</b> |                  |                         |
| <p><b>STOVEPIPE</b></p>      |                                       |                  |                         |
| 26-1131-300 transparent      | 26-0410-1131-301                      | 26-1310-1131-301 | 26-5710-1131-301        |
| 26-1191-300 internal fluting | 26-0410-1191-301                      | 26-1310-1191-301 | 26-5710-1191-301        |
| 26-1111-300 back frosted     | 26-0410-1111-301                      | 26-1310-1111-301 | 26-5710-1111-301        |

These assemblies should be specified when lamps rated over 2 watts are used.

Part numbers shown in gray are normally in inventory at your Dialight Distributor.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Lamp Holders & Accessories](#) category:*

*Click to view products by [Dialight](#) manufacturer:*

Other Similar products are found below :

[M81969/17-09](#) [D38999/20ZF11SA](#) [D38999/20ZF11SA-LC](#) [D38999/20ZJ35SA](#) [D38999/24ZF32BN](#) [D38999/24ZF35SN](#) [D38999/24ZF35SN-LC](#) [D38999/24ZG35SN-LC](#) [8101000002201](#) [811730-1](#) [983-0SE14-07S8](#) [DAK83S-20](#) [DTS20Z9-35SA](#) [MS18236-1YN](#) [DTS24Z21-11SN](#) [DTS24Z21-16AN](#) [DTS24Z21-16PN](#) [DTS24Z21-16PN-LC](#) [MS25041-8-327](#) [BACC63CN1404S8A](#) [BACC63CN1407S8A](#) [EN2997S01407F8](#) [EN2997SE01407F8](#) [169-0412-11-201](#) [PBMBN](#) [251-7538-15-504](#) [2802](#) [2802](#) [294502](#) [983-0S14-04S8](#) [983-0S14-07S8](#) [983-0S14-07S8-L](#) [983-0SE14-04S8](#) [162-8430-0932-502-327](#) [183-9730-14-602](#) [21-16](#) [251-8738-15-504](#) [259-1930-29-801](#) [3062](#) [350-0410-01-203](#) [367-8430-09-802](#) [367-8430-09-810](#) [371-8738-14-504](#) [D38999/20ZA35SA](#) [D38999/20ZG35SA](#) [D38999/24ZC35SA](#) [D38999/24ZF11SN-LC](#) [D38999/24ZF32SN-LC](#) [D38999/24ZG39SN-LC](#) [D38999/24ZG41PN-LC](#)