



STPS3045CT/CG/CR/CP/CPI/CW

POWER SCHOTTKY RECTIFIER

MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	2 x 15 A
V_{RRM}	45 V
$T_j(\text{max})$	175 °C
V_F	0.57 V


FEATURES AND BENEFITS

- VERY SMALL CONDUCTION LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- EXTREMELY FAST SWITCHING
- LOW THERMAL RESISTANCE
- INSULATED PACKAGE: TOP-3I
Insulating voltage = 2500V RMS
Capacitance = 12pF

DESCRIPTION

Dual center tap Schottky rectifier suited for SwitchMode Power Supply and high frequency DC to DC converters.

Packaged either in TO-220AB, D²PAK, I²PAK, TO-247, SOT93 or TOP-3I, this device is especially intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

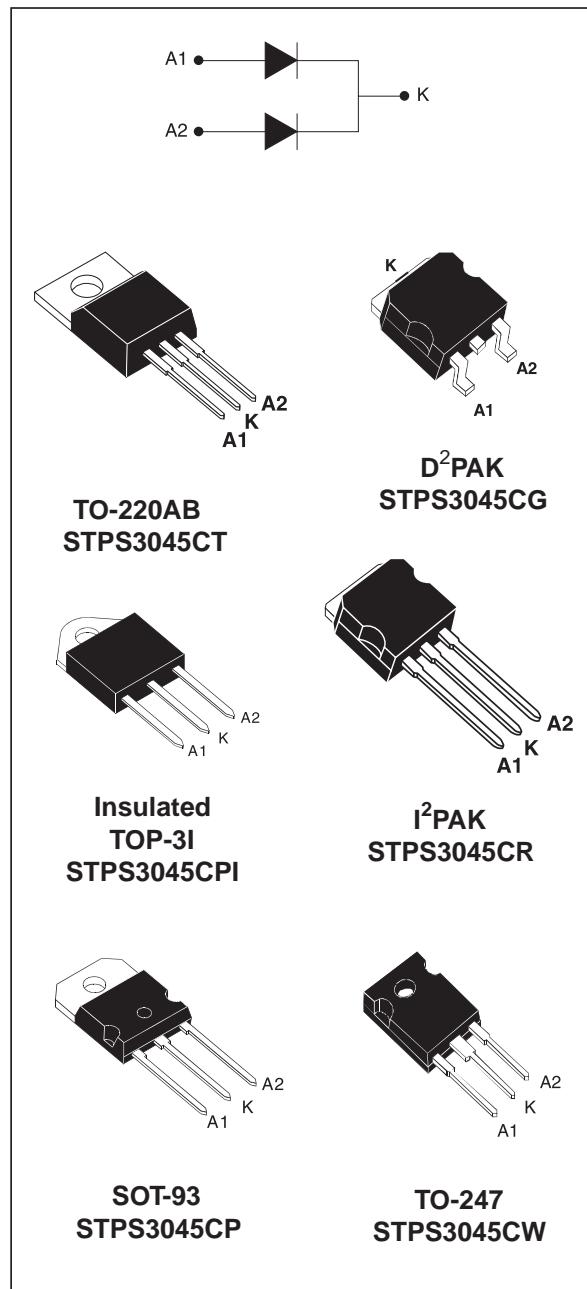

STPS3045CT/CG/CR/CP/CPI/CW

ABSOLUTE RATINGS (limiting values, per diode)

Symbol	Parameter				Value	Unit			
V _{RRM}	Repetitive peak reverse voltage				45	V			
I _{F(RMS)}	RMS forward current				30	A			
I _{F(AV)}	Average forward current $\delta = 0.5$	TO-220AB D ² PAK / I ² PAK SOT-93 TO-247	T _c = 155°C	Per diode Per device	15	A			
		TOP-3I	T _c = 150°C		30				
I _{FSM}	Surge non repetitive forward current		tp = 10 ms sinusoidal		220	A			
I _{RRM}	Repetitive peak reverse current		tp = 2 µs square F = 1kHz		1	A			
I _{RSR}	Non repetitive peak reverse current		tp = 100 µs square		3	A			
T _{Stg}	Storage temperature range				-65 to +175	°C			
T _j	Maximum operating junction temperature *				175	°C			
dV/dt	Critical rate of rise of reverse voltage				10000	V/µs			

* : $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th}(j-a)}$ thermal runaway condition for a diode on its own heatsink

THERMAL RESISTANCES

Symbol	Parameter			Value	Unit
R _{th} (j-c)	Junction to case	TO-220AB D ² PAK / I ² PAK	Per diode Total	1.60 0.85	°C/W
		SOT-93 TO-247	Per diode Total	1.5 0.8	
		TOP-3I	Per diode Total	2.2 1.6	
R _{th} (c)		TO-220AB D ² PAK / I ² PAK SOT-93 TO-247	Coupling	0.10	
		TOP-3I	Coupling	1.0	

When the diodes 1 and 2 are used simultaneously:

$$\Delta T_j \text{ (diode 1)} = P \text{ (diode1)} \times R_{th(j-c)} \text{ (per diode)} + P \text{ (diode 2)} \times R_{th(c)}$$

STATIC ELECTRICAL CHARACTERISTICS (Per diode)

Symbol	Parameter	Tests Conditions		Min.	Typ.	Max.	Unit
I_R *	Reverse leakage current	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			200	μA
		$T_j = 125^\circ\text{C}$			11	40	mA
V_F *	Forward voltage drop	$T_j = 125^\circ\text{C}$	$I_F = 15 \text{ A}$		0.5	0.57	V
		$T_j = 25^\circ\text{C}$	$I_F = 30 \text{ A}$			0.84	
		$T_j = 125^\circ\text{C}$	$I_F = 30 \text{ A}$		0.65	0.72	

Pulse test : * $t_p = 380 \mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation :
 $P = 0.42 \times I_{F(\text{AV})} + 0.01 I_{F(\text{RMS})}^2$

Fig. 1: Average forward power dissipation versus average forward current (per diode).


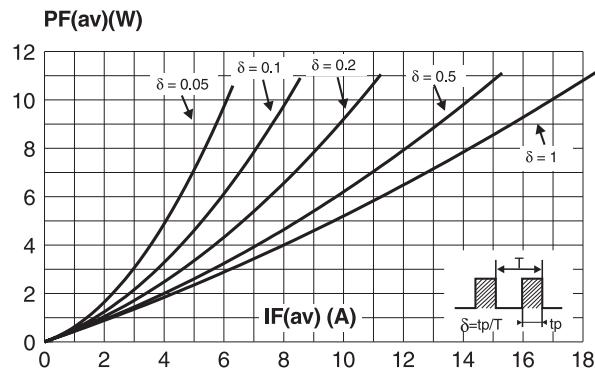


Fig. 2: Average current versus ambient temperature ($\delta = 0.5$, per diode).

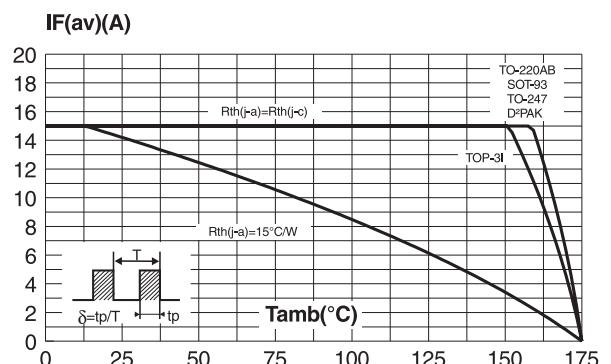

STPS3045CT/CG/CR/CP/CPI/CW

Fig. 3-1: Non repetitive surge peak forward current versus overload duration (maximum values, per diode) (TO-220AB, D²PAK, I²PAK, SOT-93 and TO-247).

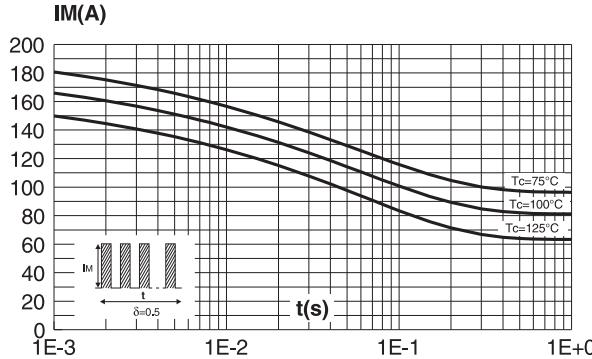


Fig. 4: Relative variation of thermal transient impedance junction to case versus pulse duration.

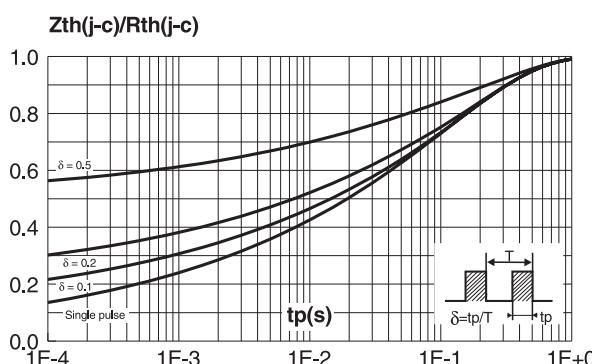


Fig. 6: Junction capacitance versus reverse voltage applied (typical values, per diode).

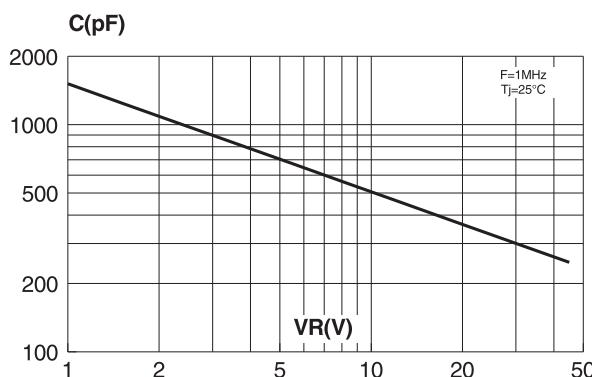


Fig. 3-2: Non repetitive surge peak forward current versus overload duration (maximum values, per diode) (TOP-3I).

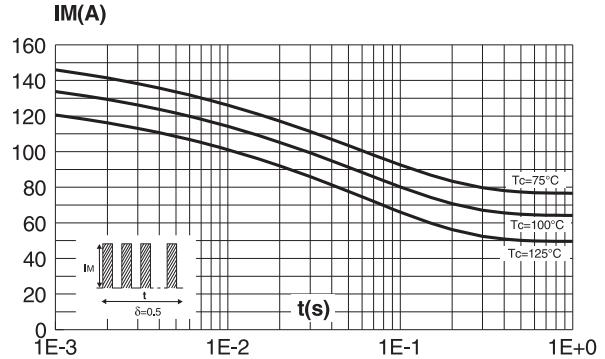


Fig. 5: Reverse leakage current versus reverse voltage applied (typical values, per diode).



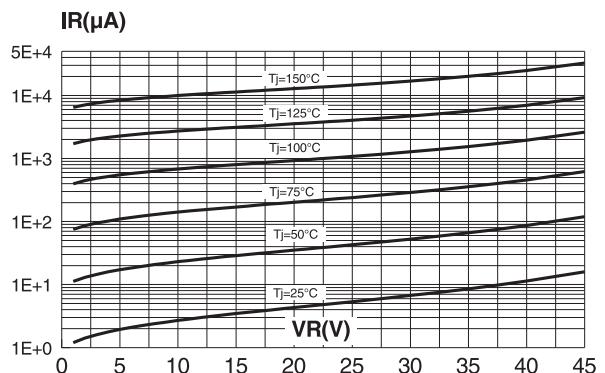


Fig. 7: Forward voltage drop versus forward current (maximum values, per diode).

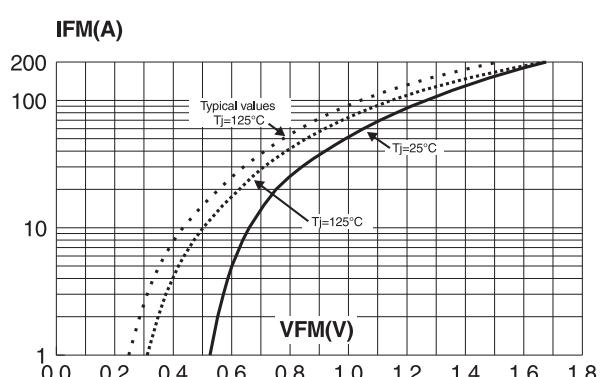


PACKAGE MECHANICAL DATA
TO-220AB

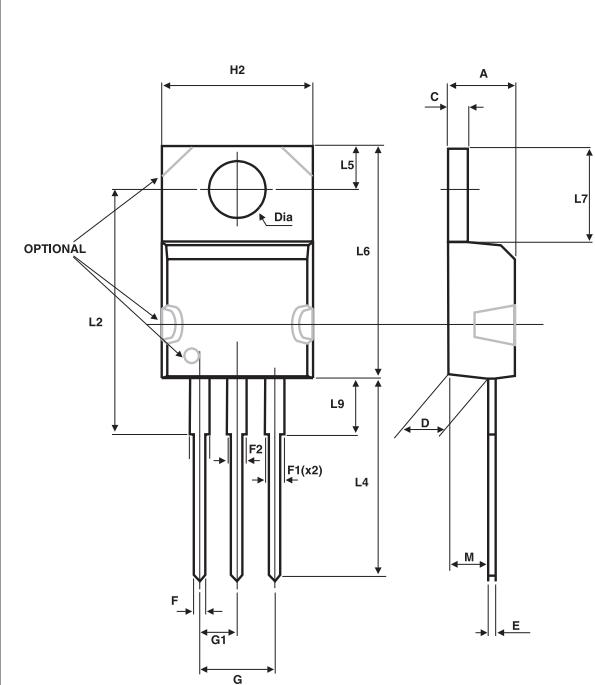

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.30	4.60	0.169	0.181
C	1.22	1.32	0.048	0.052
D	2.40	2.72	0.094	0.107
E	0.33	0.70	0.013	0.028
F	0.61	0.93	0.024	0.037
F1	1.14	1.70	0.045	0.067
F2	1.14	1.70	0.045	0.067
G	4.95	5.15	0.195	0.202
G1	2.40	2.70	0.094	0.106
H2	10.00	10.40	0.394	0.409
L2	16.00 Typ.		0.630 Typ.	
L4	13.00	14.00	0.512	0.551
L5	2.65	2.95	0.104	0.116
L6	14.80	15.75	0.583	0.620
L7	6.20	6.60	0.244	0.260
L9	3.40	3.94	0.134	0.155
M	2.60 Typ.		0.102 Typ.	
Dia.	3.75	3.89	0.148	0.153


PACKAGE MECHANICAL DATA
I²PAK

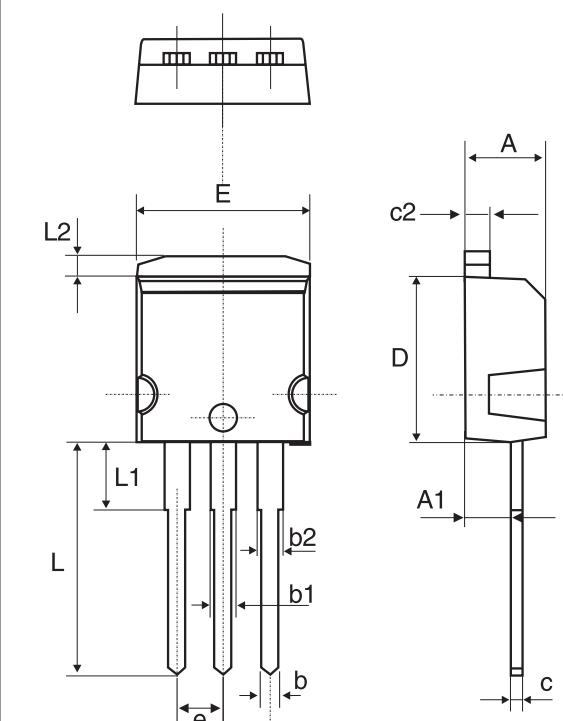

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.40	4.60	0.173	0.181
A1	2.49	2.69	0.098	0.106
b	0.70	0.93	0.028	0.037
b1	1.14	1.17	0.044	0.046
b2	1.14	1.17	0.044	0.046
c	0.45	0.60	0.018	0.024
c2	1.23	1.36	0.048	0.054
D	8.95	9.35	0.352	0.368
e	2.40	2.70	0.094	0.106
E	10.0	10.4	0.394	0.409
L	13.1	13.6	0.516	0.535
L1	3.48	3.78	0.137	0.149
L2	1.27	1.40	0.050	0.055

STPS3045CT/CG/CR/CP/CPI/CW


PACKAGE MECHANICAL DATA D²PAK

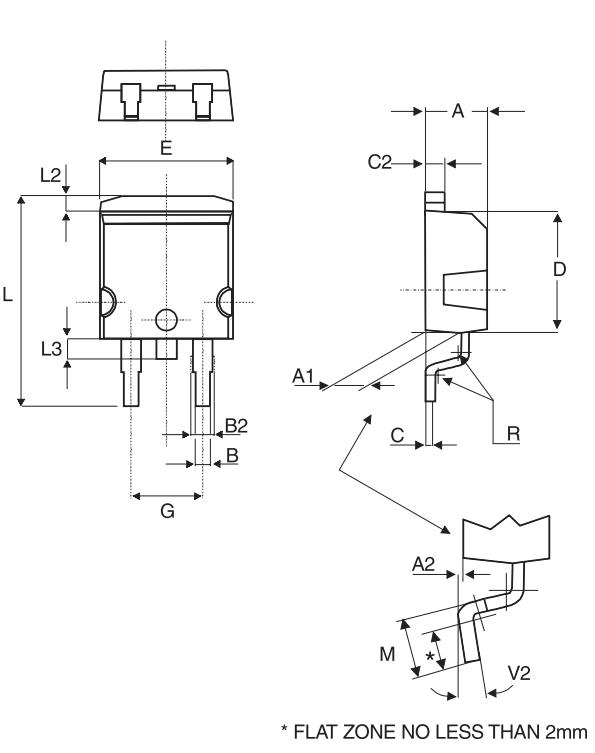

* FLAT ZONE NO LESS THAN 2mm

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.40	4.60	0.173	0.181
A1	2.49	2.69	0.098	0.106
A2	0.03	0.23	0.001	0.009
B	0.70	0.93	0.027	0.037
B2	1.14	1.70	0.045	0.067
C	0.45	0.60	0.017	0.024
C2	1.23	1.36	0.048	0.054
D	8.95	9.35	0.352	0.368
E	10.00	10.40	0.393	0.409
G	4.88	5.28	0.192	0.208
L	15.00	15.85	0.590	0.624
L2	1.27	1.40	0.050	0.055
L3	1.40	1.75	0.055	0.069
M	2.40	3.20	0.094	0.126
R	0.40 typ.		0.016 typ.	
V2	0°	8°	0°	8°

FOOTPRINT DIMENSIONS (in millimeters)

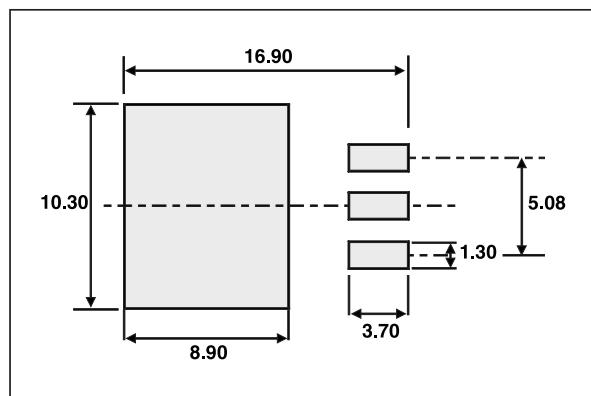


PACKAGE MECHANICAL DATA
TO-247

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.85		5.15	0.191		0.203
D	2.20		2.60	0.086		0.102
E	0.40		0.80	0.015		0.031
F	1.00		1.40	0.039		0.055
F1		3.00			0.118	
F2		2.00			0.078	
F3	2.00		2.40	0.078		0.094
F4	3.00		3.40	0.118		0.133
G		10.90			0.429	
H	15.45		15.75	0.608		0.620
L	19.85		20.15	0.781		0.793
L1	3.70		4.30	0.145		0.169
L2		18.50			0.728	
L3	14.20		14.80	0.559		0.582
L4		34.60			1.362	
L5		5.50			0.216	
M	2.00		3.00	0.078		0.118
V		5°			5°	
V2		60°			60°	
Dia.	3.55		3.65	0.139		0.143

The technical drawing illustrates the physical dimensions of the TO-247 package. Key dimensions include:
- Total height (L) from 19.85 mm to 20.15 mm.
- Lead spacing (H) at 15.45 mm.
- Lead thickness (A) at 4.85 mm.
- Lead diameter (D) at 3.55 mm.
- Lead pitch (F1-F5) at 3.00 mm.
- Lead width (E) at 0.40 mm.
- Lead height (M) at 2.00 mm.
- Lead angle (V) at 5°.
- Lead taper angle (V2) at 60°.
- Lead diameter (Dia.) at 3.65 mm.
- Lead thickness (F(x3)) at 1.00 mm.
- Lead width (G) at 0.40 mm.
- Lead height (F4) at 3.00 mm.
- Lead length (F3) at 2.00 mm.
- Lead length (F2) at 2.00 mm.
- Lead length (F1) at 3.00 mm.
- Lead width (F5) at 3.00 mm.
- Lead height (F4) at 3.00 mm.
- Lead width (F3) at 2.00 mm.
- Lead height (F2) at 2.00 mm.
- Lead width (F1) at 3.00 mm.


STPS3045CT/CG/CR/CP/CPI/CW

PACKAGE MECHANICAL DATA SOT-93

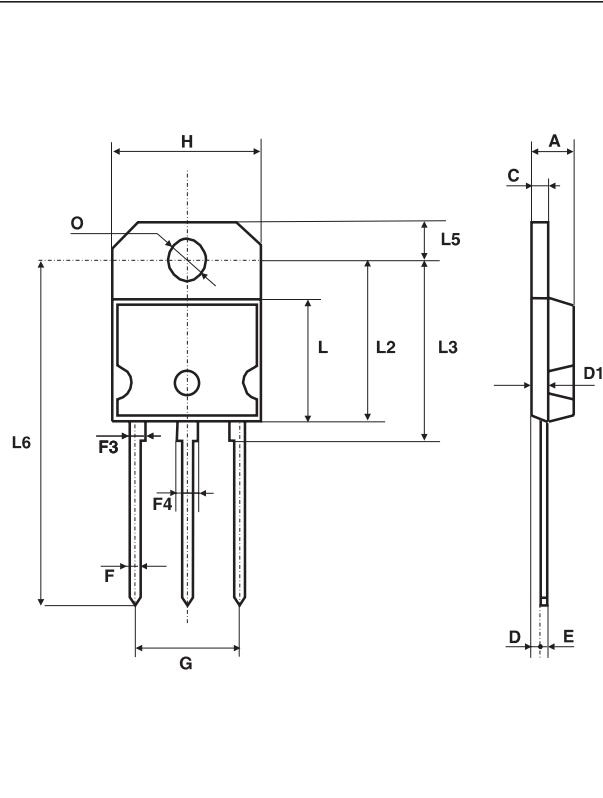

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.70		4.90	0.185		0.193
C	1.90		2.10	0.075		0.083
D		2.50			0.098	
D1		2.00			0.078	
E	0.50		0.78	0.020		0.031
F	1.10		1.30	0.043		0.051
F3		1.75			0.069	
F4		2.10			0.083	
G	10.80		11.10	0.425		0.437
H	14.70		15.20	0.279		0.598
L			12.20			0.480
L2			16.20			0.638
L3		18.0			0.709	
L5	3.95		4.15	0.156		0.163
L6		31.00			1.220	
O	4.00		4.10	0.157		0.161

PACKAGE MECHANICAL DATA TOP-3I (isolated)

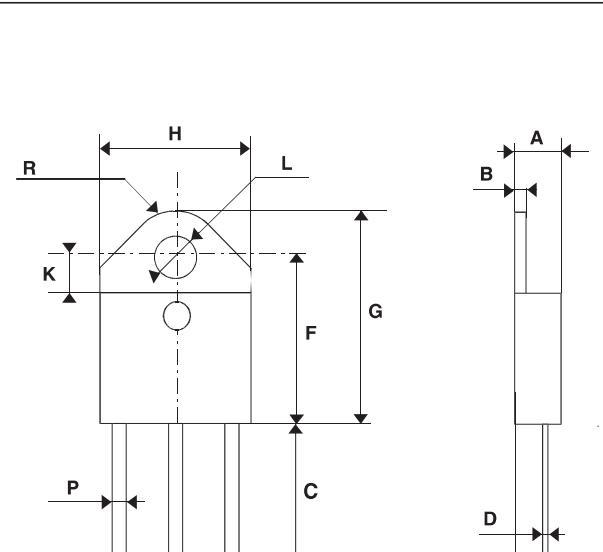

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.4		4.6	0.173		0.181
B	1.45		1.55	0.057		0.061
C	14.35		15.60	0.565		0.614
D	0.5		0.7	0.020		0.028
E	2.7		2.9	0.106		0.114
F	15.8		16.5	0.622		0.650
G	20.4		21.1	0.815		0.831
H	15.1		15.5	0.594		0.610
J	5.4		5.65	0.213		0.222
K	3.4		3.65	0.134		0.144
L	4.08		4.17	0.161		0.164
P	1.20		1.40	0.047		0.055
R		4.60			0.181	

Type	Marking	Package	Weight	Base qty	Delivery mode
STPS3045CT	STPS3045CT	TO-220AB	2.23 g.	50	Tube
STPS3045CG	STPS3045CG	D ² PAK	1.48 g.	50	Tube
STPS3045CG-TR	STPS3045CG	D ² PAK	1.48 g.	1000	Tape & reel
STPS3045CR	STPS3045CR	I ² PAK	1.48 g	50	Tube
STPS3045CP	STPS3045CP	SOT-93	3.97 g.	30	Tube
STPS3045CPI	STPS3045CPI	TOP-3I	4.46 g.	120	Bulk
STPS3045CW	STPS3045CW	TO-247	4.46 g.	30	Tube

- Cooling method: by conduction (C)
- Recommended torque value (SOT-93, TOP-3I, TO-247): 0.8 N.m.
- Recommended torque value (TO-220AB): 0.55 N.m.
- Maximum torque value (SOT-93, TOP-3I, TO-247): 1.0 N.m.
- Maximum torque value (TO-220AB): 0.7 N.m.
- Epoxy meets UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany

Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore

Spain - Sweden - Switzerland - United Kingdom - United States.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by STMicroelectronics manufacturer:

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)