
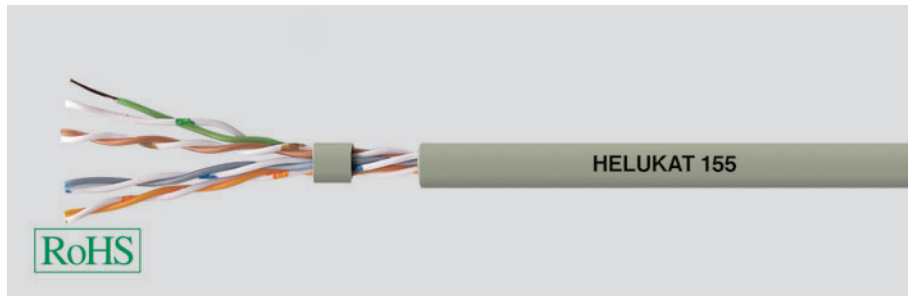


LAN Cable

Category 5e

HELUKAT® 155

UTP




Cable structure

Inner conductor diameter: 0,51 mm
 Conductor material: Copper, bare
 Core insulation: PE
 Core colours: whbu/bu, whog/og, whgn/gn, whbn/bn
 Shielding 1: -
 Screen over stranding element: -
 Screen 1 over stranding: -
 Screen 2 over stranding: -
 Outer sheath material: PVC
 Outer diameter: approx. 4,9 mm
 Outer sheath colour: Grey

UTP 4x2xAWG 24/1 PVC

Electrical data

Characteristic impedance: 100 Ohm ± 15 ohm at 1 to 100 MHz
 Loop resistance: 190 Ohm/km max.
 Mutual capacitance: 50 nF/km nom.
 Rel. propagation velocity: 66 %

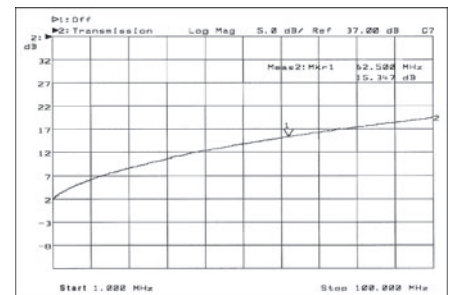


Typical values

Frequency (MHz)	10	16	62,5	100	155
Attenuation (dB/100m)	6,3	8,0	16,5	21,3	26,8
Next (db)	50,3	47,3	38,4	35,3	33,0
ACR (db)	44,0	39,3	21,9	14,0	6,2

Technical data

Weight: approx. 26 kg/km
 Min. bending radius for laying: 40 mm
 Operating temperature range min.: -20°C
 Operating temperature range max.: +60°C
 Caloric load, approx. value: 0,40 MJ/m
 Copper weight: 17,00 kg/km

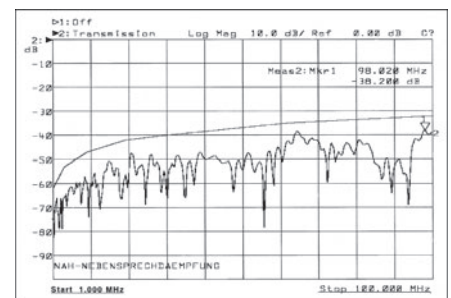

Norms

Acc. to ISO/IEC 11801, Acc. to EN 50173, Acc. to EIA/TIA 568-A, Category 5e

Application

HELUKAT®155 data cables are used in the tertiary, but also in the secondary level of a network. They are characterized by large performance reserves and outstanding performance. They can be used to implement services such as Fast Ethernet, Ethernet, ATM155, FDDI, token ring 4/16 Mbit/s, or ISDN absolutely trouble-free. Likewise, the mechanical characteristics are perfectly suited for the application in tight cable channels and platforms due to their optimized construction.

Part no.

80053, UTP 4x2xAWG24/1 PVC (U/UTP)

Dimensions and specifications may be changed without prior notice.

R

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Cables / Networking Cables](#) category:

Click to view products by [Helukabel](#) manufacturer:

Other Similar products are found below :

[0152660053](#) [603020002](#) [73-7797-25](#) [73-8890-10](#) [73-8890-14](#) [73-8891-14](#) [73-8891-25](#) [73-8892-50](#) [73-8894-10](#) [73-8894-3](#) [73-8895-14](#) [73-8896-7](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [9QA0-111-12-3.00](#) [1200650742](#) [1200700174](#) [1200860368](#) [1200650013](#) [1201080008](#) [1-21919-1](#) [1300500373](#) [1300101844](#) [1300101845](#) [130050-0004](#) [1300500014](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [MT14-187L](#) [17-103530](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC30BLY](#) [NK5EPC30VLY](#) [NK5EPC30YLY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [NK6PC30BUY](#) [NK6PC30GRY](#) [NK6PC30RDY](#) [NK6PC30Y](#) [NK6PC30YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#)