



### OPTICALLY COUPLED BILATERAL SWITCH NON-ZERO CROSSING TRIAC



#### APPROVALS

- UL recognised, File No. E91231 under Package System 'KK'

#### 'X' SPECIFICATION APPROVALS

- VDE 0884 in 3 available lead forms : -
  - STD
  - G form
  - SMD approved to CECC 00802

#### DESCRIPTION



The MOC302\_ series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode coupled with a light activated silicon bilateral switch performing the functions of a triac mounted in a standard 6 pin dual-in-line package.

#### FEATURE

- Options :-
  - 10mm lead spread - add G after part no.
  - Surface mount - add SM after part no.
  - Tape&reel - add SMT&R after part no.
- High Isolation Voltage ( $5.3\text{kV}_{\text{RMS}}, 7.5\text{kV}_{\text{PK}}$ )
- 400V Peak Blocking Voltage
- All electrical parameters 100% tested
- Custom electrical selections available

#### APPLICATIONS

- CRTs
- Power Triac Driver
- Motors
- Consumer appliances
- Printers

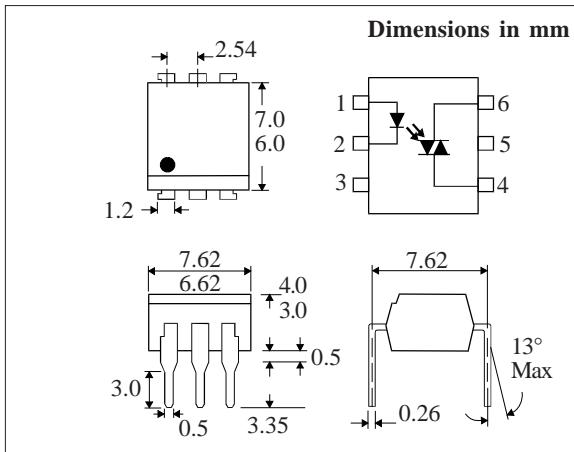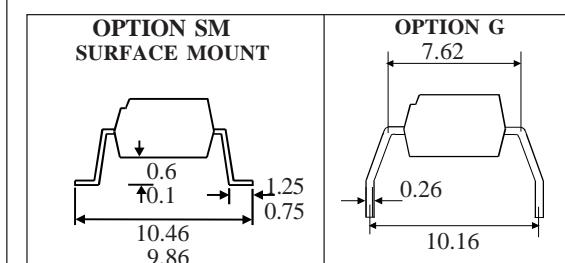

#### ABSOLUTE MAXIMUM RATINGS (25 °C unless otherwise noted)

Storage Temperature	$-55^{\circ}\text{C} \text{--} +150^{\circ}\text{C}$
Operating Temperature	$-40^{\circ}\text{C} \text{--} +100^{\circ}\text{C}$
Lead Soldering Temperature	$260^{\circ}\text{C}$ (1.6mm from case for 10 seconds)

#### INPUT DIODE

Forward Current	50mA
Reverse Voltage	6V
Power Dissipation	70mW (derate linearly 0.93mW/ $^{\circ}\text{C}$ above 25 $^{\circ}\text{C}$ )

#### OUTPUT PHOTO TRIAC

Off-State Output Terminal Voltage	400V
Forward Current (Peak)	1A
Power Dissipation	300mW (derate linearly 4.0mW/ $^{\circ}\text{C}$ above 25 $^{\circ}\text{C}$ )

#### POWER DISSIPATION

Total Power Dissipation	330mW
	(derate linearly 4.4mW/ $^{\circ}\text{C}$ above 25 $^{\circ}\text{C}$ )

#### ISOCOM COMPONENTS 2004 LTD

Unit 25B, Park View Road West,  
 Park View Industrial Estate, Brenda Road  
 Hartlepool, Cleveland, TS25 1UD  
 Tel: (01429) 863609 Fax: (01429) 863581

**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**


PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ ) Reverse Current ( $I_R$ )		1.2 100	1.5 $\mu\text{A}$	V $\mu\text{A}$	$I_F = 10\text{mA}$ $V_R = 6\text{V}$
Output	Peak Off-state Current ( $I_{DRM}$ ) Peak Blocking Voltage ( $V_{DRM}$ ) On-state Voltage ( $V_{TM}$ ) Critical rate of rise of off-state Voltage ( dv/dt ) ( note 1 ) Critical rate of rise of commutating Voltage ( dv/dt ) ( note 1 )	400	1.5	100 3.0	nA V V	$V_{DRM} = 400\text{V}$ ( note 1 ) $I_{DRM} = 100\text{nA}$ $I_{TM} = 100\text{mA}$ ( peak )
Coupled	Input Current to Trigger ( $I_{FT}$ )(note 2 ) MOC3020 MOC3021 MOC3022 MOC3023  Holding Current , either direction ( $I_H$ )  Input to Output Isolation Voltage $V_{ISO}$			30 15 10 5	mA mA mA mA	$V_D = 3\text{V}$ ( note 2 )
		100			$\mu\text{A}$	
		5300 7500			$V_{RMS}$ $V_{PK}$	See note 3 See note 3

Note 1. Test voltage must be applied within dv/dt rating.


Note 2. Guaranteed to trigger at an  $I_F$  value less than or equal to max.  $I_{FT}$ , recommended  $I_F$  lies between Rated  $I_{FT}$  and absolute max.  $I_{FT}$ .

Note 3. Measured with input leads shorted together and output leads shorted together.


**FIGURE 1**

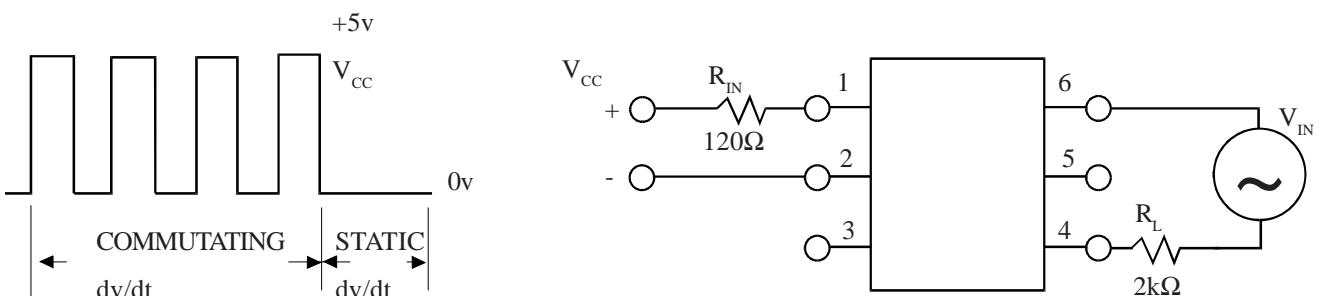


**RMS On-state Current vs. Ambient Temperature**

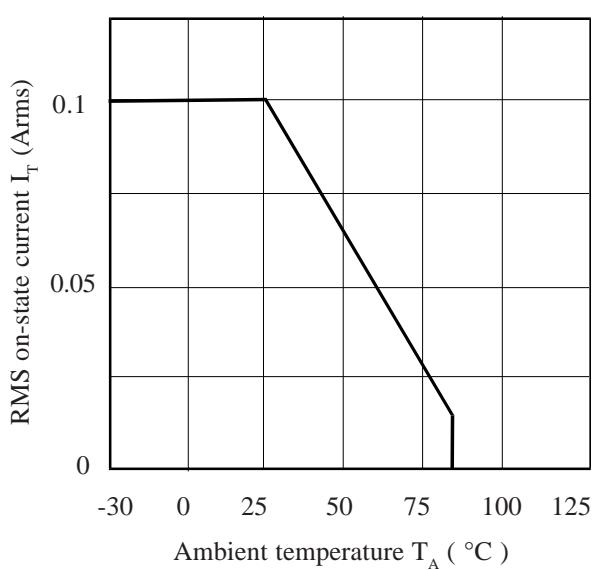


**Forward Current vs. Ambient Temperature**

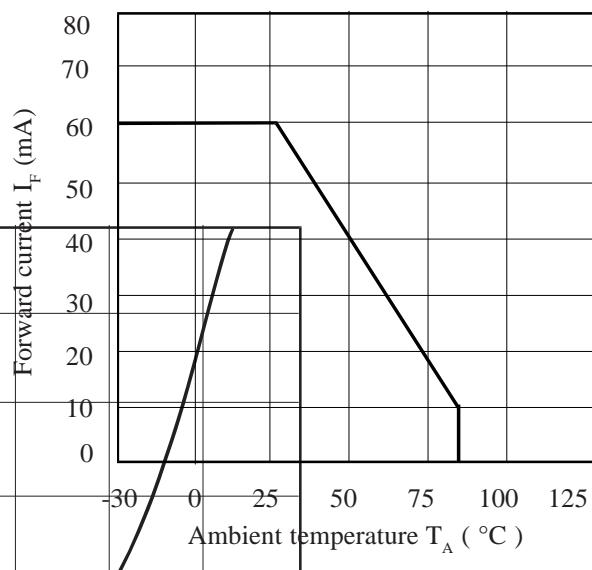


**Normalised Input Trigger Current vs. Ambient Temperature**

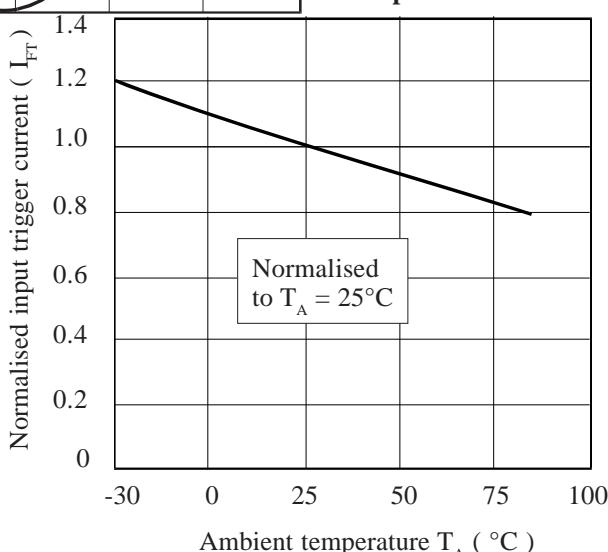


**Normalised Repetitive Peak Off-state Voltage vs. Ambient Temperature**

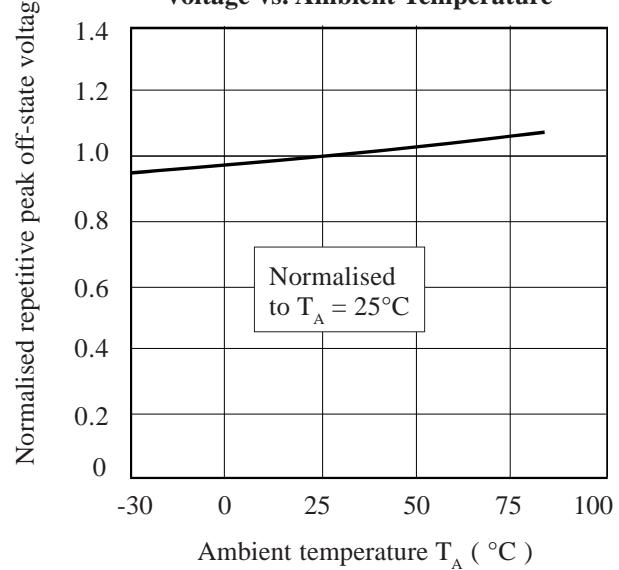

**On-state Voltage vs. Ambient Temperature**

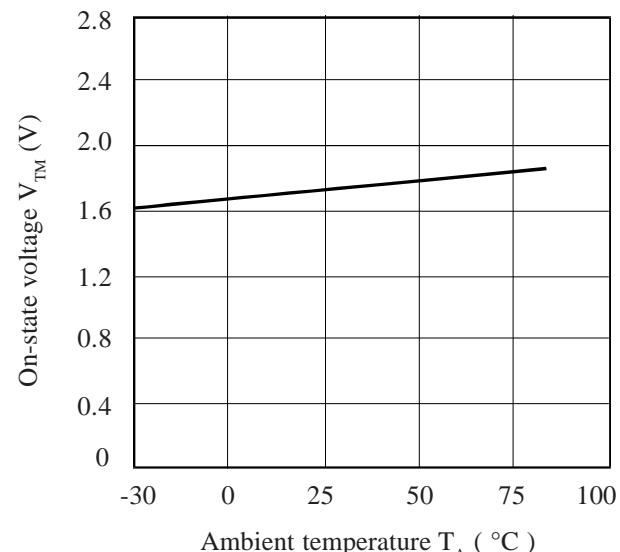

**On-state Current vs. On-state Voltage**

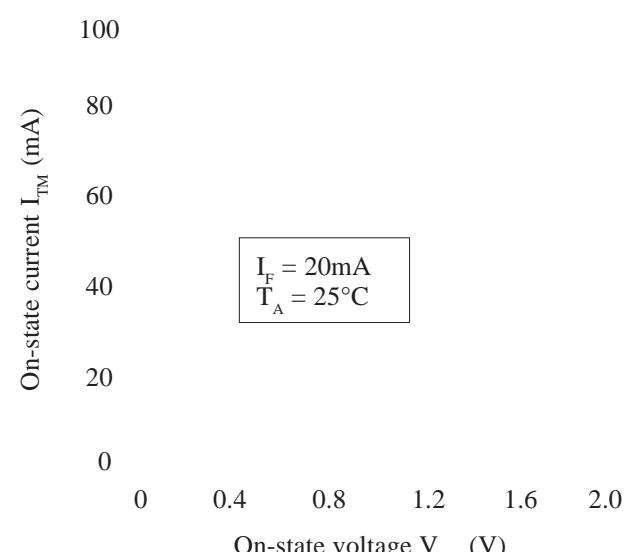

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Triac & SCR Output Optocouplers category:***

***Click to view products by Isocom manufacturer:***

Other Similar products are found below :

[IL4218-X019](#) [MOC3063S-TA](#) [IL4108-X017](#) [IL410-X019T](#) [ILD207-X001T](#) [ILD615-1X007T](#) [VO2223-X001](#) [VO3063-X017T](#) [VO4254H](#)  
[WPPCT-N1066A](#) [WPPCT-N1566A](#) [WPPCT-Z546D](#) [523170E](#) [VO4256H-X007T](#) [VO4256D-X007T](#) [VO4254M](#) [VO3063-X016](#) [VO3062-X017T](#) [WPPCT-Z546A](#) [WPPCT-Z1046D](#) [WPPCT-Z1046A](#) [WPPCT-N566D](#) [WPPCT-N566A](#) [WPPCT-N1566D](#) [IL4108-X009T](#)  
[FODM3053V\\_NF098](#) [VO4258D](#) [VO4257M](#) [VO4156D-X007T](#) [VO4154D-X007T](#) [VOM160R-X001T](#) [TLP3082\(S,C,F\)](#) [VO4156H-X006](#)  
[VO4158H-X017T](#) [IL4116-X009T](#) [IL4208-X017T](#) [TLP3083\(TP1,F\)](#) [MOC3071SM](#) [tlp548j](#) [MOC3063STA1-V](#) [TLP267J\(TPL,E\)](#) [IL4218-X017](#)  
[SFH690C-X001T](#) [IL410-X017](#) [IL410-X001](#) [VOM160P-X001T](#) [IL4116-X007](#) [IL4117-X007](#) [VO4258D-X007T](#) [VOM3053-X001T](#)