



BUS Cables

Profibus L2

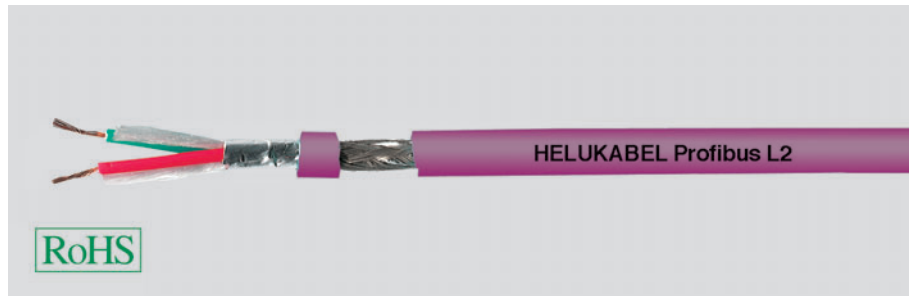

Drag Chain



Type

Cable structure

Inner conductor diameter:
Core insulation:
Core colours:
Stranding element:
Shielding 1:
Shielding 2:
Total shielding:
Outer sheath material:
Cable external diameter:
Outer sheath colour:

Drag chain applications 1x2x0.64 mm (stranded)

Copper, bare (AWG 24/19)
Foam-skin-PE
rd, gn
2 cores + 2 fillers stranded together
Polyester foil over stranded bundle
Polyester foil, aluminium-lined
Cu braid, tinned
PUR
approx. 8,0 mm ± 0,4 mm
Petrol similar to RAL 5018

Drag chain applications 1x2x0.64 mm (stranded)

Copper, bare (AWG 24/19)
Foam-skin-PE
rd, gn
2 cores + 2 fillers stranded together
Polyester foil over stranded bundle
Polyester foil, aluminium-lined
Cu braid, tinned
PUR
approx. 8,0 mm ± 0,4 mm
Violet similar to RAL 4001

Electrical data

Characteristic impedance:
Conductor resistance, max.:
Insulation resistance, min.:
Loop resistance:
Mutual capacitance:
Test voltage:
Attenuation:

150 Ohm ± 10 %
82 Ohm/km
1 GOhm x km
164 Ohm/km max.
30 nF/km nom.
1,5 kV
9,6 kHz < 3,0 dB/km
38,4 kHz < 5,0 dB/km
4 MHz < 25,0 dB/km
16 MHz < 52,0 dB/km

150 Ohm ± 10 %
82 Ohm/km
1 GOhm x km
164 Ohm/km max.
30 nF/km nom.
1,5 kV
9,6 kHz < 3,0 dB/km
38,4 kHz < 5,0 dB/km
4 MHz < 25,0 dB/km
16 MHz < 52,0 dB/km

Technical data

Weight:
Min. bending radius for laying:
Operating temperature range min.:
Operating temperature range max.:
Caloric load, approx. value:
Copper weight:

approx. 65 kg/km
60 mm
-20°C
+60°C
1,52 MJ/m
25,00 kg/km

approx. 65 kg/km
60 mm
-20°C
+60°C
1,52 MJ/m
25,00 kg/km

Norms

Applicable standards:

Profibus acc. to DIN 19245 T3 and EN50170

Profibus acc. to DIN 19245 T3 and EN50170

Application

This system cable is used to interconnect L2-BUS components. This cable is an economical solution for the cell and field area. For the information exchange between different automation systems as well as for communication with the connected decentralized field units, serial field bus systems are used. The above mentioned types are suitable for drag chains (stranded).

Part no.

81003, Profibus L2

80267, Profibus L2

Dimensions and specifications may be changed without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Paired Cables](#) category:

Click to view products by [Helukabel](#) manufacturer:

Other Similar products are found below :

[7-21000-9](#) [1213 009U1000](#) [1416402/M12MS/IP20/10](#) [9804 060100](#) [9808 060100](#) [9843 060100](#) [9873 060100](#) [190-038045-00](#)
[44A0121-12-996CS2275](#) [55PC0211-14-9](#) [55PC0216-24-9](#) [55PC0221-22-2/6CS2756](#) [55PC0811-16-9](#) [55PC0811-24-9](#) [55PC1131-20-029-9](#)
[Y60912](#) [CW1922-000](#) [RI55D](#) [9157 060100](#) [2020D0309-0](#) [9774 060100](#) [8334 060100](#) [1350SB 0101000](#) [2412 0061000](#) [8342 060100](#) [8740](#)
[060U1000](#) [9505 060U1000](#) [3613 003A1000](#) [44A0121-22-0/9-MX](#) [2412 009U1000](#) [82777 8771000](#) [9406 T35100](#) [2413 002A1000](#) [3613](#)
[D151000](#) [1533R 0101000](#) [1533P 0101000](#) [9272 006U1000](#) [2413F D15A500](#) [9681 0601000](#) [1533R 0061000](#) [RIT1000](#) [1533R 006A1000](#)
[9812 060100](#) [2221 B59U1000](#) [10GX13 D151000](#) [1874A 004A1000](#) [8340 060100](#) [8333 0601000](#) [1533R 0021000](#) [1583A 012U1000](#)