

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

AXIAL LEADED HERMETICALLY SEALED HIGH VOLTAGE STANDARD RECOVERY RECTIFIER DIODE

QUICK REFERENCE DATA


- High thermal shock resistance
- Hermetically sealed with Metoxillite fused metal oxide
- Multi-junction construction
- Low reverse leakage currents
- Subminiature body size

- $V_R = 2kV - 3kV$
- $I_F = 600mA$
- $t_{rr} = 2.5\mu S$
- $I_R = 1.0\mu A$

ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

| | Symbol | 1N3645 SM20 | 1N3646 SM25 | 1N3647 SM30 | Unit |
|--|-------------|-----------------|----------------|----------------|------|
| Working reverse voltage | V_{RWM} | 2000 | 2500 | 3000 | V |
| Repetitive reverse voltage | V_{RRM} | 2000 | 2500 | 3000 | V |
| Average forward current (@ 55°C in oil) | $I_{F(AV)}$ | ← 600 → | | | mA |
| Repetitive surge current (@ 55°C in oil, lead length 0.375") | I_{FRM} | ← 2.5 → | | | A |
| Non-repetitive surge current ($t_p = 8.3ms$, @ V_R & T_{jmax}) | I_{FSM} | ← 14 → | | | A |
| Storage temperature range | T_{STG} | ← -65 to +175 → | | | °C |
| Operating temperature range | T_{OP} | ← -65 to +175 → | | | °C |

MECHANICAL

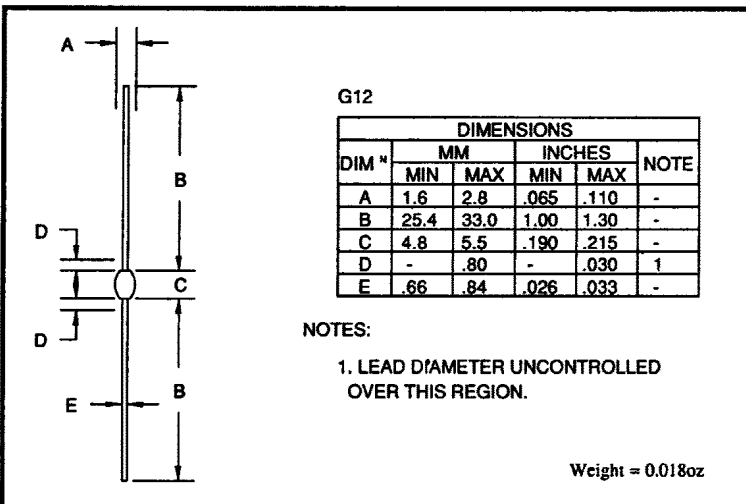

These products are qualified to MIL-S-19500/279 and are preferred parts as listed in MIL-STD-701. They can be supplied fully released as JAN and JANTX versions.

These products are available in Europe to DEF STAN 59-61 (PART 80)/034.

January 7, 1998

CHARACTERISTICS (@ 25 $^{\circ}$ C unless otherwise specified)

| | Symbol | 1N3645 SM20 | 1N3646 SM25 | 1N3647 SM30 | Unit |
|--|-----------------|----------------|----------------|----------------|---------------|
| Average forward current for sine wave - max. pcb mounted | $I_{F(AV)}$ | ← 260 → | | | mA |
| - max. in unstirred oil | $I_{F(AV)}$ | ← 600 → | | | mA |
| I^2t for fusing (t = 8.3ms) max. | I^2t | ← 0.026 → | | | A 2 S |
| Forward voltage drop max. @ $I_F = 250mA$, $T_j = 25^{\circ}C$ | V_F | ← 5.00 → | | | V |
| Reverse current max. @ V_{RWM} , $T_j = 25^{\circ}C$ | I_R | ← 1.00 → | | | μ A |
| @ V_{RWM} , $T_j = 100^{\circ}C$ | I_R | ← 20.0 → | | | μ A |
| Reverse recovery time max. 50mA I_F to 100mA I_R . Recover to 25mA I_{RR} . | t_{rr} | ← 2.5 → | | | μ S |
| Junction capacitance typ. @ $V_R = 5V$, f = 1MHz | C_j | ← 8.0 → | | | pF |
| Thermal resistance - junction to oil Unstirred @ 55 $^{\circ}C$ | $R_{\theta JO}$ | ← 30.0 → | | | $^{\circ}C/W$ |
| Stirred @ 55 $^{\circ}C$ | $R_{\theta JO}$ | ← 18.0 → | | | $^{\circ}C/W$ |
| Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper. | $R_{\theta JA}$ | ← 90.0 → | | | $^{\circ}C/W$ |

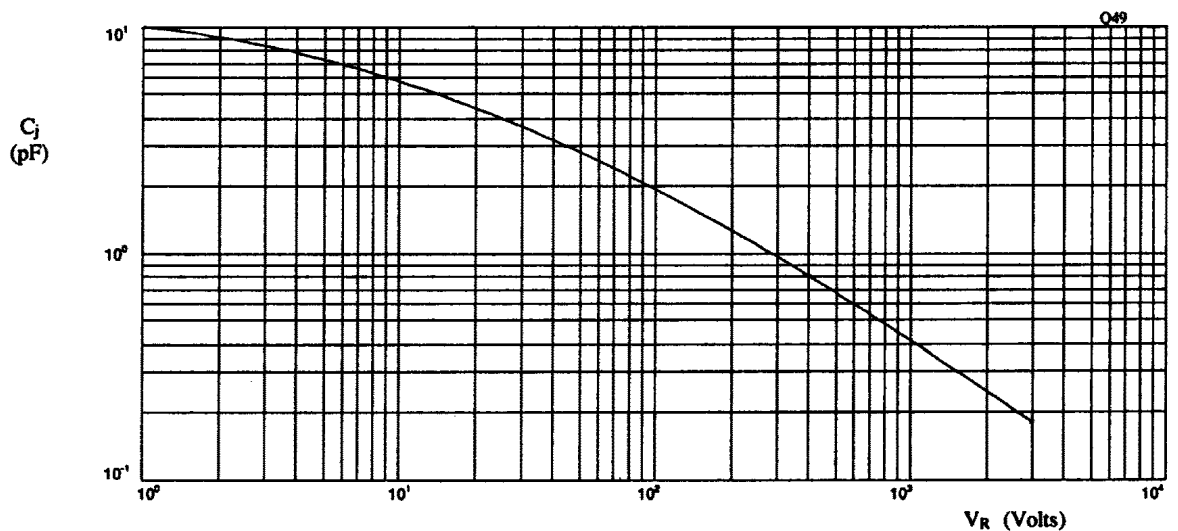


Fig 1. Typical junction capacitance as a function of reverse voltage.

January 7, 1998

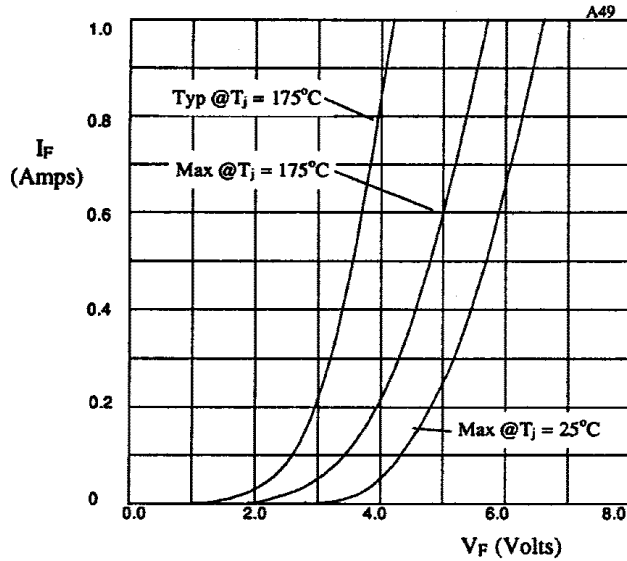


Fig 2. Forward voltage drop as a function of forward current.

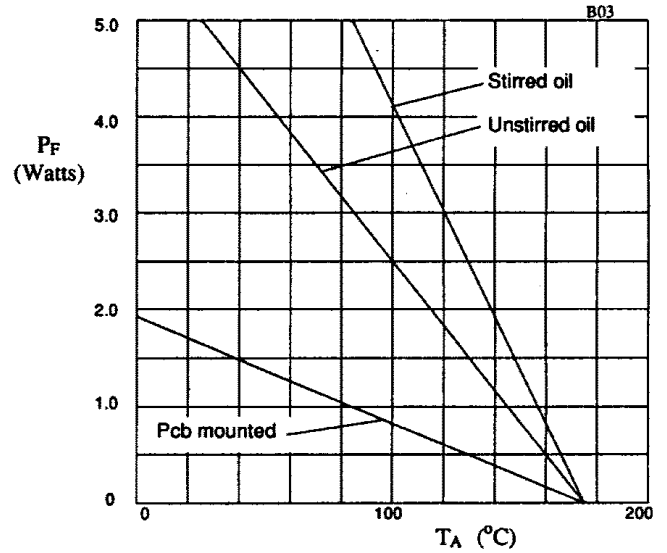


Fig 3. Power derating in oil and air.

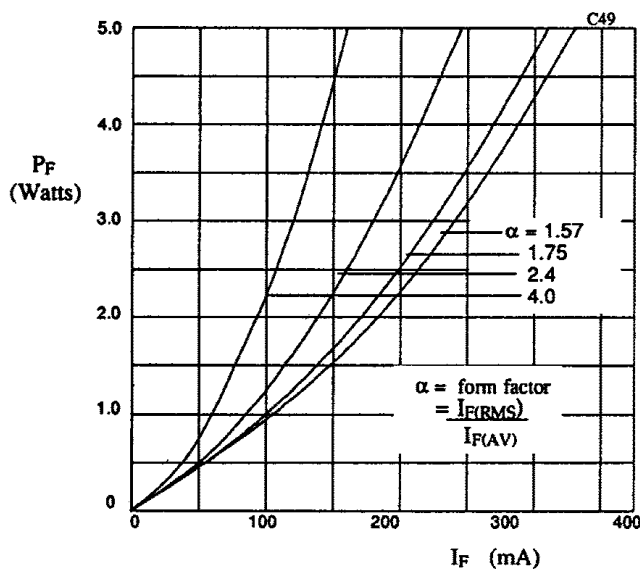


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

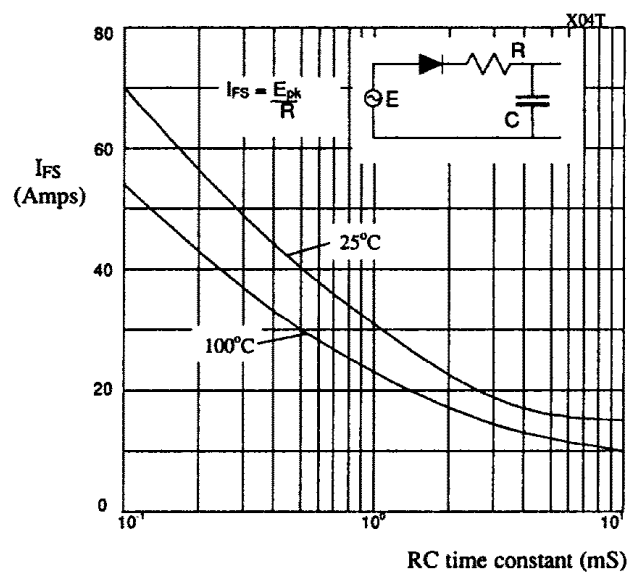


Fig 5. Maximum ratings for capacitive loads.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [semtech](#) manufacturer:

Other Similar products are found below :

[EBK-GS2971A-00](#) [SC202AEVB](#) [SLVU2.8-4.T](#) [SX1211SKA868](#) [SX8651EVKA](#) [EBK-GS6080-00](#) [SC183CULTRT](#) [SX1243SKA915](#)
[SX1211-11SKA868](#) [JANTXV1N5811US](#) [JANTX1N4986](#) [JANTX1N5552](#) [SM1231E868](#) [GRP-DATA-JANTXV1N5806US](#) [GRP-DATA-](#)
[JANS1N5811US](#) [1N6147](#) [EBK-GS3471-00](#) [GRPA-DATA-JANTXV1N6463US](#) [GRP-A-DATA-JANTX1N4465](#) [SC3BA6](#) [SM1211E868](#)
[SX1243SKA433](#) [SX1508BEVK](#) [SX8674EVK](#) [GS1524-CKDE3](#) [IOT434STK1-8](#) [IOT915STK1-8](#) [IOT922STK1-8](#) [SC3BH6](#) [SX1211-](#)
[11SKA915](#) [TSDMRX-5W-EVM](#) [SX1276DVK1JAS](#) [SM1212E433](#) [1N6138US](#) [SCH10000](#) [TS13102_TS13103_Combio_PTO_EVM](#) [RDK-](#)
[12GCONV-01](#) [IOT9USATREF-1](#) [1N4469](#) [SX1272DVK1BAS](#) [SX1276DVK1IAS](#) [SA4684](#) [SX9300EVKA](#) [SX1276DVK1KAS](#)
[JANTX1N5806T/R](#) [JANTX1N5806/TR](#) [TSDMTX-5V2-EVM](#) [SX1268DVK1GAS](#) [SX1302CSS915GW1](#) [SX1276RF1KAS](#)