




SHENZHEN HAOLIN ELECTRONICS TECHNOLOGY CO., LTD

TO-220F SCHOTTKY BARRIER RECTIFIERS

MBR20150CT

FEATURES

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications

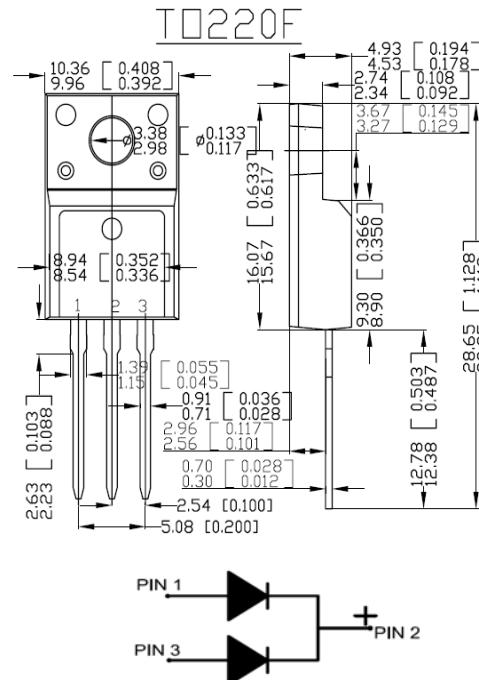

Dimensions in millimeters and (inches)

ELECTRICAL CHARACTERISTICS (Tamb=25°C)

| Characteristic | Symbol | MBR20150CT | Unit |
|---|-----------------------------------|------------------------------|------|
| Peak Repetitive Reverse Voltage | V _{RRM} | | |
| Working Peak Reverse Voltage | V _{RWM} | 150 | V |
| DC Blocking Voltage | V _R | | |
| Average Rectified Output Current | I _c | 20 | A |
| Maximum Instantaneous Forward Voltage @ I _F = 10A, T _c = 25°C @ I _F = 10A, T _c = 125°C @ I _F = 20A, T _c = 25°C @ I _F = 20A, T _c = 125°C | V _F | 0.85 0.82 0.95 0.85 | V |
| Peak Reverse Current @ T _c = 25°C at Rated DC Blocking Voltage @ T _c = 125°C | I _R | 50 200 | uA |
| Operating and Storage Temperature Range | T _j , T _{stg} | -55 to +150 | °C |

Fig. 1: Average forward power dissipation versus average forward current (per diode).

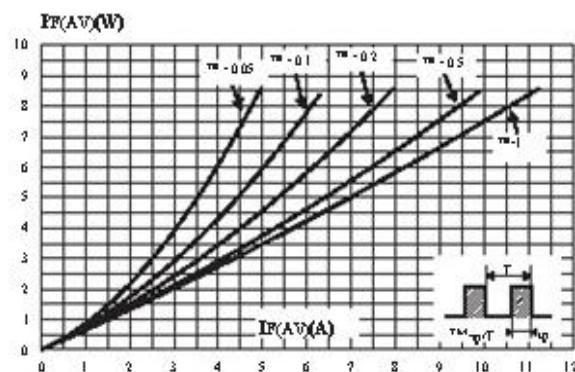


Fig. 2: Average forward current versus ambient temperature ($\delta = 0.5$, per diode).

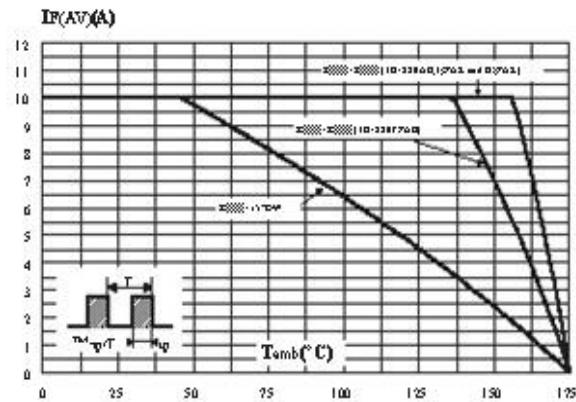


Fig. 3: Junction capacitance versus reverse voltage applied (typical values, per diode).

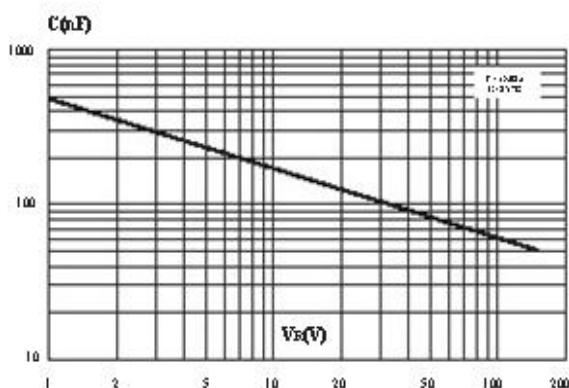


Fig. 4: Normalized avalanche power derating versus junction temperature.

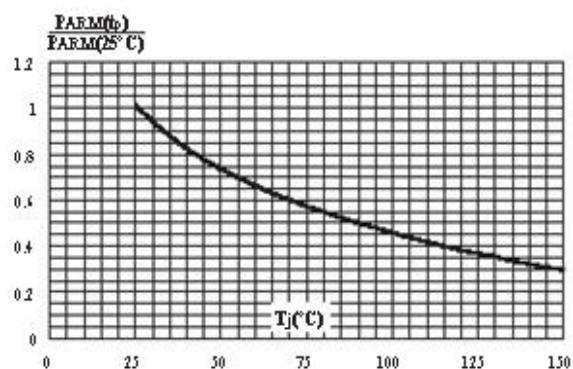


Fig. 5 : Reverse leakage current versus reverse voltage applied (typical values, per diode).


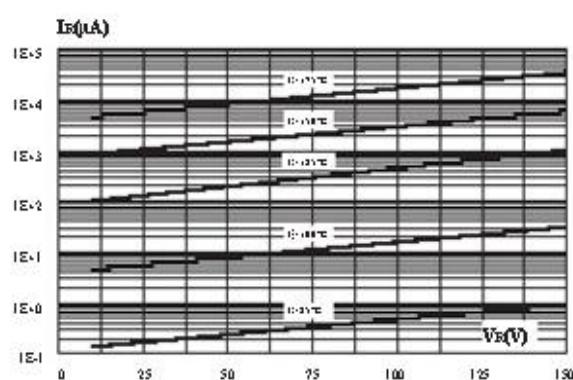


Fig. 6: Non repetitive surge peak forward current versus overload duration (maximum values, per diode).

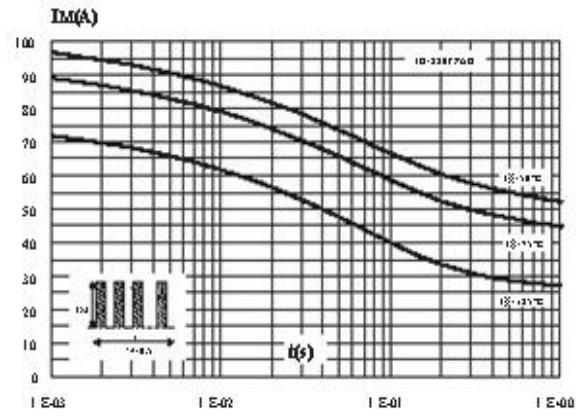

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Haolin manufacturer:

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)