


# FRA2 RELAY



## FEATURES

- Miniature high power designed for P.C. Board
- Automobile relay with high switching power
- Capable of switching lamp 150W or 14VDC 40A (resistive load)
- Low cost and high performance
- European(11mm) or USA(8mm) footprints
- Open type, dust cover or sealed type



## SPECIFICATIONS

### COIL RATING

RATED VOLTAGE ( V DC)	COIL RESISTANCE $\Omega$ +/- 10 %	RATED CURRENT (mA)	MUST OPERATE VOLTAGE	MUST DROPOUT VOLTAGE	MAXIMUM VOLTAGE	POWER CONSUMPTION (W)
			% OF RATED VOLTAGE (At +20 °C)			
6	19	315	57.5 Max.	10 Min.	150 Max.	1.6 Approx.
12	90	133				
24	362	66				

### CHARACTERISTICS

Contact Arrangement	SPST ( 1 Form A or 1 Form B); SPDT (1 Form C)
Contact Material	Silver Alloy
Contact Resistance	30m $\Omega$ Max.
Contact Rating (Resistive Load)	NO : 40A/14VDC NC : 30A/14VDC <Special Request NO : 45A 14VDC>
Switching Voltage	DC 75V Max.
Operate Time (Initial)	5ms Max.
Release Time (Initial)	3ms Max.
Insulation Resistance	100M $\Omega$ Min.( 500V DC)
Dielectric Strength	500V AC(50Hz/min.) Between open contacts 750V AC(50Hz/min.) Between coil and contact
Shock Resistance	20g Approx.
Vibration Resistance	1.27mm Double amplitude, 10-40Hz
Ambient Temperature	Storage : -40°C to +130°C Operation : -40°C to +85°C
Humidity	20 - 85% RH
Operation Life	Mechanical : 10 <sup>7</sup> Electrical : 10 <sup>5</sup> (At rated load)
Weight	(Open type) 18g Approx., (Sealed type) 23g Approx.

[Specifications are subject to change without notices.]

## FORWARD INDUSTRIAL COMPANY (O/B COMMERCIAL UNION LTD)

RM. 1450, Wu Sang House, 655 Nathan Road, Mongkok, Hong Kong.


TEL : (852) 27892365 FAX : (852) 27893102 E-MAIL : sales@ficrelay.com.hk WEBSITE : http://www.ficrelay.com.hk

# FRA2 RELAY



## ORDERING INFORMATION

**FRA2 C - C 1 DC12V**

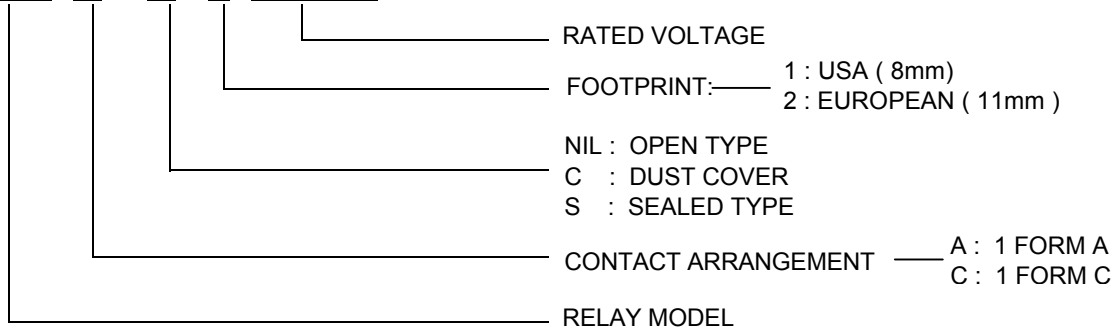


Note : Pb-Free and RoHS compliant relays are available.

For ordering, please add suffix "Pb-Free" or "RoHS" to standard relay part numbers.


**For example : FRA2C-C1 DC 12V "Pb-Free" For Pb-Free Relay**  
**For example : FRA2C-C1 DC 12V "RoHS" For RoHS Compliant Relay**

## DIMENSIONS(Unit:mm)


OPEN TYPE

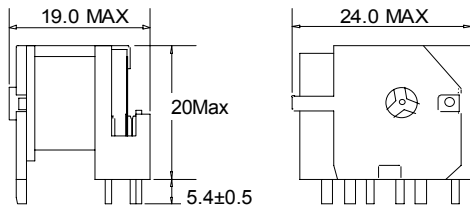


SEALED TYPE

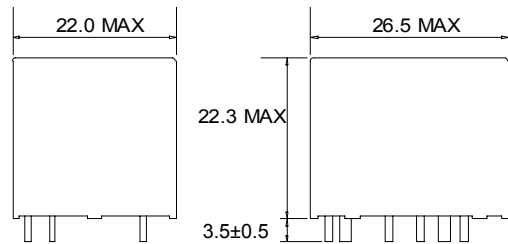

USA FOOTPRINT (8MM)  
(BOTTOM VIEW)  
FRA2X-X1

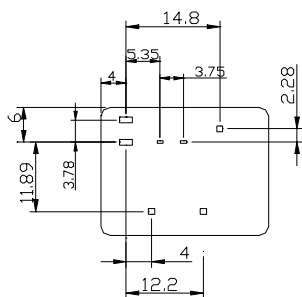


EUROPEAN FOOTPRINT (11MM)  
(BOTTOM VIEW)  
FRA2X-X2

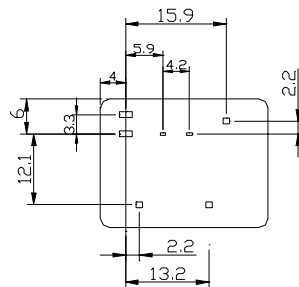


WIRING DIAGRAMS

1 FORM A (SPST)



1 FORM C (SPDT)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Relays](#) category:*

*Click to view products by [Forward](#) manufacturer:*

Other Similar products are found below :

[896H-1AH-D1SW-001-24VDC](#) [896H-1AH-D1SW-R1-12VDC](#) [896H-1CH-C1-001-12VDC](#) [896H-1CH-S-24VDC](#) [896HP-1AH-C-12VDC](#)  
[G5CE1ASIDC12](#) [AEV31024](#) [1393204-2](#) [1393302-3](#) [13Z99A115-0074](#) [1432872-1](#) [1617057-2](#) [2-1617057-2](#) [CB1F-M-12V-H15](#) [CB1-T-R-M-](#)  
[12V](#) [896H-1CH-D1SF-R1-12VDC](#) [896H-1CH-D1SF-R1-T-12VDC](#) [898H-1AH-D-001-12VDC](#) [24198-1](#) [5-1616920-2](#) [5-1617052-9](#) [5407-](#)  
[0011-HS](#) [CB1AF-M-12V-H59](#) [5-1617346-8](#) [103-1AH-C-12VDC](#) [CF2Q-12V](#) [V23134A1052X299](#) [CP112J](#) [896H-1AH-S1-001-12VDC](#)  
[897H-1AH-D-R1-U01-12VDC](#) [896H-1CH-D-U39-24VDC](#) [896HP-1AH-C-U2120VDC](#) [896E-1CH-D1SW-U57-12VDC](#) [896H-1CH-D1SW-](#)  
[R1-U30-12VDC](#) [896H-1AH-C1S-R1-24VDC](#) [102-1CH-C-12VDC](#) [V23076A3001D142T](#) [1-19042-6](#) [3-1393305-1](#) [J7TKNA9](#)  
[V23234A1001X043-EV-144](#) [V23086-R1851-A502](#) [898H-1AH-D1SW-R1-12VDC](#) [RH4C1P2607](#) [RE031005](#) [V23134M0052G242](#) [1393204-1](#)  
[G8N-1L-AS DC12](#) [V23076A3022D142](#) [V23074A2001A402](#)