



TRA(16V) Series

Features

- ◆ Radial Leaded Devices
- ◆ Cured, flame retardant epoxy polymer insulating material meets UL 94V-0 requirements
- ◆ Bulk Package, or tape and reel available on most models
- ◆ UL(Pending), C-UL(Pending), TUV(R50322003)
- ◆ RoHS, Reach, HF compliance

Applications

Almost anywhere there is a low voltage power supply, up to 16V and a load to be protected, including:

- ◆ Personal computer
- ◆ Toys
- ◆ Medical electronics
- ◆ Personal care product



电气特性：

P/N	保持电流	跳脱电流	最大电压	最大电流	最大动作时间		消耗功率	电阻范围 (Ω)		
	I_H , (A)	I_T , (A)	V_{max} , (V)	I_{max} , (A)	(A)	(Sec.)	$P_{d\ typ}$, (W)	R_{min} ,	R_{max} ,	$R1_{max}$,
TRA005	0.05	0.10	16	40	0.25	5.0	0.26	8.00	11.50	17.00
TRA010	0.10	0.20	16	40	0.50	4.0	0.35	2.00	4.50	6.70
TRA017	0.17	0.34	16	40	0.85	3.0	0.36	0.980	1.800	2.700
TRA020	0.20	0.40	16	40	1.00	3.0	0.36	0.780	1.600	2.200
TRA025	0.25	0.50	16	40	1.25	3.0	0.36	0.500	1.100	1.650
TRA030	0.30	0.60	16	40	1.50	3.0	0.36	0.350	0.700	1.050
TRA040	0.40	0.80	16	40	2.00	3.0	0.40	0.230	0.650	0.970
TRA050	0.50	1.00	16	40	2.50	3.0	0.45	0.170	0.400	0.810
TRA065	0.65	1.30	16	40	3.25	3.0	0.45	0.110	0.300	0.450
TRA075	0.75	1.50	16	40	3.75	3.0	0.54	0.080	0.230	0.260
TRA090	0.90	1.80	16	40	4.50	3.2	0.54	0.070	0.180	0.210
TRA110	1.10	2.20	16	40	5.50	4.0	0.54	0.045	0.140	0.170
TRA120	1.20	2.40	16	40	6.00	4.0	0.54	0.040	0.120	0.160
TRA135	1.35	2.70	16	40	6.75	4.0	0.54	0.035	0.100	0.140
TRA160	1.60	3.20	16	40	8.00	4.5	0.54	0.030	0.100	0.110
TRA185	1.85	3.70	16	40	9.25	4.5	0.54	0.030	0.080	0.100
TRA200	2.00	4.00	16	40	10.0	5.0	0.90	0.020	0.065	0.090
TRA250	2.50	5.00	16	40	12.5	5.0	0.90	0.015	0.050	0.070
TRA300	3.00	6.00	16	40	15.0	4.0	0.90	0.010	0.040	0.055
TRA400	4.00	8.00	16	40	20.0	3.0	1.35	0.010	0.030	0.045
TRA500	5.0	10.0	16	100	25.0	5.0	2.6	0.009	0.027	0.033
TRA600	6.0	12.0	16	100	30.0	7.0	2.8	0.007	0.021	0.031
TRA700	7.0	14.0	16	100	35.0	8.0	3.0	0.006	0.015	0.020
TRA800	8.0	16.0	16	100	40.0	9.0	3.0	0.004	0.013	0.018
TRA900	9.0	18.0	16	100	45.0	12.0	3.3	0.003	0.012	0.016
TRA1000	10.0	20.0	16	100	50.0	12.5	3.7	0.002	0.011	0.015
TRA1100	11.0	22.0	16	100	55.0	13.5	3.7	0.002	0.010	0.013
TRA1200	12.0	24.0	16	100	60.0	15.0	4.2	0.002	0.009	0.012
TRA1300	13.0	26.0	16	100	65.0	18.0	4.2	0.002	0.008	0.011
TRA1400	14.0	28.0	16	100	70.0	20.0	4.2	0.002	0.008	0.011




FUSES

电路保护元器件专业制造商

TRA(16V) Series

产品尺寸 (Unit: mm) :

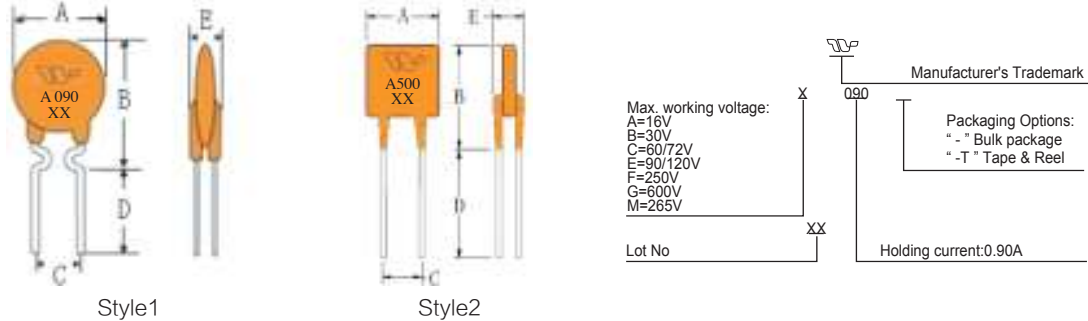

P/N	A	B	C	D	E	物理特性		
	Max.(最大)	Max.(最大)	Typ.(标准)	Min.(最小)	Max.(最大)	Style(样式)	Lead Φ(mm)	Material(标准)
TRA005	5.7	10.5	5.1	7.6	3.1	1	0.50	CP
TRA010	5.7	10.5	5.1	7.6	3.1	1	0.50	CP
TRA017	5.7	10.5	5.1	7.6	3.1	1	0.50	CP
TRA020	5.7	10.5	5.1	7.6	3.1	1	0.50	CP
TRA025	5.7	10.5	5.1	7.6	3.1	1	0.50	CP
TRA030	5.7	10.5	5.1	7.6	3.1	1	0.50	CP
TRA040	5.7	10.5	5.1	7.6	3.1	1	0.50	CP
TRA050	5.7	10.5	5.1	7.6	3.1	1	0.50	CP
TRA065	6.5	13.2	5.1	7.6	3.1	1	0.50	CP
TRA075	6.5	13.2	5.1	7.6	3.1	1	0.50	CP
TRA090	7.4	13.0	5.1	7.6	3.1	1	0.50	CP
TRA110	7.4	13.0	5.1	7.6	3.1	1	0.50	CP
TRA120	7.4	13.0	5.1	7.6	3.1	1	0.50	CP
TRA135	9.4	14.5	5.1	7.6	3.1	1	0.50	CP
TRA160	9.4	14.5	5.1	7.6	3.1	1	0.50	CP
TRA185	9.4	14.5	5.1	7.6	3.1	1	0.50	CP
TRA200	10.7	16.7	5.1	7.6	3.1	1	0.60	Cu
TRA250	10.7	16.7	5.1	7.6	3.1	1	0.60	Cu
TRA300	10.7	16.7	5.1	7.6	3.1	1	0.60	Cu
TRA400	11.5	17.9	5.1	7.6	3.1	1	0.60	Cu
TRA500	13.0	18.3	5.1	7.6	3.1	2	0.80	Cu
TRA600	13.0	18.3	5.1	7.6	3.1	2	0.80	Cu
TRA700	16.3	21.3	5.1	7.6	3.1	2	0.80	Cu
TRA800	17.8	22.9	5.1	7.6	3.1	2	0.80	Cu
TRA900	21.3	26.4	5.1	7.6	3.1	2	0.80	Cu
TRA1000	21.3	26.4	5.1	7.6	3.1	2	0.80	Cu
TRA1100	20.8	29.8	10.2	7.6	3.1	2	0.80	Cu
TRA1200	20.8	29.8	10.2	7.6	3.1	2	0.80	Cu
TRA1300	24.2	32.9	10.2	7.6	3.1	2	0.80	Cu
TRA1400	24.2	32.9	10.2	7.6	3.1	2	0.80	Cu

PPTC RESETTALBE

FUSES



Revision: A
Date: 2018-04-24
No.: 1 OF 3




TRA(16V) Series

环境温度与工作电流关系特性曲线：

P/N	工作环境温度								
	-40℃	-20℃	0℃	25℃	40℃	50℃	60℃	70℃	85℃
TRA005	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.03	0.02
TRA010	0.17	0.15	0.13	0.10	0.07	0.06	0.05	0.04	0.03
TRA017	0.27	0.24	0.21	0.17	0.14	0.12	0.09	0.07	0.05
TRA020	0.32	0.28	0.25	0.20	0.16	0.14	0.12	0.10	0.07
TRA025	0.40	0.34	0.29	0.25	0.20	0.17	0.15	0.13	0.09
TRA030	0.47	0.41	0.36	0.30	0.24	0.21	0.18	0.14	0.10
TRA040	0.62	0.53	0.46	0.40	0.31	0.28	0.23	0.20	0.16
TRA050	0.77	0.67	0.58	0.50	0.40	0.34	0.30	0.25	0.19
TRA065	1.00	0.87	0.75	0.65	0.51	0.45	0.40	0.34	0.22
TRA075	1.04	0.94	0.83	0.75	0.61	0.54	0.46	0.41	0.29
TRA090	1.39	1.22	1.07	0.90	0.72	0.63	0.53	0.45	0.33
TRA110	1.61	1.43	1.24	1.10	0.89	0.83	0.74	0.66	0.56
TRA120	1.76	1.56	1.35	1.20	0.97	0.91	0.81	0.72	0.61
TRA135	1.98	1.75	1.54	1.35	1.08	1.01	0.89	0.78	0.67
TRA160	2.30	2.06	1.82	1.60	1.33	1.20	1.05	0.96	0.78
TRA185	2.68	2.41	2.13	1.85	1.53	1.40	1.23	1.13	0.93
TRA200	3.14	2.70	2.28	2.00	1.80	1.72	1.34	1.23	1.03
TRA250	3.63	3.25	2.88	2.50	2.08	1.93	1.70	1.53	1.30
TRA300	4.34	3.87	3.42	3.00	2.49	2.28	2.02	1.82	1.52
TRA400	5.78	5.15	4.58	4.00	3.28	3.04	2.68	2.42	2.07
TRA500	7.23	6.44	5.73	5.00	4.10	3.80	3.35	3.03	2.59
TRA600	10.12	9.01	8.02	7.00	5.74	5.32	5.25	4.24	3.62
TRA700	10.12	9.01	8.02	7.00	5.74	5.32	5.25	4.24	3.62
TRA800	11.56	10.30	9.16	8.00	6.56	6.08	5.36	4.84	4.14
TRA900	13.00	11.58	10.30	9.00	7.38	6.84	5.36	4.84	4.14
TRA1000	14.45	12.88	11.45	10.00	8.20	7.60	6.70	6.05	5.18
TRA1100	15.89	14.16	12.60	11.0	9.02	8.36	7.37	6.66	5.69
TRA1200	17.34	15.45	13.74	12.00	9.84	9.12	8.04	7.26	6.21
TRA1300	18.79	16.74	14.89	13.00	12.66	9.88	8.71	7.87	6.73
TRA1400	20.23	18.03	16.03	14.00	15.31	10.64	9.38	8.47	7.25

动作电流时间曲线表：

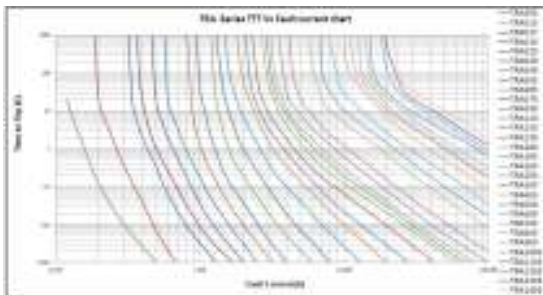

PPTC RESETTALBE FUSES



Revision: A
Date: 2018-04-24
No.: 1 OF 4



TRA(16V) Series

标准包装数量 :

Model	Q' t y/bag
TRA005-TRA500	1000pcs
TRA600-TRA800	500pcs
TRA900-TRA1400	200pcs
Tape and Reel Specifications	
Devices taped using EIA468 - B/IEC286-2 standards.	

6、Agency Recognition:



Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame. Specifications are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC category](#):

Click to view products by [TLC manufacturer](#):

Other Similar products are found below :

[0001.1010.G](#) [D38999/20WG39JN](#) [F02B250V1-4AS](#) [9728214S-2\(621\)](#) [RF0627-000](#) [RF2534-000](#) [ASMD185-2](#) [EN2997S61212AN](#)
[EN2997SE61203AN](#) [BK-ABC-V-5-R](#) [LR4-550RAF](#) [SMD125-2](#) [F60C500V20AS](#) [RF0078-000](#) [RF1548-000](#) [RF1973-000](#) [RF2171-000](#)
[RF2531-000](#) [RF2533-000](#) [RF2550-000](#) [TR600-150Q-B-0.5-0.130](#) [BK-AGX-20](#) [5E4795/04-1502](#) [EN2997S61212MN](#) [EN2997SE61203MN](#)
[EN2997SE61212AN](#) [EN2997SE61212MN](#) [BK1/S505-1.25-R](#) [TR-3216FF20-R](#) [TRF250-080T-B-1.0-0.125](#) [JT06RT1832BN014](#) [S-3-2-10](#)
[SMD100-2](#) [FRN-R-5-6-10](#) [FRS-R-3-2-10](#) [LP-CC-2-1-2](#) [LPS-RK-3-2-10SP](#) [BK-AGC-1-8-R](#) [BK-AGC-2-10-R](#) [BK-AGC-7-1-2](#) [BK-GDC-](#)
[500MA](#) [BK-MDL-1-6-10-R](#) [BK-SFE-4](#) [BK-ABC-1-R](#) [BK-C518-250-R](#) [BK-GDB-2A](#) [BK-MDL-1-8-R](#) [BK-MDL-6](#) [BK-AGC-5-R](#) [BK-ATC-](#)