



AKER P/N

CXAN-025000-3F12D40

APPROVED

張秀菊
Kiku 張秀菊

SHEET

1 OF 1

PREPARED

REV.

A0

AKER
2018.3.20
DCC


1. ELECTRICAL CHARACTERISTICS

Parameters	Symbol	Electrical Specification				Notes
		Min.	Typ.	Max.	Unit	
Nominal Frequency	FL	25.000000			MHz	AT cut / Fundamental
Frequency Tolerance		-10	~	10	ppm	At 25°C ± 1°C
Frequency Stability		-20	~	20	ppm	Related to 25 °C
Load Capacitance	CL	12			pF	
Operating Temperature Range		-40	~	85	°C	
Storage Temperature Range		-55	~	125	°C	
Drive Level	DL			200	uW	
Effective Series Resistance	ESR			40	Ω	
Drive Level Dependence 0.01/0.05/0.1/0.5/1/5/10/50/ 100/200 uW	DLD2			12	Ω	
	RLD2			40	Ω	
	FDDL			10	ppm	
Shunt Capacitance	C0			3	pF	
Motional Capacitance	C1		N/A		fF	
Ratio Of Capacitance	C0/C1		N/A			
Aging Rate		-3		3	ppm	Year
Insulation Resistance		500			MOhms	At DC 100V


2. PROHIBITION AND RESTRICTION OF HAZARDOUS SUBSTANCES

Meet The Specification Of AKER QC-P16-03 (RoHS compliant and REACH)

3. MARKING (Refer To P/O)

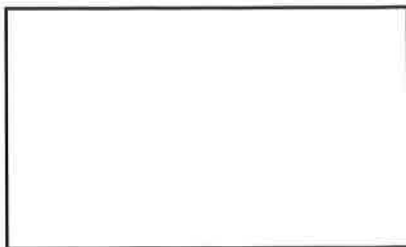

5. DIMENSIONS (Unit:mm)

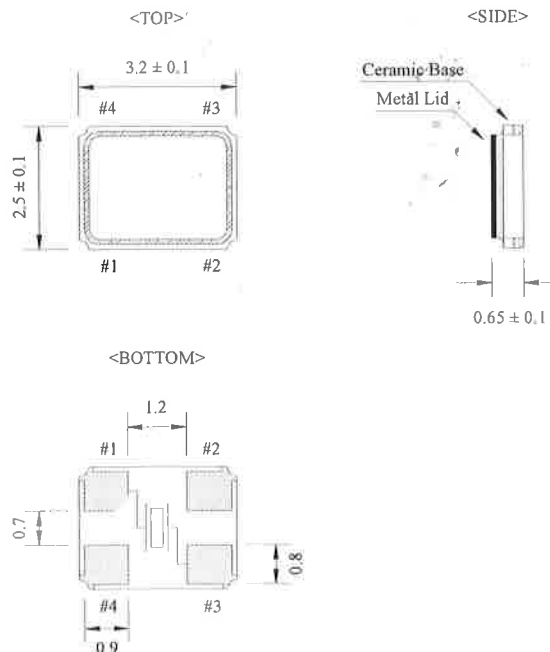

4. PLATING METHOD OF LID

- Electroless
- Electrolytic

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Aker](#) manufacturer:

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFX TAL066198Cutt](#)
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)
[LFX TAL065253Cutt](#) [LFX TAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)