



Document Number: 0017SP0004-0418

Revision: 2.0.0 05/2018

# **AK1056D Mobile Multimedia Application Processor Specification**

# Table of Contents

<b>1</b>	<b>Introduction</b> .....	<b>1-1</b>
1.1	Features .....	1-1
1.2	Applications .....	1-2
1.3	Product Documentation.....	1-2
1.4	Ordering Information .....	1-2
1.5	Part Number Information.....	1-3
<b>2</b>	<b>Signals and Connections</b> .....	<b>2-4</b>
2.1	Pin Definitions .....	2-4
2.2	Shared-pin List .....	2-4
<b>3</b>	<b>Electrical Specifications</b> .....	<b>3-1</b>
3.1	Maximum Ratings .....	3-1
3.2	Recommended Operating Range .....	3-1
3.3	Electrical Characteristics of PMU.....	3-2
3.4	DC Electrical Characteristics.....	3-5
3.5	AC Electrical Characteristics.....	3-5
3.6	Bluetooth RF Characteristics .....	3-6
3.7	Analog Interface Characteristics .....	3-6
3.8	Power-down and Sniff Supply Current.....	3-6
<b>4</b>	<b>Package Information</b> .....	<b>4-8</b>
4.1	Pin Assignment .....	4-8
4.2	Package Information .....	4-9
<b>5</b>	<b>Reflow Profile</b> .....	<b>5-11</b>
<b>6</b>	<b>Storage and Baking</b> .....	<b>6-13</b>

The copyright reserved by Anyka Technologies Corporation. Reproduction or distribution of this document and its content is prohibited without written confirmation of Anyka.

All intellectual property right relating to this document and its content reserved by Anyka Technologies Corporation or legally authorized by its partners.

THE INFORMATION IS PROVIDED WITHOUT ANY EXPRESS OR IMPLIED WARRANTY OF ANY KIND INCLUDING WITHOUT LIMITATION WARRANTIES OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, OR NONINFRINGEMENT OF INTELLECTUAL PROPERTY OF ANY THIRD PARTY RELATING TO ANYKA PRODUCTS. IN NO EVENT SHALL ANYKA BE LIABLE FOR ANY DAMAGES WHATSOEVER ARISING OUT OF THE USE OR EXECUTION OF THIS DOCUMENT AND ITS CONTENT

This document provides the information "AS IS". Anyka may make changes to this document, or to specifications, product descriptions, and plans described therein at any time, without notice.

## Contact Information

Anyka (Guangzhou) Microelectronics Technology Co., Ltd

3/F, Block C1, No.182 Science Rd,

Guangzhou, Guangdong 510663

P.R. China

Tel: (86)-20-3221 9000

Fax: (86)-20-3221 9258

### Sales Hotline:

(86)-20-3221 9499

### E-mail:

sales@anyka.com

### Home Page:

<http://www.anyka.com>

## Document Revision History

The following table provides revision history for this release. This history includes technical content revisions only and not stylistic or grammatical changes.

VERSION	DESCRIPTION	DATE COMPLETED
2.0.0	Initial release	May, 2018

## About This Manual

This document is the electrical and mechanical specification data sheet for the AK1056D processor. This specification contains a functional overview, mechanical data, package signal locations, electrical specifications (simulated), and bus functional waveforms.

Anyka Confidential For  
Onway Use Only

## Definitions, Acronyms, and Abbreviations

Unless otherwise specified, all the acronyms and abbreviations used in this manual are defined hereunder.

ADC	Analog to Digital Converter
AHB	Advanced High-performance Bus
ASIC	Application-Specific Integrated Circuit, refers to all the functional blocks of the processor
CMOS	Complimentary Metal-Oxide Semiconductor
CRC	Cyclic Redundancy Check
DAC	Digital to Analog Converter
DMA	Direct Memory Access
DTE	Data Terminal Equipment
ECC	Error Correction Code
FIFO	First In First Out
GPIO	General Purpose Input/Output
TWI	Two Wire Interface
JTAG	Joint Test Action Group
LCD	Liquid Crystal Display
LSB	Least Significant Bit
MMC	Multimedia Card
MMU	Memory Management Unit
MSB	Most Significant Bit
PCM	Pulse Code Modulation
PGA	Programmable Gain Amplifier
PWM	Pulse-Width Modulator
PLL	Phase Locked Loop
RAM	Random Access Memory
ROM	Read Only Memory
SD	Secure Digital
UART	Universal Asynchronous Receiver/Transmitter
USB	Universal Serial Bus
XTAL	Crystal

# 1 Introduction

AK1056D is an Anyka's highly integrated and cost effective system-on-chip solution based on Bluetooth 5.0/4.2/3.0/2.1+EDR. Positioning at Bluetooth applications such as Bluetooth stereo speakers, earphones, AK1056D satisfies the market with high performance, low cost, and low power consumption.

AK1056D uses ARM926EJ-S core and integrates audio codec, Bluetooth RF, Bluetooth baseband, USB 2.0 Host/Slave controller, SD controller, and power management unit (PMU), and 1MB SPI Flash into a single chip, offering high multimedia performance and high system integration at reduced power consumption and cost of bill-of-materials (BOM). A set of peripheral interfaces, including UART, IrDA, SPI, SD, I2S, TWI, and USB2.0, feature AK1056D with high extensibility and flexibility.

## 1.1 Features

- ARM926EJ-S core, 16KB I cache and 4KB D cache
- Up to 200MHz CPU CLK and 100MHz system operating frequency
- Bluetooth Baseband
- Bluetooth RF
- Advanced power management module
- Supports little-endian only
- Software TWI
- Three ADCs, 2 Sigma-Delta ADC for voice/music recording; 1 SAR ADC for analog keypad, battery measurement, and general purpose
- Two Built-in Sigma-Delta DACs
- Headphone driver output
- Two I2S interfaces
- Three UARTs: UART0, UART1, and UART2 (with hardware flow control)
- Built-in SPI NOR Flash
- One general SPI interface (SPI1), supporting master-slave mode
- One SD interface, compatible with SD 2.0
- One USB2.0 Full-Speed Host & Slave interface
- Supports seven-segment LCD

- 27 GPIOs, 2 dedicated, 25 shared with other pins
- JTAG supporting in-circuit debugging
- On-chip PLL and 32.768KHz RTC
- Six PWM outputs
- Three General Purpose timers
- One Watchdog timer
- Two bootstrap modes: SPI NOR Flash Boot and USB Mass Storage Boot
- Package: 48-pin QFN.

## 1.2 Applications

- Bluetooth stereo speakers
- LED Bluetooth speakers
- Bluetooth speaker smart touch lamp
- Bluetooth stereo earphones
- Bluetooth dialers
- Bluetooth tools

## 1.3 Product Documentation

The following document(s) is (are) required for a complete description of the AK1056D and are necessary to design properly with the device.

- *AK1056D Programmer's Guide*

## 1.4 Ordering Information

PART NUMBER	PACKAGE TYPE	OPERATING VOLTAGE	ORDER NUMBER
AK1056DN048	48-PIN QFN	I/O: 3.3V, core: 1.2V	-

## 1.5 Part Number Information

As shown in Figure 1-1, the Part Number information consists of three lines. The first line symbolizes ANYKA; the second line indicates the product ID, while the third line is production lot number, which is reserved by the producer for specific purposes.

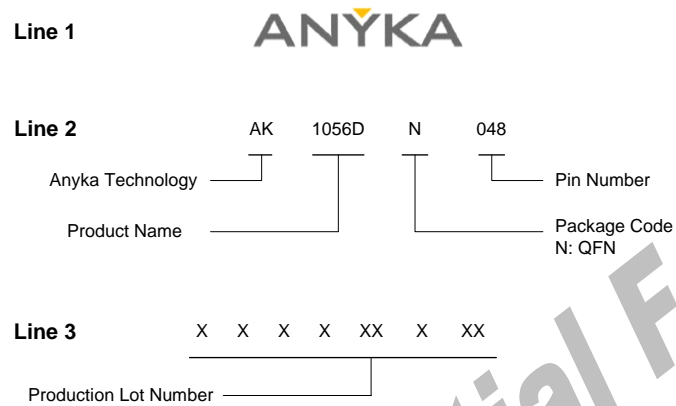


Figure 1-1 Part Number Information

Anyka Confidential For  
Onway Use Only



## 2 Signals and Connections

### 2.1 Pin Definitions

Table 2-1 identifies and describes the AK1056D signals that are assigned to package pins. I: input; O: output; IO: input/output; PWR: power supply; GND: ground; A: analog; D: digital. PU: pull-up; PD: pull-down.

Table 2-1 AK1056D Functional Pin Definitions

PIN	PIN NAME	TYPE	WAKEUP	RESET	PIN MUX	DESCRIPTION
1	VCM3/	IO/A	NO	-	VCM3	3.0V reference voltage for audio codec
	VDD_MIC				3.0V microphone bias output	
2	LineIn_LN/	I/AD	NO	LineIn_LN	LineIn_LN	Line-in left channel input (negative) to ADC3
	GPI[0]				General purpose input port	
3	LineIn_LP/	I/AD	NO	LineIn_LP	LineIn_LP	Line-in left channel input (positive) to ADC3
	GPI[1]				General purpose input port	
4	VCM2/ #RST	IO/A	NO	-	VCM2	1.5V audio codec common mode voltage. It is recommended to connect to a 4.7uF capacitor between this pin and GND
					#RST	Reset pin, active low
5	HP_RP	O/A	NO	-	-	Right channel of headphone output (positive)
6	HP_RN	O/A	NO	-	-	Right channel of headphone output (negative).
7	HP_LN	O/A	NO	-	-	Left channel of headphone output (negative)
8	HP_LP	O/A	NO	-	-	Left channel of headphone output (positive)
9	HPVDD	PWR/A	NO	-	-	3.3V headphone power supply
10	XTAL26MO	O/A	NO	-	-	External 26MHz crystal output
11	XTAL26MI	I/A	NO	-	-	External 26MHz crystal input
12	VDD12_RF	PWR/A	NO	-	-	1.2V Bluetooth RF power supply
13	BT_TX/RX	IO/A	NO	-	-	Bluetooth: radio signal (RX/TX)
14	VCC33_RF	PWR/A	NO	-	-	3.3V Bluetooth RF power supply
15	CHG_GATE/	I/A	YES	CHG_GATE	CHG_GATE	External battery charger control pin
	GPI[4]	I/D			GPI[4]	General purpose input port with wakeup function
16	ISENSE/	I/A	NO	ISENSE	ISENSE	External charge current sense input
	GPIO[30]	IO/D			GPIO[30]	General purpose input/output port
17	ONOFF	I/A	YES	-	-	System on/off signal

PIN	PIN NAME	TYPE	WAKEUP	RESET	PIN MUX	DESCRIPTION
18	VBAT	I/A	NO	-	-	Battery voltage input
19	VIN_CHG	I/A	YES	-	-	Voltage input of battery charger
20	XTAL32KO	O/A	NO	-	-	External 32KHz crystal output
21	XTAL32KI	I/A	NO	-	-	External 32KHz crystal input
22	USB_DM	IO/A	NO	-	-	USB Data pin (Data-)
23	USB_DP	IO/A	NO	-	-	USB Data pin (Data+)
24	VDD33	PWR/A	NO	-	-	3.3V IO power supply
25	VDD12	PWR/A	NO	-	-	1.2V power supply for core and PLL
26	GPIO[26]	IO/D	NO			General purpose input/output port
27	GPIO[8]/ I2S1_MCLK/ PWM3	IO/D	YES	GPIO[8] I/PU	GPIO[8]	General purpose input/output port with wakeup function.
					I2S1_MCLK	I2S1 main clock
					PWM3	Pulse-Width Modulated output signal
28	GPIO[9]/ I2S1_DOUT/ UART2_RXD/ LCD_SEG8/ PWM5	IO/D	YES	GPIO[9] I/PU	GPIO[9]	General purpose input/output port with wakeup function
					I2S1_DOUT	I2S1 serial data output.
					UART2_RXD	Receive pin of UART2
					LCD_SEG8	LCD segment 8
					PWM5	Pulse-Width Modulated output signal
29	GPIO[25]	IO/D	YES			General purpose input/output port with wakeup function
30	GPIO[21]/ UART1_RXD/ LCD_SEG11/ PWM3	IO/D	YES	GPIO[21] I/PU	GPIO[21]	General purpose input/output port with wakeup function
					UART1_RXD	Receive pin of UART1
					LCD_SEG11	LCD segment 11
					PWM3	Pulse-Width Modulated output signal
31	GPIO[6]/ UART0_TXD	IO/D	YES	GPIO[6], I/PU	GPIO[6]	General purpose input/output port with wakeup function. GPIO[6] is specially used as a boot mode select pin during system startup.
					UART0_TXD	Transmit pin of UART0

PIN	PIN NAME	TYPE	WAKEUP	RESET	PIN MUX	DESCRIPTION
32	GPIO[7]/ UART0_RXD/ SPI1_DOUT(IO0)/ IrDA_RX/ I2S0_DOUT/ LCD_SEG5/ PWM1	IO/D	YES	GPIO[7], I/PU	GPIO[7]	General purpose input/output port with wakeup function
					UART0_RXD	Receive pin of UART0
					SPI1_DOUT (IO0)	SPI1 serial data output (serial data input/output 0)
					IrDA_RX	IrDA data input
					I2S0_DOUT	I2S0 serial data output
					LCD_SEG5	LCD segment 5
					PWM1	Pulse-Width Modulated output signal
33	GPIO[11]/ LCD_SEG0/ PWM5/ SPI1_CLK/ I2S0_DIN/ UART2_TXD	IO/D	YES	GPIO[11], I/PU	GPIO[11]	General purpose input/output port with wakeup function
					LCD_SEG0	LCD segment 0
					PWM5	Pulse-Width Modulated output signal
					SPI1_CLK	SPI1 serial clock
					I2S0_DIN	I2S0 serial data input
					UART2_TXD	Transmit pin of UART2
34	GPIO[22]/ I2S0_MCLK/ LCD_SEG3/ SPI1_DIN(IO1)/ UART2_RXD/ PWM3	IO/D	YES	GPIO[22], I/PU	GPIO[22]	General purpose input/output port with wakeup function
					I2S0_MCLK	I2S0 main clock
					LCD_SEG3	LCD segment 3
					SPI1_DIN(IO1)	SPI1 data input (serial data input/output 1)
					UART2_RXD	Receive pin of UART2
					PWM3	Pulse-Width Modulated output signal
35	GPIO[24]/ LCD_SEG1/ PWM0/ SPI1_HOLD (IO3)/ I2S0_BCLK/ UART2_RTS/ AIN1	IO/AD	YES	GPIO[24], I/PD	GPIO[24]	General purpose input/output port with wakeup function
					LCD_SEG1	LCD segment 1
					PWM0	Pulse-Width Modulated output signal
					SPI1_HOLD (IO3)	SPI1 Hold (Serial data input/output 3)
					I2S0_BCLK	I2S0 bit clock

PIN	PIN NAME	TYPE	WAKEUP	RESET	PIN MUX	DESCRIPTION
					UART2_RTS	UART2 "Request To Send" signal
					AIN1	A/D input node for general purpose analog input, it could be used for analog keypad input
36	GPIO[13]/ LCD_SEG2/ PWM2/ SPI1_CS/ I2S0_LRCLK/ JTAG_TDI	IO/D	YES	GPIO[13], I/PU	GPIO[13] LCD_SEG2 PWM2 SPI1_CS I2S0_LRCLK JTAG_TDI	General purpose input/output port with wakeup function LCD segment 2 Pulse-Width Modulated output signal SPI1 chip select I2S0 channel selection JTAG serial data input
37	GPIO[15]/ I2S0_MCLK/ LCD_SEG3/ SPI1_DIN(IO1)/ PWM3/ UART2_RXD	IO/D	YES	GPIO[15], I/PU	GPIO[15] I2S0_MCLK LCD_SEG3 SPI1_DIN(IO1) PWM3 UART2_RXD	General purpose input/output port with wakeup function I2S0 main clock LCD segment 3 SPI1 data input (serial data input/output 1) Pulse-Width Modulated output signal Receive pin of UART2
38	GPIO[12]/ SPI1_WP(IO2)/ LCD_SEG4/ PWM4/ I2S1_DOUT/ #JTAG_RST	IO/D	YES	GPIO[12], I/PU	GPIO[12] SPI1_WP(IO2) LCD_SEG4 PWM4 I2S1_DOUT #JTAG_RST	General purpose input/output port with wakeup function SPI1 Write Protect (Serial data input/output 2) LCD segment 4 Pulse-Width Modulated output signal I2S1 serial data output JTAG logic reset, active low
39	GPIO[17]/ I2S1_DIN/ LCD_SEG9/ PWM2/ JTAG_TCK	IO/D	YES	GPIO[17], I/PU	GPIO[17] I2S1_DIN LCD_SEG9 PWM2 JTAG_TCK	General purpose input/output port with wakeup function I2S1 serial data input LCD segment 9 Pulse-Width Modulated output signal JTAG test clock output

PIN	PIN NAME	TYPE	WAKEUP	RESET	PIN MUX	DESCRIPTION
40	GPIO[1]/ #JTAG_RST/ SD_D[0]/ PWM4	IO/D	NO	GPIO[1], I/PU	GPIO[1]	General purpose input/output port
					#JTAG_RST	JTAG logic reset, active low
					SD_D[0]	SD data line 0
					PWM4	Pulse-Width Modulated output signal
41	GPIO[20]/ I2S1_MCLK/ UART1_TXD/ PWM4/ SD_D[0]/ JTAG_TDO	IO/D	YES	GPIO[20], I/PU	GPIO[20]	General purpose input/output port with wakeup function
					I2S1_MCLK	I2S1 main clock
					UART1_TXD	Transmit pin of UART1
					PWM4	Pulse-Width Modulated output signal
					SD_D[0]	SD data line 0
					JTAG_TDO	JTAG serial data output
42	GPIO[19]/ I2S1_LRCLK/ LCD_SEG11/ PWM5/ SD_CLK/ JTAG_RTCK	IO/D	YES	GPIO[19], I/PU	GPIO[19]	General purpose input/output port with wakeup function
					I2S1_LRCLK	I2S1 channel selection
					LCD_SEG11	LCD segment 11
					PWM5	Pulse-Width Modulated output signal
					SD_CLK	SD operating clock
					JTAG_RTCK	JTAG debug return clock
43	GPIO[14]/ I2S1_BCLK/ LCD_SEG10/ UART2_CTS/ SD_CMD/ JTAG_TMS	IO/D	YES	GPIO[14], I/PU	GPIO[14]	General purpose input/output port with wakeup function
					I2S1_BCLK	I2S1 bit clock
					LCD_SEG10	LCD segment 10
					UART2_CTS	UART2 "Clear to send" signal
					SD_CMD	SD command line
					JTAG_TMS	JTAG test mode select
44	AIN0/ GPIO[10]	I/AD	YES	AIN0	AIN0	A/D input node for general purpose analog input, it could be used for analog keypad input. This pin supports wakeup function.
					GPIO[10]	General purpose input/output port

PIN	PIN NAME	TYPE	WAKEUP	RESET	PIN MUX	DESCRIPTION
45	LineIn_RN/ MIC0_P/ GPI[2]	I/AD	NO	LineIn_RN	LineIn_RN	Line-in right channel input (negative) to ADC2
					MIC0_P	Microphone0 right channel input (positive) to ADC2
					GPI[2]	General purpose input port
46	LineIn_RP/ MIC0_N/ GPI[3]	I/AD	NO	LineIn_RP	LineIn_RP	Line-in right channel input (positive) to ADC2
					MIC0_N	Microphone0 right channel input (negative) to ADC2
					GPI[3]	General purpose input port
47	MIC1_P/ GPI[5]	I/AD	NO	MIC1_P	MIC1_P	Microphone1 left channel input (positive) to ADC3
					GPI[5]	General purpose input port
48	MIC1_N/ GPI[6]	I/AD	NO	MIC1_N	MIC1_N	Microphone1 left channel input (negative) to ADC3
					GPI[6]	General purpose input port
49	GND	GND/D	NO	-	-	Power ground. Connect this pin to the ground on the Printed Circuit Board.

Anyka Confidential For  
Onway Use Only

**Notes:**


1. As shown in the **WAKEUP** column of the table above, YES denotes the corresponding GPIO or dedicated pin is a wakeup pin, which can be applied to wakeup the processor from standby. NO denotes the corresponding pin is not a wakeup pin.
2. The pull-up/pull-down resistance range of GPIOs or specified pins are shown in the following table. The pull-up/pull-down function attached to GPIOs can be enabled / disabled by software.

Table 2-2 Resistance range of pull-up and pull-down pins

PIN NAME	PU/PD	PU/PD RESISTOR
GPIO[1], GPIO[7], GPIO[9], GPIO[13:11], GPIO[15], GPIO[20:22]	PU	70KΩ ± 40%
GPIO[14], GPIO[19]	PU	28KΩ ± 60%
GPI[4]	PU	40K±15%
GPIO[24], GPIO[17]	PU/PD programmable	PU: 70KΩ ±40% PD: 300KΩ ±40%
USB_DP, USB_DM	PU/PD programmable	PU: 1.5K +/- 15% PD: 15K+/- 15%
GPIO[6], GPIO[8], GPIO[25:26],	PU	62KΩ~ 112KΩ

**Note: AINO/GPIO[10] and ISENSE/GPIO[30] are open-drain outputs when they are worked as GPO. In this case, an external pull-up resistor is required to connect to VDD33/VBAT.**

3. Recommended circuit of the 32K crystal:

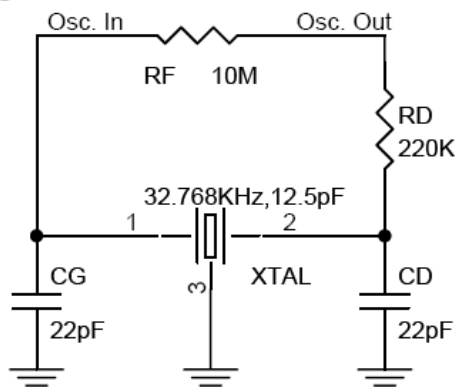

4. Table 2-3 shows the drive strength of GPIOs and SPI pins.

Table 2-3 AK1056D GPIO Drive Strength (3.3V power supply)

PARAMETER	PIN	DRIVE STRENGTH		
		MINIMUM	TYPICAL	MAXIMUM
Low level output current ( $I_{ol}@VOL = 0.4V$ )	GPIO[30] (default as ISENSE), GPIO[10](default as AIN0)	-	-	1.5mA
	GPIO[26:24], GPIO[22:19], GPIO[17], GPIO[15:11], GPIO[9:6], and GPIO[1]	-	6mA	-
	LCD_SEG[11:8], and LCD_SEG[5:0]	-	Seven-segment LCD mode : 26mA  Other modes: 6mA	-
High level output current ( $I_{oh}@VOH = 2.4V$ )	GPIO[30] (default as ISENSE), GPIO[10](default as AIN0)	-	-	1.5mA
	GPIO[26:24], GPIO[22:19], GPIO[17], GPIO[15:11], GPIO[9:6], LCD_SEG[11:8], and LCD_SEG[5:0]	-	10mA	-

Table 2-4 classifies the AK1056D signals according to different modules.

Table 2-4 AK1056D Functional Pin Classification

Module	PIN NAME
<b>1. System Control(5)</b>	ONOFF
	XTAL32KI
	XTAL32KO
	XTAL26MI
	XTAL26MO
<b>2. USB Interface(2)</b>	USB_DM
	USB_DP

Module	PIN NAME
<b>3. Bluetooth(1)</b>	BT_TX/RX
<b>4. SPI(6)</b>	SPI1_CLK
	SPI1_CS
	SPI1_DIN (IO1)
	SPI1_DOUT (IO0)
	SPI1_WP (IO2)
	SPI1_HOLD (IO3)



Module	PIN NAME
<b>5. IrDA(1)</b>	IrDA_RX
<b>6. SD Interface(3)</b>	SD_CLK
	SD_CMD
	SD_D[0]
<b>7. I2S(10)</b>	I2S0_MCLK
	I2S0_BCLK
	I2S0_LRCLK
	I2S0_DIN
	I2S0_DOUT
	I2S1_MCLK
	I2S1_BCLK
	I2S1_LRCLK
	I2S1_DIN
	I2S1_DOUT
<b>8. PWM(6)</b>	PWM[5:0]
<b>9. JTAG(6)</b>	JTAG_TMS
	#JTAG_RST
	JTAG_TDO
	JTAG_RTCK
	JTAG_TCK
	JTAG_TDI
<b>10. GPIO(27)</b>	GPIO[30]
	GPIO[24:26]
	GPIO[19:22]
	GPIO[17]
	GPIO[6:15]
	GPIO[1]
	GPI[6:0]
<b>11. Audio Analog Interface(14)</b>	AIN0
	AIN1

Module	PIN NAME
	HP_LP
	HP_LN
	HP_RN
	HP_RP
	LINEIN_LN
	LINEIN_LP
	LINEIN_RN
	LINEIN_RP
	MIC0_P
	MIC0_N
	MIC1_P
MIC1_N	
<b>12. UART(8)</b>	UART0_TXD
	UART0_RXD
	UART1_TXD
	UART1_RXD
	UART2_CTS
	UART2_RTS
UART2_TXD	
UART2_RXD	
<b>13. PMU (4)</b>	VBAT
	VIN_CHG
	ISENSE
	CHG_GATE
<b>14. Power and Grounds (8)</b>	HPVDD
	VDD12
	VDD33
	VCM3/VDD_MIC
	VCM2
	VDD12RF

Module	PIN NAME
	VCC33_RF

Module	PIN NAME
	GND

## 2.2 Shared-pin List

In order to reduce pin numbers, many pins are shared by more than one function blocks that would not be implemented at the same time. The table below lists the shared pins. All the shared pins are configured by Shared-Pin Control Register.

Table 2-2 AK1056D Shared-pin List

Shared-pin	MODULE	PIN Name	RESET
2	Analog	LineIn_LN	LineIn_LN
	GPIO	GPI[0]	
3	Analog	LineIn_LP	LineIn_LP
	GPIO	GPI[1]	
15	Charger	CHG_GATE	CHG_GATE
	GPI	GPI[4]	
16	Charger	ISENSE	ISENSE
	GPIO	GPIO[30]	
27	GPIO	GPIO[8]	GPIO[8]
	I2S	I2S1_MCLK	
	PWM	PWM3	
28	GPIO	GPIO[9]	GPIO[9]
	I2S	I2S1_DOUT	
	UART	UART2_RXD	
	LCD segment	LCD_SEG8	
	PWM	PWM5	
30	GPIO	GPIO[21]	GPIO[21]
	UART	UART1_RXD	
	LCD segment	LCD_SEG11	
	PWM	PWM3	

Shared-pin	MODULE	PIN Name	RESET
31	GPIO	GPIO[6]	GPIO[6]
	UART	UART0_TXD	
32	GPIO	GPIO[7]	GPIO[7]
	UART	UART0_RXD	
	SPI	SPI1_DOUT(IO0)	
	IrDA	IrDA_RX	
	I2S	I2S0_DOUT	
	LCD segment	LCD_SEG5	
	PWM	PWM1	
33	GPIO	GPIO[11]	GPIO[11]
	LCD segment	LCD_SEG0	
	PWM	PWM5	
	SPI	SPI1_CLK	
	I2S	I2S0_DIN	
	UART	UART2_TXD	
34	GPIO	GPIO[22]	GPIO[22]
	I2S	I2S0_MCLK	
	LCD	LCD_SEG3	
	SPI	SPI1_DIN(IO1)	
	UART	UART2_RXD	
	PWM	PWM3	
35	GPIO	GPIO[24]	GPIO[24]
	LCD segment	LCD_SEG1	
	PWM	PWM0	
	SPI	SPI1_HOLD(IO3)	
	I2S	I2S0_BCLK	
	UART	UART2_RTS	
	SAR ADC	AIN1	
36	GPIO	GPIO[13]	GPIO[13]
	LCD segment	LCD_SEG2	
	PWM	PWM2	

Shared-pin	MODULE	PIN Name	RESET
	SPI	SPI1_CS	
	I2S	I2S0_LRCLK	
	JTAG	JTAG_TDI	
37	GPIO	GPIO[15]	GPIO[15]
	I2S	I2S0_MCLK	
	LCD segment	LCD_SEG3	
	SPI	SPI1_DIN(IO1)	
	PWM	PWM3	
	UART	UART2_RXD	
38	GPIO	GPIO[12]	GPIO[12]
	SPI	SPI1_WP(IO2)	
	LCD segment	LCD_SEG4	
	PWM	PWM4	
	I2S	I2S1_DOUT	
	JTAG	#JTAG_RST	
39	GPIO	GPIO[17]	GPIO[17]
	I2S	I2S1_DIN	
	LCD segment	LCD_SEG9	
	PWM	PWM2	
	JTAG	JTAG_TCK	
40	GPIO	GPIO[1]	GPIO[1]
	JTAG	#JTAG_RST	
	SD	SD_D[0]	
	PWM	PWM4	
41	GPIO	GPIO[20]	GPIO[20]
	I2S	I2S1_MCLK	
	UART	UART1_TXD	
	PWM	PWM4	
	SD	SD_D[0]	
	JTAG	JTAG_TDO	
42	GPIO	GPIO[19]	GPIO[19]

Shared-pin	MODULE	PIN Name	RESET
	I2S	I2S1_LRCLK	
	LCD segment	LCD_SEG11	
	PWM	PWM5	
	SD	SD_CLK	
	JTAG	JTAG_RTCK	
43	GPIO	GPIO[14]	GPIO[14]
	I2S	I2S1_BCLK	
	LCD segment	LCD_SEG10	
	UART	UART2_CTS	
	SD	SD_CMD	
	JTAG	JTAG_TMS	
44	SAR ADC	AIN0	AIN0
	GPIO	GPIO[10]	
45	Analog	LineIn_RN	LineIn_RN
	Analog	MIC0_P	
	GPI	GPI[2]	
46	Analog	LineIn_RP	LineIn_RP
	Analog	MIC0_N	
	GPI	GPI[3]	
47	Analog	MIC1_P	MIC1_P
	GPI	GPI[5]	
48	Analog	MIC1_N	MIC1_N
	GPI	GPI[6]	

### 3 Electrical Specifications

#### 3.1 Maximum Ratings

Stresses greater than those listed may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification are not implied. Exposure to absolute maximum rating conditions for extended period may affect reliability.

Table 3-1 AK1056D Maximum Ratings

PARAMETER	SYMBOL	MINIMUM	MAXIMUM	UNIT
VDD12 supply voltage relative to GND	VDD12	-0.3	1.4	V
VDD33 supply voltage relative to GND	VDD33	-0.3	4.0	V
AVDD_MIC supply voltage relative to GND	AVDD_MIC	-0.3	4.0	V
AVCC_USB supply voltage relative to GND	AVCC_USB	-0.3	4.0	V
AVCC supply voltage relative to GND	AVCC	-0.3	4.0	V
HPVDD supply voltage relative to GND	HPVDD	-0.3	4.0	V
VDD12_RF supply voltage relative to GND	VDD12_RF	-0.3	1.4	V
VCC33_RF supply voltage relative to GND	VCC33_RF	-0.3	4.0	V
VBAT supply voltage relative to GND	VBAT	-0.3	4.5	V
VIN_CHG supply voltage relative to GND	VIN_CHG	-0.3	5.5	V
Storage Temperature	T <sub>s</sub>	-40	125	°C

#### 3.2 Recommended Operating Range

Table 3-2 Recommended Operating Range

PARAMETER	SYMBOL	MINIMUM	TYPICAL	MAXIMUM	UNIT
VDD12 supply voltage relative to GND	VDD <sup>2</sup>	1.08	1.2	1.35	V

PARAMETER	SYMBOL	MINIMUM	TYPICAL	MAXIMUM	UNIT
VDD33 supply voltage relative to GND	VDD33	2.97	3.30	3.63	V
AVDD_MIC supply voltage relative to GND	AVDD_MIC	2.97	3.0	3.63	V
VCCA_USB supply voltage relative to GND	VCCA_USB	2.97	3.30	3.63	V
AVCC supply voltage relative to GND	AVCC	2.85	3.0	3.1	V
HPVDD supply voltage relative to GND	HPVDD	3.2	3.3	3.6	V
VDD12_RF supply voltage relative to GND	VDD12_RF	1.15	1.3	1.4	V
VCC33_RF supply voltage relative to GND	VCC33_RF	2.8	3.0	3.30	V
VBAT supply voltage relative to GND	VBAT	3.5	-	4.5	V
VIN_CHG supply voltage relative to GND	VIN_CHG	3.5	-	5.0	V
Operating Temperature Range	T <sub>o</sub>	0	-	75	°C

**Notes:**

1. In normal mode, the recommended operating range of VDD12 is given in the table.
2. In standby mode, VDD12 is recommended to set as 1.1V to save power.

### 3.3 Electrical Characteristics of PMU

Table 3-3 Electrical Characteristics of LDO12

Typical values are at T<sub>A</sub> = +27°C and all Current Values are dynamic, unless other-wise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V <sub>in</sub>	Input voltage	-	2.5	3.3	3.7	V
V <sub>out</sub> (accuracy)	Output voltage	Default	-3	-	+3	%
V <sub>out</sub>	Output voltage	-	-	1.2	1.35	V
I <sub>out</sub>	Output current	-	-	100	150	mA
Δ V <sub>out</sub> ,	Load regulation	T=27 °C, V <sub>in</sub> =3.3V,	-	38	-	mV

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$\Delta V_{out}/\Delta I_{out}$		@ $I_{out}=1$ to 100mA	-	330	-	m $\Omega$
$\Delta V_{out}$ , $\Delta V_{out}/\Delta V_{in}$	Line regulation	$I_{out}=1$ mA	-	3	-	mV
		@ $V_{in}=3.0$ V to 3.7V	-	0.2	-	%
		$I_{out}=100$ mA	-	8	-	mV
		@ $V_{in}=3.0$ V to 3.7V	-	0.5	-	%
$I_{cc}$	$V_{in}$ Quiescent Current	No load	-	50	-	$\mu$ A
$I_{pd}$	Power-down current	-	-	0.1	-	$\mu$ A

Table 3-4 Electrical Characteristics of LDO33

Typical values are at  $T_A = +27^\circ\text{C}$  and all Current Values are dynamic, unless other-wise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{in}$	Input voltage	-	3.5	3.7	5.0	V
$V_{out}$ (accuracy)	Output voltage	Default	-3	-	+3	%
$V_{out}$	Output voltage	-	-	3.3	-	V
$I_{out}$	Output current	-	-	-	250	mA
$\Delta V_{out}$ , $\Delta V_{out}/\Delta I_{out}$	Load regulation	$T=27^\circ\text{C}$ , $V_{in}=3.8$ V,	-	40	-	mV
		@ $I_{out}=1$ to 100mA	-	340	-	m $\Omega$
$\Delta V_{out}$ , $\Delta V_{out}/\Delta V_{in}$	Line regulation	$I_{out}=1$ mA	-	3	-	mV
		@ $V_{in}=3.5$ to 5V	-	0.2	-	%
		$I_{out}=250$ mA	-	10	-	mV
		@ $V_{in}=3.5$ to 5V	-	0.5	-	%
$I_{cc}$	$V_{in}$ Quiescent Current	No load	-	50	-	$\mu$ A
$I_{pd}$	Power-down current	-	-	0.1	-	$\mu$ A



Table 3-5 Electrical Characteristics of LDO33RF

Typical values are at  $T_A = +27^\circ\text{C}$  and all Current Values are dynamic, unless other-wise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Vin	Input voltage	-	3.2	3.8	4.5	V
Vout (accuracy)	Output voltage	Default	-3	-	3	%
Vout	Output voltage	-	-	3.0	-	V
Iout	Output current	-	-	50	80	mA
$\Delta V_{out}$ , $\Delta V_{out}/\Delta I_{out}$	Load regulation	T=27 °C, Vin=3.8V, @Iout=1 to 50mA	-	10	-	mV
			-	500	-	mΩ
$\Delta V_{out}$ , $\Delta V_{out}/\Delta V_{in}$	Line regulation	Iout=1mA	-	5	-	mV
		@Vin=3.8 to 4.5V	-	0.2	-	%
		Iout = 50mA @Vin=3.8V to 4.5V	-	20	-	mV
			-	0.5	-	%
Icc	Vin Quiescent Current	No load	-	50	-	μA
Ipd	Power-down current	-	-	0.1	-	μA

Table 3-6 Electrical Characteristics of LDO12RF

Typical values are at  $T_A = +27^\circ\text{C}$  and all Current Values are dynamic, unless other-wise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Vin	Input voltage	-	2.5	3.3	3.7	V
Vout (accuracy)	Output voltage	Default	-3	-	3	%
Vout	Output voltage	-	1.1	1.3	1.4	V
Iout	Output current	-	-	80	100	mA
$\Delta V_{out}$ , $\Delta V_{out}/\Delta I_{out}$	Load regulation	T=27 °C, Vin=3.8V, @Iout=1 to 100mA	-	38	-	mV
			-	330	-	mΩ
$\Delta V_{out}$ , $\Delta V_{out}/\Delta V_{in}$	Line regulation	Iout=1mA	-	3	-	mV
		@Vin=3.3 to 3.7V	-	0.2	-	%
		Iout=100mA	-	8	-	mV

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
		@Vin=3.3V to 3.7V	-	0.5	-	%
I <sub>cc</sub>	Vin Quiescent Current	No load	-	50	-	μA
I <sub>pd</sub>	Power-down current	-	-	0.1	-	μA

### 3.4 DC Electrical Characteristics

Table 3-7 DC Electrical Characteristics

PARAMETER	SYMBOL	MINIMUM	TYPICAL	MAXIMUM	UNIT
Input High Voltage	V <sub>IH</sub>	2.0	-	VDD33+0.3	V
Input Low Voltage	V <sub>IL</sub>	-0.3	-	0.8	V
Output High Voltage	V <sub>OH</sub>	2.4	-	-	V
Output Low Voltage	V <sub>OL</sub>	-	-	0.4	V
Input Leakage Current	I <sub>L</sub>	-	-	±1	μA
Tri-state Output Leakage Current	I <sub>OZ</sub>	-	-	±1	μA
Input capacitance	C <sub>I</sub>	-	-	8	pF
Output capacitance	C <sub>O</sub>	-	-	8	pF
Analog Line in Resistance	R <sub>L</sub>	-	18K	-	Ω
Microphone Input Resistance	R <sub>mic</sub>	-	5K	-	Ω
Headphone output load resistance	R <sub>HP</sub>	-	32	-	Ω

### 3.5 AC Electrical Characteristics

Table 3-8 32K/26M Oscillator Signal Timing

PARAMETER	MIN.	TYP.	MAX.	UNIT
XTAL32K Startup Time	-	500	-	ms
XTAL26M Startup Time	-	8	-	ms

### 3.6 Bluetooth RF Characteristics

Table 3-9 RF TX Characteristics

PARAMETER	UNIT	MIN..	TYP.	MAX.	REFERENCE
Output Power	dBm	-3	2	6	-
Power Control	dB	-	24	-	>=16
Frequency Range	GHz	2.4	-	2.4835	2.4~2.4835
Initial Carrier Frequency Tolerance	KHz	-50	-	50	-75~75
Carrier Frequency Drift	KHz/50us	-	5	20	<=20

Table 3-10 RF RX Characteristics

PARAMETER	UNIT	MIN.	TYP.	MAX.	REFERENCE
Sensitivity	dBm	-	-80	-	<=-70
Maximum Input Level	dBm	-20	-	-	>=-20

### 3.7 Analog Interface Characteristics

Table 3-11 Analog Interface Characteristics

PARAMETER	SYMBOL	MINIMUM	TYPICAL	MAXIMUM	UNIT
Analog Line in Resistance	R <sub>L</sub>	6.3K	18K	30K	Ω
Microphone Input Resistance	R <sub>mic</sub>	-	5K	-	Ω
Headphone output load resistance	R <sub>HP</sub>	-	External connected	-	Ω

### 3.8 Power-down and Sniff Supply Current

Table 3-12 Power-down and Sniff Supply Current

PARAMETER	MINIMUM	TYPICAL	MAXIMUM	UNIT
Supply current in power down mode (RTC module is powered off)	-	0	-	μA
Supply current in power down mode	-	20	-	μA

PARAMETER	MINIMUM	TYPICAL	MAXIMUM	UNIT
(RTC module is powered on)				
Supply current in sniff mode	-	1	-	mA

**Notes:**

1. Power-down: RTC module can be configured to be powered on by 3.3V voltage or powered off, while all the other modules are powered off.


2. Sniff: If Bluetooth module works in deep-sleep state of the sniff interval, the PLL is powered down and other modules (including CPU core) are clocked off. If Bluetooth module works in wakeup state of the sniff interval, Bluetooth module manages data transmission between slaves and masters, while other modules are clocked off.

Anyka Confidential For  
Onway Use Only





## 4 Package Information

AK1056D is packaged in a 48-pin QFN with 6mm x 6mm x 0.85mm.

### 4.1 Pin Assignment

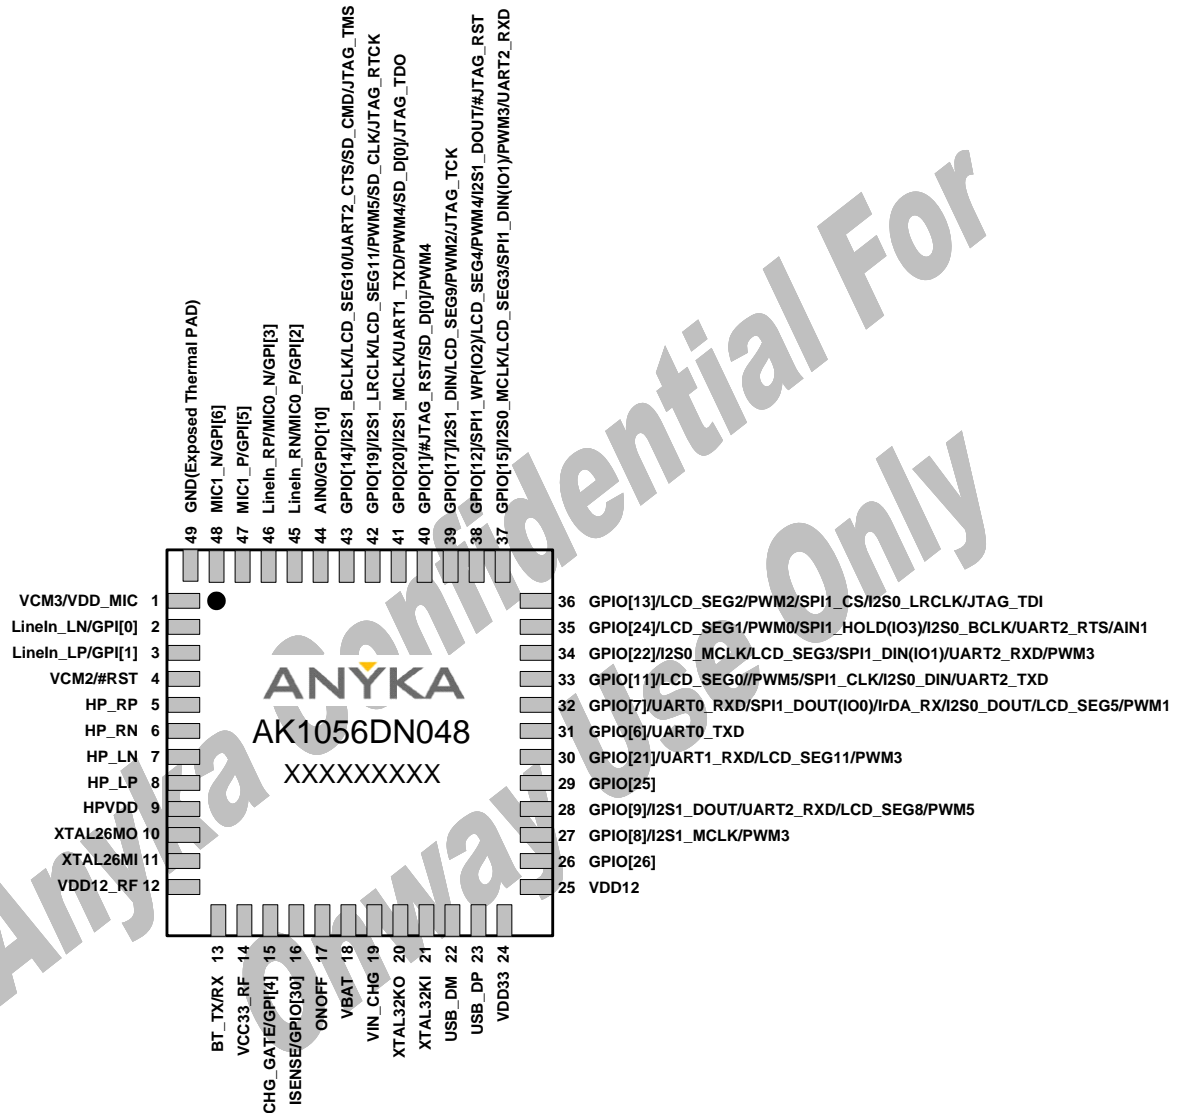

## 4.2 Package Information

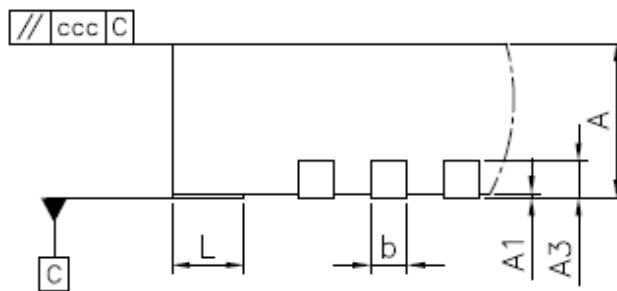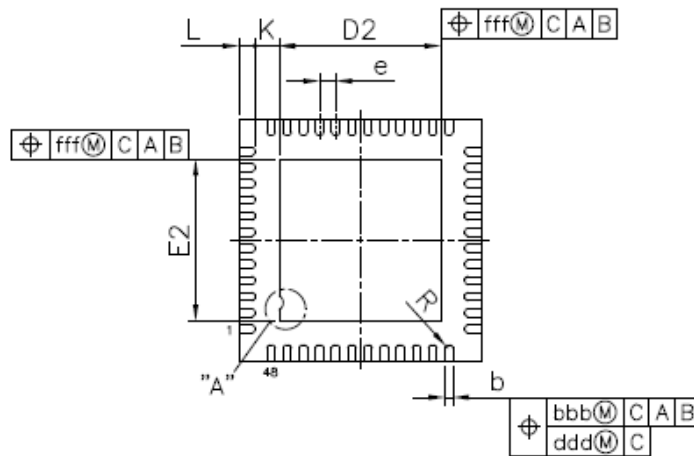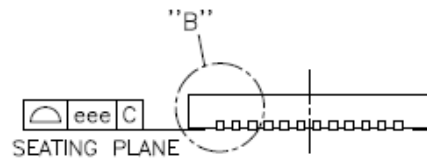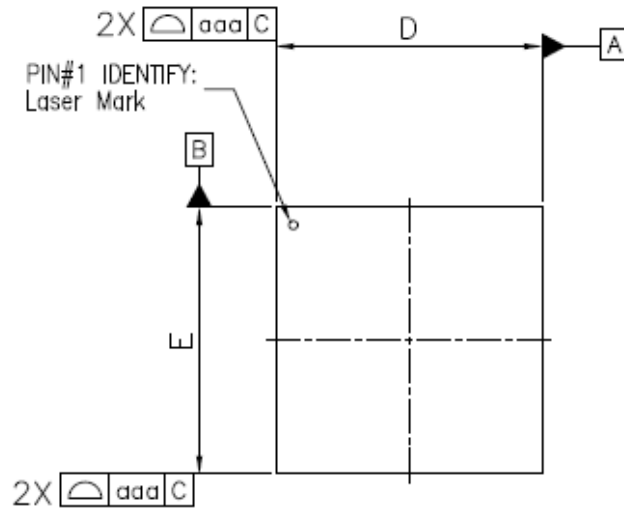

DETAIL : "B"

Symbol	DIMENSION (millimeter)		
	MIN	NOM	MAX
A	0.80	0.85	0.90
A1	0.00	0.02	0.05
A3	0.20REF		
b	0.15	0.20	0.25
D/E	5.90	6.00	6.10
D2/E2	3.85	4.00	4.15
e	0.40 BSC		
L	0.30	0.40	0.50
K	0.20	-	-
R	0.075	-	-
aaa	0.10		
bbb	0.07		
ccc	0.10		
ddd	0.05		
eee	0.08		
fff	0.10		

Anyka Confidential For  
Onway Use Only

## 5 Reflow Profile

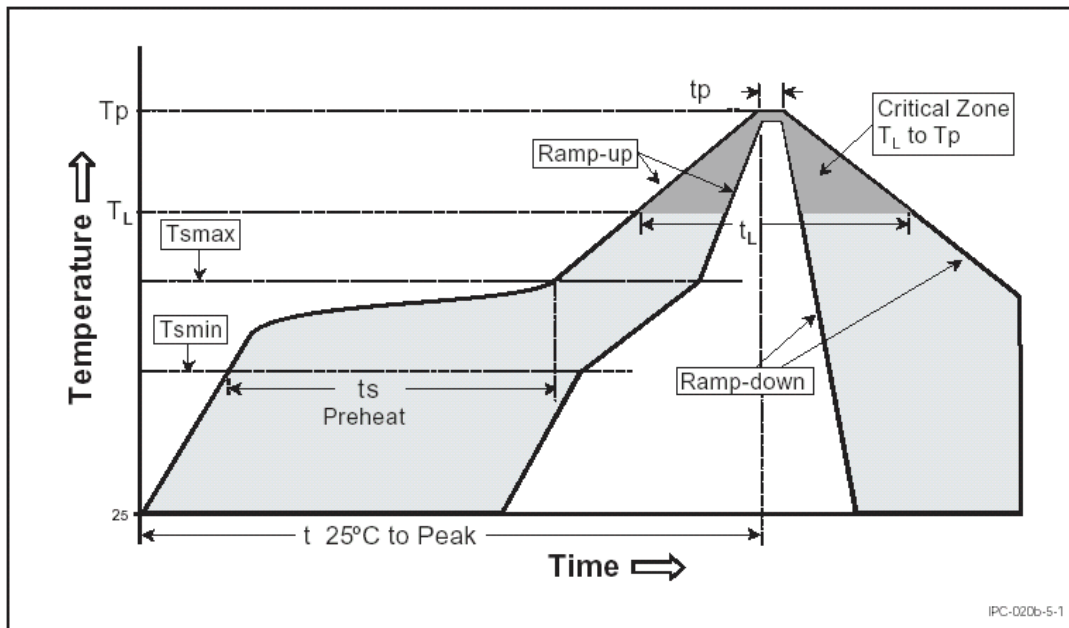


Figure 5-1 Recommended Reflow Profile

Table 5-1 Reflow Profile Condition

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T <sub>smax</sub> to T <sub>p</sub> )	2 °C/second max
Preheat -Temperature Min(T <sub>smin</sub> ) -Temperature Max(T <sub>smax</sub> ) -Time (min to max) (t <sub>s</sub> )	150 °C 200 °C 60 - 180 seconds
Time maintained above: -Temperature (T <sub>L</sub> ) -Time (t <sub>L</sub> )	217 °C 60 - 150 seconds
Peak Temperature (T <sub>p</sub> )	245+5/-5 °C
Time within 5°C of actual Peak Temperature(t <sub>p</sub> )	30 seconds max
Ramp-down Rate	3°C/second max



Profile Feature	Pb-Free Assembly
Time 25°C to Peak Temperature	8 minutes max

**Note:** All temperatures refer to topside of the package, measured on the package body surface.

Anyka Confidential For  
Onway Use Only

## 6 Storage and Baking

1. Shelf life in sealed bag: 12 months at  $< 30^{\circ}\text{C}$  and  $< 60\%$  relative humidity (RH).
2. After bag is opened, device that will be subjected to reflow solder or other high temperature process must be:
  - a) Mounted within: 168 hours of factory conditions  $< 30^{\circ}\text{C}/60\%$  RH or
  - b) Stored at  $< 20\%$  RH.
3. Devices require bake, before mounting, if:
  - a) Humidity indicator card reads  $\geq 20\%$  when read at  $25\pm 5^{\circ}\text{C}$ ;
  - b) 2a or 2b are not met.
4. If baking is required, device may be baked for 12 hours at  $125^{\circ}\text{C}\pm 5^{\circ}\text{C}$ .

Anyka Confidential For  
Onway Use Only

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Transceiver](#) category:*

*Click to view products by [NYKA](#) manufacturer:*

Other Similar products are found below :

[ATA5428C-PLQW-1](#) [ATA8520-GHPW](#) [XR1019-QH-0G0T](#) [AX5043-1-TW30](#) [MAX7043EUI](#) [ATA5428C-PLQW-1](#) [MAX2510EEI+T](#)  
[AX5051-1-TW30](#) [ADRV9026-HB/PCBZ](#) [ADRV9026-MB/PCBZ](#) [BGT24LTR22E6327XTSA1](#) [ADL6316ACCZ](#) [ADL6316ACCZ-R7](#)  
[ADL6317ACCZ](#) [SX1268DVK1GAS](#) [MC13213R2](#) [CC1260RGZT](#) [NRF51822-CEAA-R \(E0\)](#) [CC2590RGVR](#) [USB3317-GJ-TR](#) [USB3311-GJ-](#)  
[TR](#) [MAX7030HATJ+T](#) [MAX2831ETM+](#) [MAX2830ETM+](#) [MAX2829ETN+](#) [MAX2828ETN+](#) [BH1406KV-E2](#) [SX1232BIMLTRT](#) [XBP24-](#)  
[API-080](#) [ADF7242BCPZ-RL](#) [MAX2831ETM](#) [S2-LPQTR](#) [MAX7037EGL+](#) [ESP32-D0WDQ6](#) [ESP8266EX](#) [TRF2443IPFP](#) [CC8530RHAR](#)  
[ADF7021-NBCPZ-RL](#) [CC1201RHBR](#) [TLE9221SXXUMA2](#) [TC35675XBG-001\(EL\)](#) [DA14585-00000AT2](#) [SX1281IMLTRT](#) [TC35661SBG-](#)  
[501,EL](#) [ADS62PF49IRGCT](#) [TC32306FTG,EL](#) [NRF51822-QFAC-R](#) [CC1310F128RHBR](#) [AT86RF215IQ-ZUR](#) [A7108](#)