


FRS1 RELAY



Subminiature SPDT RELAY

FEATURES

- Low coil power consumption
- Small size and low cost
- PCB mounting, DIL pitch terminal
- Standard and high sensitive operation use
- Dust cover or sealed type



  Recognized File No: E141516(N)

SPECIFICATIONS

COIL RATING

RATED VOLTAGE (V DC)	COIL RESISTANCE Ω +/- 10 %			MUST OPERATE VOLTAGE	MUST DROPOUT VOLTAGE	MAXIMUM VOLTAGE	POWER CONSUMPTION (W)
	FRS1(K)B	FRS1(K)	FRS1(K)H	% OF RATED VOLTAGE (AT +20°C)			
3	20	25	45	75 Max.	10 Min.	110 Max.	FRS1(K)B: 0.45 FRS1(K) : 0.36 FRS1(K)H: 0.20
5	56	70	120				
6	80	100	180				
9	180	220	400				
12	320	400	700				
24	1280	1600	2800				

CHARACTERISTICS

Contact Arrangement	1 Form C (SPDT)
Contact Material	Silver Alloy (Gold Flash)
Contact Resistance	50m Ω Max.
Contact Rating (Resistive Load)	1A 125VAC / 30VDC 2A 125VAC / 30VDC 3A 125VAC / 30VDC 5A 125VAC / 30VDC (Only available for "B" type -- 0.45W)
Switching Voltage	DC60V Max. AC220V Max.
Operate Time (Initial)	5ms Max.
Release Time (Initial)	5ms Max.
Insulation Resistance	100M Ω Min. (500V DC)
Dielectric Strength	500Vrms, 1 minute between open contacts 500Vrms, 1 minute between coil and contact
Shock Resistance	10g Approx.
Vibration	10-55Hz, Double Amplitude 1.5mm
Ambient Temperature	-25°C to +75°C
Operation Life	Mechanical : 10 ⁷ Electrical : 10 ⁵
Weight	4g Approx.

[Specifications are subject to change without notices.]

FORWARD INDUSTRIAL COMPANY. (O/B COMMERCIAL UNION LTD)

RM. 1405, Wu Sang House, 655 Nathan Road, Mongkok, Kowloon, Hong Kong.


TEL : (852) 27892365 FAX : (852) 27893102 E-MAIL : sales@ficrelay.com.hk WEBSITE : http://www.ficrelay.com.hk

FRS1 RELAY



ORDERING INFORMATION

FRS1 H - S 3 - DC12V

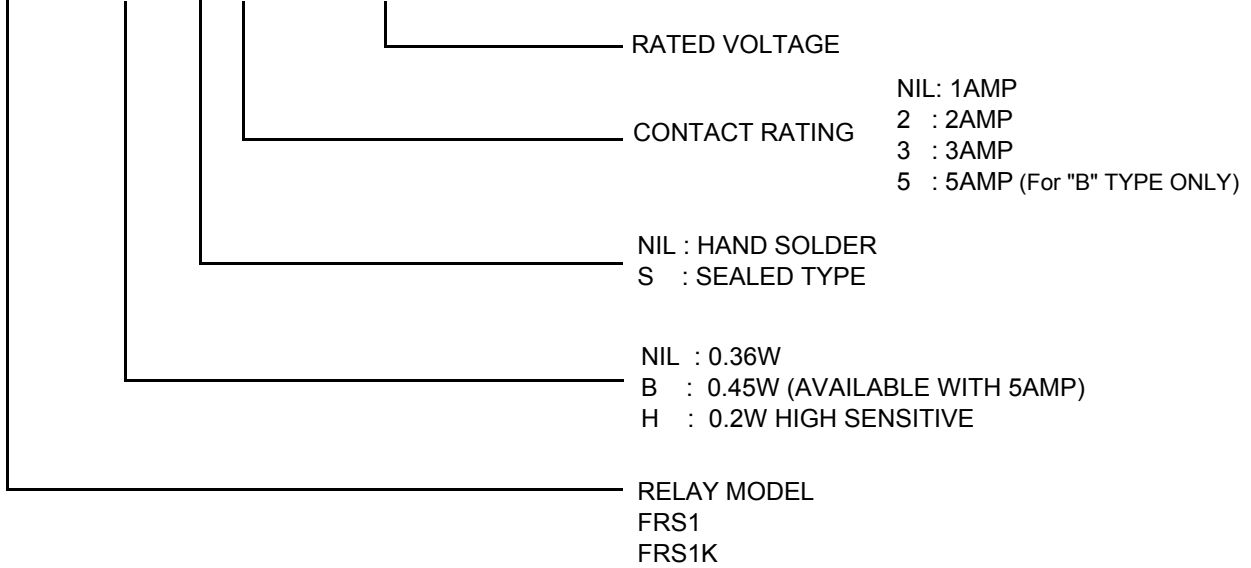

Note : Pb-Free and RoHS compliant relays are available.


For ordering, please add suffix "Pb-Free" or "RoHS" to standard relay part numbers.

For example : FRS1-S3 DC 12V "Pb-Free" for Pb-Free Relay


For example : FRS1-S3 DC 12V "RoHS" for RoHS Compliance Relay

DIMENSIONS (UNIT:mm)


FRS1

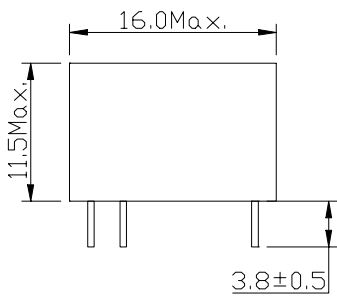


MOUNTING HOLES

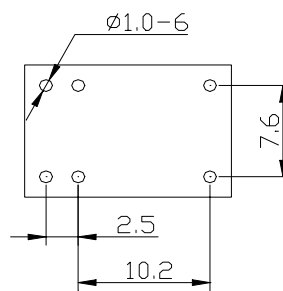


TERMINAL ARRANGEMENT (BOTTOM VIEW)




FRS1K

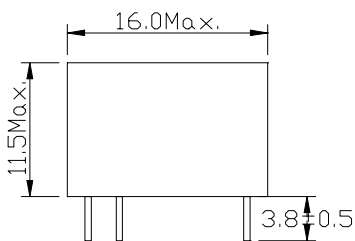

MOUNTING HOLES

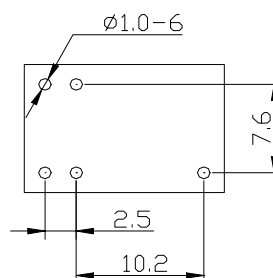

TERMINAL ARRANGEMENT (BOTTOM VIEW)



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Forward](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)