


1. BASE
2. EMITTER
3. COLLECTOR

FEATURES

- Epitaxial planar die construction.
- Complementary PNP type available MMBT2907A.
- Ultra-small surface mount package.

APPLICATIONS

- Use as a medium power amplifier.
- Switching requiring collector currents up to 500mA.

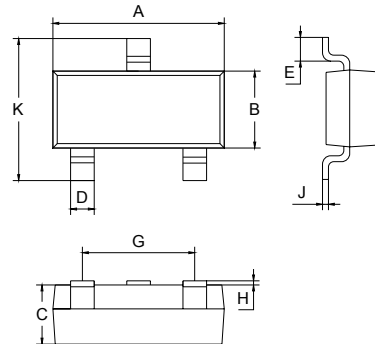

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	1.0 Typical	
D	0.4 Typical	
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.1 Typical	
K	2.20	2.60
All Dimensions in mm		

ORDERING INFORMATION

Type No.	Marking	Package Code
MMBT2222ALT1	1P	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified


Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	75	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	600	mA
P_C	Collector Dissipation	300	mW
$R_{\theta JA}$	Thermal resistance junction to ambient	417	°C/W
T_j, T_{stg}	Junction and Storage Temperature	-55 to +150	°C

ESD RATING


Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	400	V	C

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	75			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	40			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB}=60V, I_E=0$			0.01	μA
Collector cut-off current	I_{CEX}	$V_{CE}=60V, V_{BE}=-3.0V$			0.01	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=3V, I_C=0$			0.01	μA
DC current gain	h_{FE}	$V_{CE}=10V, I_C=150mA$	100		300	
		$V_{CE}=10V, I_C=0.1mA$	35			
		$V_{CE}=10V, I_C=1.0mA$	50			
		$V_{CE}=10V, I_C=10mA$	75			
		$V_{CE}=10V, I_C=500mA$	40			
		$V_{CE}=1V, I_C=150mA$	50			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=500mA, I_B=50mA$ $I_C=150mA, I_B=15mA$			1.0 0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=500mA, I_B=50mA$ $I_C=150mA, I_B=15mA$		0.6	2.0 1.2	V
Transition frequency	f_T	$V_{CE}=20V, I_C=20mA$ $f=100MHz$	300			MHz
Output capacitance	C_{obo}	$V_{CB}=10V, I_E=0, f=1.0MHz$		8.0		pF
Input capacitance	C_{ibo}	$V_{EB}=0.5V, I_C=0,$ $f=1.0MHz$		25		pF
Delay time	t_d	$V_{CC}=30V, V_{BE(off)}=-0.5V$			10	ns
Rise time	t_r	$I_C=150mA, I_{B1}=15mA$			25	ns
Storage time	t_s	$V_{CC}=30V, I_C=150mA$			225	ns
Fall time	t_f	$I_{B1}=-I_{B2}=15mA$			60	ns

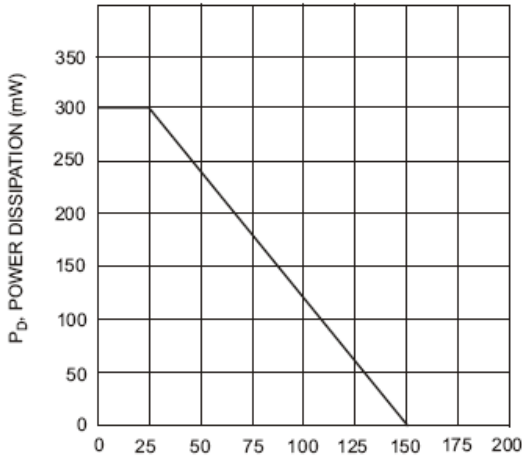TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified


T_A: AMBIENT TEMPERATURE (°C)
Fig. 1 Max Power Dissipation vs Ambient Temperature

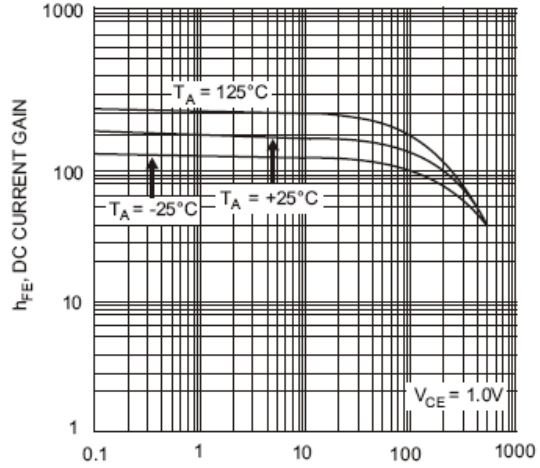

I_C, COLLECTOR CURRENT (mA)
Fig. 2 Typical DC Current Gain vs Collector Current



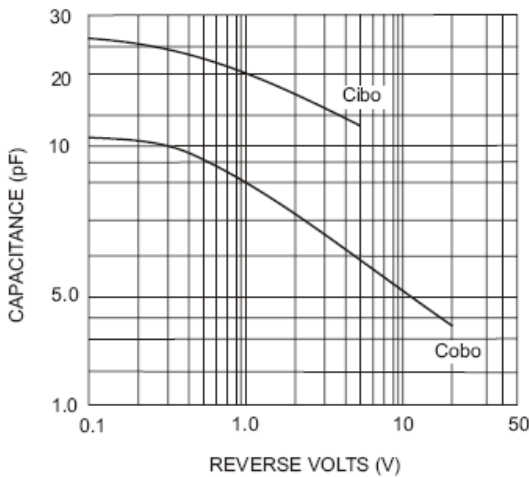



Fig. 3 Typical Capacitance

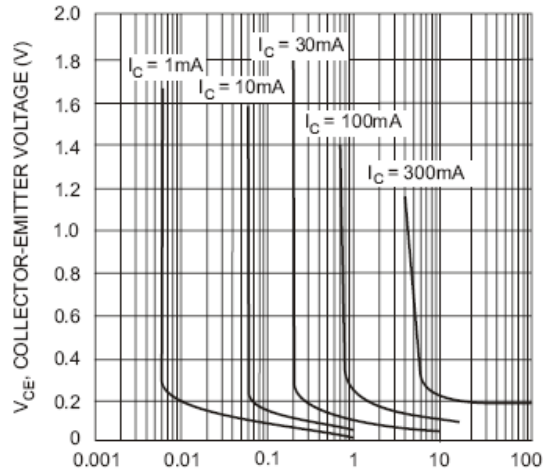

I_B, BASE CURRENT (mA)
Fig. 4 Typical Collector Saturation Region

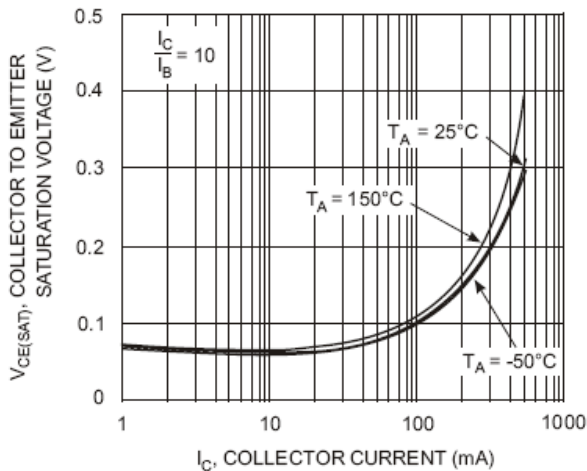

I_C, COLLECTOR CURRENT (mA)
Fig. 5 Collector Emitter Saturation Voltage vs. Collector Current

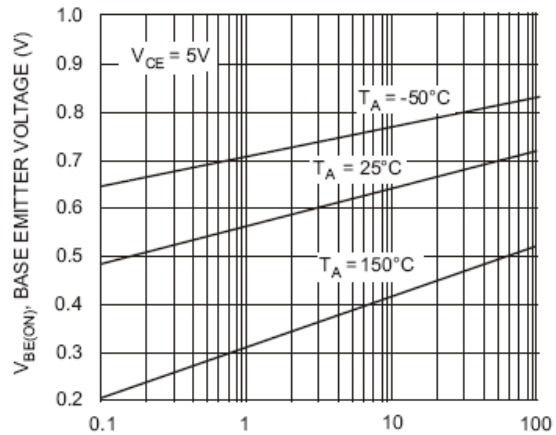

I_C, COLLECTOR CURRENT (mA)
Fig. 6 Base Emitter Voltage vs. Collector Current

Device	Package	Shipping
MMBT2222ALT1	SOT-23	3000/Tape&Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [LGE manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)