

Drum Core Surface Mount Unshielded Power Inductors

◆ Features

1. Excellent solderability and high heat resistance.
2. Excellent terminal strength construction.
3. Packed in embossed carrier tape and can be used by automatic mounting machine.




◆ Applications

Power supply for VCR,OA equipment ,LCD television set notebook, DC to DC converters, DC to AC inverters etc.



◆ Shape & Dimensions

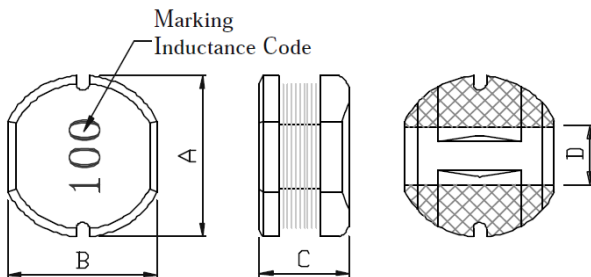

◆ Lead Free Part Numbering

CMLF 0403 - 100 M T T


(1) (2) (3) (4) (5) (6)

- (1) Series Type
- (2) Dimension: A X C
- (3) Inductance: 2R2=2.2 μ H ;
100=10 μ H; 101=100 μ H
- (4) Inductance Tolerance: K= \pm 10%, M= \pm 20%
- (5) Company Code
- (6) Packaging : packed in embossed carrier tape

Series	A (mm)	B (mm)	C (mm)	D (mm)
CMLF0403	4.5 \pm 0.3	4.0 \pm 0.3	3.2 \pm 0.3	1.2 Typ.

◆ Material

Item	Material
a. Core	Ferrite DR Core
b. Wire	Enamelled Copper wire
c. Terminal	Ag+Sn+SnPb

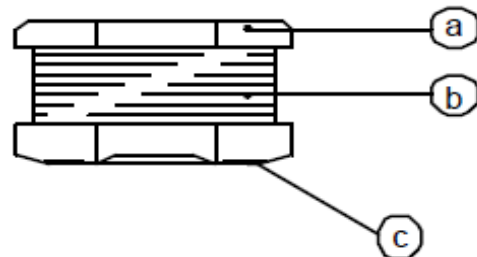

◆ Specification

Part Number	Inductance (μH)	DCR (Ω) max.	IDC (A) max.
CMLF0403 Series:			
CMLF0403-1R0MTT	1.00±20%	0.033	3.80
CMLF0403-1R8MTT	1.80±20%	0.042	2.91
CMLF0403-2R2MTT	2.20±20%	0.047	2.60
CMLF0403-3R3MTT	3.30±20%	0.058	2.15
CMLF0403-3R9MTT	3.90±20%	0.076	1.98
CMLF0403-4R7MTT	4.70±20%	0.094	1.70
CMLF0403-5R6MTT	5.60±20%	0.101	1.60
CMLF0403-6R8MTT	6.80±20%	0.117	1.41
CMLF0403-8R2MTT	8.20±20%	0.132	1.26
CMLF0403-100MTT	10.0±20%	0.182	1.15
CMLF0403-120MTT	12.0±20%	0.210	1.05
CMLF0403-150MTT	15.0±20%	0.235	0.92
CMLF0403-220MTT	22.0±20%	0.378	0.76
CMLF0403-330MTT	33.0±20%	0.540	0.64
CMLF0403-390MTT	39.0±20%	0.587	0.59
CMLF0403-470MTT	47.0±20%	0.844	0.54
CMLF0403-560MTT	56.0±20%	0.937	0.50
CMLF0403-680MTT	68.0±20%	1.117	0.46
CMLF0403-820MTT	82.0±20%	1.345	0.45
CMLF0403-101KTT	100.0±10%	1.520	0.44
CMLF0403-121KTT	120.0±10%	1.800	0.43
CMLF0403-151KTT	150.0±10%	2.000	0.42
CMLF0403-181KTT	180.0±10%	3.200	0.38
CMLF0403-221KTT	220.0±10%	3.400	0.36
CMLF0403-271KTT	270.0±10%	3.900	0.34
CMLF0403-331KTT	330.0±10%	5.300	0.28
CMLF0403-391KTT	390.0±10%	5.900	0.24
CMLF0403-471KTT	470.0±10%	6.800	0.21
CMLF0403-561KTT	560.0±10%	8.500	0.20
CMLF0403-681KTT	680.0±10%	10.000	0.18
CMLF0403-821KTT	820.0±10%	13.400	0.15

◆ **Note**

- (1) Inductance is measured by LCR-meter 4284A/4286A (HP) or equivalent.
- (2) Inductance test condition: CMLF0504: $1.0\mu\text{H}\sim 8.2\text{H}$: $7.96\text{MTTHz}/0.5\text{V}$,
 $10.0\mu\text{H}\sim 82.0\mu\text{H}$: $2.52\text{MTTHz}/0.5\text{V}$, More than $100.0\mu\text{H}$ at $1.0\text{KTTHz}/1.0\text{V}$.
- (3) DC Resistance is measured by HP4338B Milliohms Meter or equivalent.
- (4) Rated current is measured by LCR-meter 3260B (WK) & DC Bias 3265B(WK) at $1.0\text{KTTHz}/1.0\text{V}$.
- (5) Maximum allowable DC current is that which causes a 10% inductance reduction from the initial value, or coil temperature to rise by 40°C , whichever is smaller. (Reference ambient temperature 20°C).
- (6) Operating temperature $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$.
- (7) All test data is referenced to 25°C ambient.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Cybermax](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)