

## MAGNETIC TRANSDUCER

Customer	
Customer P/O	
BeStar Model Name	BMT1212H09
Product No.	010406
Issue No.	BS/TET01.016A
Issue Date	02/07/01

### Approval :

- 1.Characteristic
- 2.Drawing
- 3.Reliability Test
- 4.Packing



**BESTAR ELECTRONICS INDUSTRY CO.,LTD**  
TianAn Industry Park4/F,Site B ChangZhou New District  
Tel:86-519-5103228  
Fax:86-519-5131010  
Http:www.be-star.com  
E-Mail:bestarco@pub.cz.jsinfo.net

## BMT1212H09




### 1. Characteristic

#### ★ Electrical and Mechanical Characteristics

No.	Item	Specification
1.	Rated Voltage	12 V
2.	Operating Voltage	7...16V
3.	a) Rated Current	max 40mA
4.	Coil Resistance	140 ± 14ohm
5.	b) Coil Impedance	240ohm
6.	a) Sound Output at10cm	min 85 dB
7.	Resonance Frequency	2400 ± 200Hz
8.	Housing Material	NORYL
9.	Working Temperature	-40...+85 °C
10.	Storage Temperature	-40...+85 °C
	a) Value applying at rated voltage (2400Hz,1/2duty square wave)	
	b) Value applying at rated voltage (2400Hz,sine wave measuring current 60 μ A)	

#### ★ Standard Output Measurement Setup

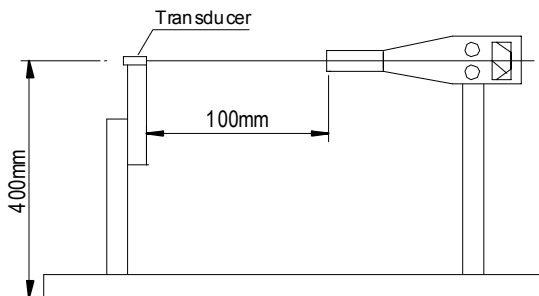

#### Standard Conditions

Temperature: 17~25°C  
 Relative Humidity: 45~85 %(RH)  
 Air Pressure: 860~1060hPa


DIS.	DATE	Page:1 of 4	BMT1212H09
CHEC.	DATE	3rd angle projection	
APPR.	DATE	Transducer	
<b>BESTAR ELECTRONICS INDUSTRY CO.,LTD</b> TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com			DRG NO BS/TET01.016A

This print and information therein are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content No.010-406


## BMT-1212H09

### 2. Drawing

Tolerance:  $\pm 0.5$

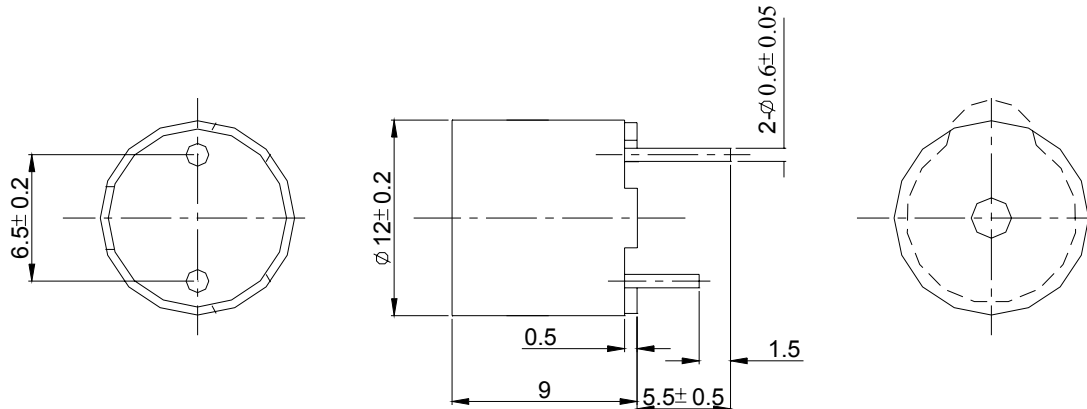

### ★Frequency Response

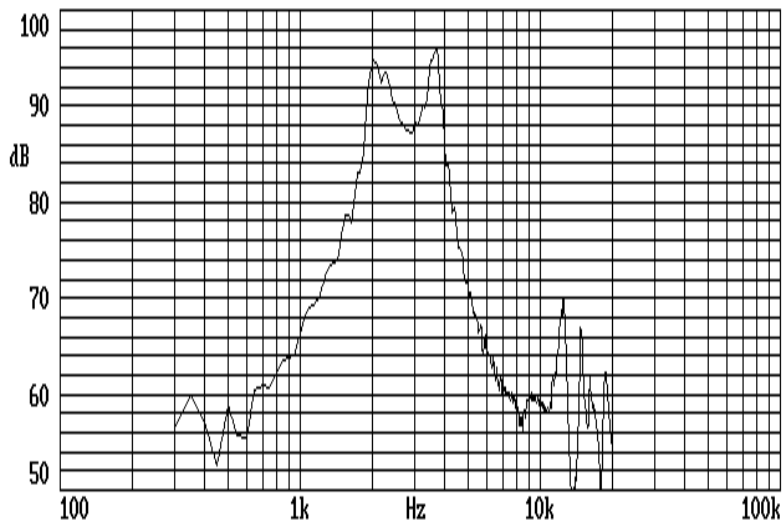

This print and information therein are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content No010406

DIS.		DATE		Page:2 of 4 3rd angle projection
CHEC.		DATE		
APPR.		DATE		

BMT-1212S

Transducer

DRG NO  
BS/TET01.016A




**BESTAR ELECTRONICS INDUSTRY CO.,LTD**  
TianAn Industry Park 4/F,Site B ChangZhou New District  
E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com


## BMT1212H09

### 3. Reliability test

- 3.1 High temperature test
  - Temperature +85° C
  - Duration 96hrs
- 3.2 Low temperature test
  - Temperature -40° C
  - Duration 96hrs
- 3.3 Temperature cycle test
  - Cycles 5



- 3.4 Humidity cycle test
  - Cycles 10



all these tests above should be measured after leaving normal temperature for 2hrs.

- 3.5 Load test
  - Power supply rated voltage
  - Duration 1000hrs
- 3.6 Vibration Test
  - Vibration Frequency 10~55Hz
  - Amplitude 1.5mm
  - Duration x,y&z directions 30min
- 3.7 Drop test
  - Height 70cm
  - (to 10mm thickness woodenboard)
  - Direction 3
- 3.8 Solderability test
  - Solderability temperature 255° C
  - Heat applying time 3sec



Notice: After the test the part shall meet specifications without any degraance and performance except S.P.L, S.P.L shall be 77dB more .

This print and information therein are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content No010406

DIS.		DATE		Page:3 of 4 3rd angle projection	BMT1212H09
CHEC.		DATE			
APPR.		DATE			Transducer
 <b>BESTAR ELECTRONICS INDUSTRY CO.,LTD</b> TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TET01.016A


## BMT1212H09

### 4. Packing

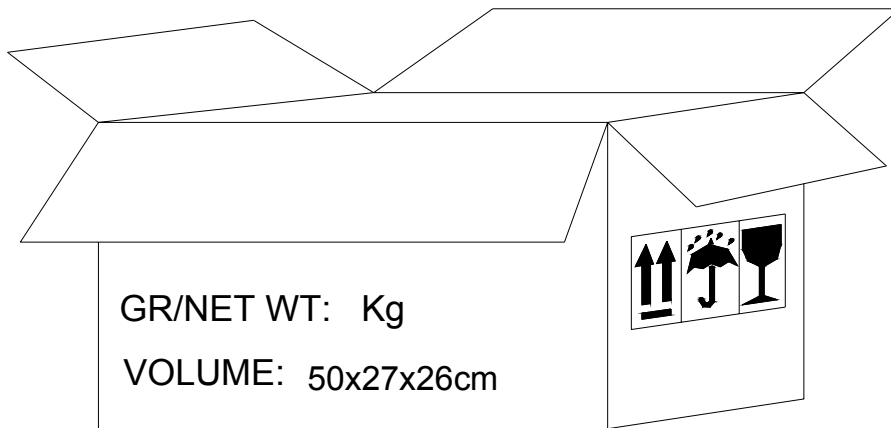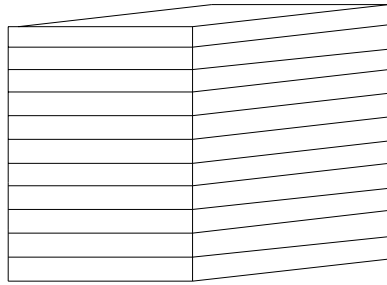

- 1)100pcs/tray
- 2)30tray/carton
- 3)3000 pcs/carton in total
- 4)carton size 50x27x26cm

This print and information there in are proprietary to Bestar Electronics Industry Co., Ltd. and shall not be used in whole or in part without its written content No.010406

DIS.		DATE		Page:4 of 4 3rd angle projection	BMT1212H09
CHEC.		DATE			Transducer
APPR.		DATE			
 <b>BESTAR ELECTRONICS INDUSTRY CO.,LTD</b> TianAn Industry Park 4/F,Site B ChangZhou New District E-Mail:bestarco@ pub.cz.jsinfo.net Http:www.be-star.com					DRG NO BS/TET01.016A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Audio Indicators & Alerts](#) category:*

*Click to view products by [Bestar](#) manufacturer:*

Other Similar products are found below :

[M2BJ-BH24E](#) [6-4](#) [68S1240-PA](#) [MBA-624](#) [F/BC 40P-DR LF](#) [FDG111PLF](#) [F/NRMB 24 BLACK LF](#) [PF-35N29WQ](#) [PFD-27A35PQ](#) [PL-27A35PSQ](#) [PS-531Q](#) [AB2020B-2-LW1](#) [EBPT-401](#) [PB06SD12AP](#) [PB-1220PEQ](#) [S6109](#) [SC2036ACP](#) [SC616N-2](#) [SC628FW](#) [SC628MPG](#) [SC648D](#) [SCS045MD9DT3S](#) [AB2025B-LW50-R](#) [ESZ-25B-5-250B](#) [F/BC 35-DR LF](#) [FCM12PLF](#) [F/EB20P-DR LF](#) [F/HU110MP24V-IP67B](#) [LF](#) [AI-2835-TF-LW150-2-R](#) [AI-4228-TF-LW305-R](#) [FSMD8585JSLF](#) [FSS-26T](#) [F/SU 21-02 LF](#) [F/TCW 05 WITH LABEL LF](#) [F/UCW 03 WITH LABEL LF](#) [F/UCW 06 WITH LABEL LF](#) [PKM22EPPH40S1-B0](#) [PKM35-4A0](#) [PL-35N29WQ](#) [PLD-27A35PQ](#) [PS-552Q](#) [CM-5](#) [M2BJ-BH24E-D](#) [REF-202](#) [LSC628ANR](#) [5-100](#) [PAL-328](#) [03-810.001](#) [RTO-1R07-001](#) [PL-21N31PQ](#) [PF-27A25PSQ](#)