



ICA-320-SGT



ICA-624-ZEGG

(2,54mm) .100"

ICA SERIES

AUTOMATED INSERTION DIP SOCKETS

Mates with:
APA

ICA

ROW SPACING &
NO. OF CONTACTS


STYLE
OPTION

PLATING
OPTION

OPTION
(Leave Blank for
Standard Version)

Specify from chart below

- Side & end stackable
- Great for auto insertion
- Open body design

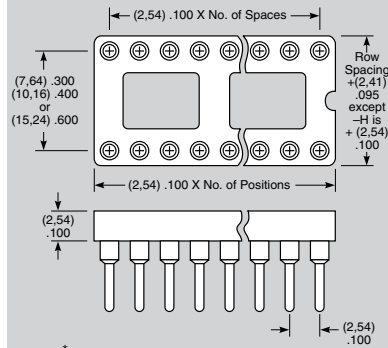

	Row Space	No. of Contacts
-308	.300 (7,62)	08
-314		14
-316		16
-318		18
-320		20
-322*		22
-324	.400 (10,16)	24
-328		28
-422	.600 (15,24)	22
-624		24
-628		28
-632		32
-640		40
-648		48

GG
= 30µ" (0,76µm)
Gold contact,
10µ" (0,25µm)
Gold Shell

GT
= 30µ" (0,76µm)
Gold contact,
Tin Shell

ST
= 10µ" (0,25µm)
Gold contact,
Tin shell (Styles -S
& -ZS only)

-2
= .360 (9,14)
Tail
**Wire-Wrap
Option**
Requires Style
-W or -ZW
Specify desired
suffix for shorter
Wire-Wrap tail.

-3
= .260 (6,60)
Tail
-L
= Locking
Socket
Requires Style
-S or -ZS
Requires GT
Plating Option

SPECIFICATIONS

For complete specifications
see www.samtec.com?ICA


Insulator Material:
Black Glass Filled
Polyester
except -328 is LCP
Contact: BeCu
Shell: Brass
Plating:
Au or Sn over 50µ" Ni
Flammability Rating:
UL 94V-O
Insulation Resistance:
5000 MΩ min
Temperature Range:
-55°C to +105°C with Tin
-55°C to +125°C with Gold.
Withstanding Voltage:
1000 VRMS
Current Rating: 1A
Contact Resistance:
10mΩ max
Lead Size Range:
.015" (0,38mm) to .022"
(0,56mm) DIA and most IC leads
Insertion Force:
(Single contact only)
Standard = 9 oz avg, 16 oz max;
Low Insertion Force =
2.5 oz avg, 5.5 oz max
Withdrawal Force:
(Single contact only)
Standard = 2.5 oz avg, 1.5 oz
min; Low Insertion Force =
2.0 oz avg, 0.35 oz min
Lead-Free Solderable:
Wave only
RoHS Compliant: Yes



Note: Some sizes, styles and
options are non-standard,
non-returnable.


-S, -ZS, -ZA

= Printed Circuit
-ZS & -ZA = Low Insertion Force



LEAD STYLE	X DIA	Y TAIL	Z
-S or -ZS	(0,51) .020	(3,18) .125	(7,62) .300
-ZA	(0,51) .020	(4,57) .180	(8,89) .350


Locking lead
available with -S
and -ZS.
See OPTION.



Insertion Depth = .095" (2,41) to .145" (3,68):
Style S Component Part No. = SC-1P1
Style ZS Component Part No. = EZ-1P1
Style ZA Component Part No. = EZ-6P1
Option L Component Part No. = SC-1L1 or EZ-1L1

-W, -ZW

= Wire-Wrap
ZW = Low Insertion Force




Shorter wire-wrap tail
lengths available.
See OPTION.

Insertion Depth = .125" (3,18) to .157" (3,99)
Style W Component Part No. = SC-1W1(1)
Style ZW Component Part No. = EZ-1W1(1)
Style W-2 Component Part No. = SC-1W1(2)
Style ZW-2 Component Part No. = EZ-1W1(2)
Style W-3 Component Part No. = SC-1W1(3)
Style ZW-3 Component Part No. = EZ-1W1(3)

-ZE

= Elevated
Low Insertion Force



Insertion Depth = .125" (3,18) to .170" (4,32)
Style ZE Component Part No. = EZ-2P3

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IC & Component Sockets](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[714-43-102-31-012000](#) [0066-3-17-15-30-14-02-0](#) [0134-0-15-15-32-27-04-0](#) [614-DG5](#) [6527-0-00-15-00-00-03-0](#) [670](#) [672](#) [673](#) [712-93-120-41-001000](#) [714-93-104-31-018000](#) [8059-4G1-LF](#) [807-22-001-10-001101](#) [807-22-001-10-003101](#) [807-22-001-10-004101](#) [807-22-001-10-006101](#) [807-22-001-30-011101](#) [807-22-001-30-012101](#) [807-22-001-30-013101](#) [807-22-001-30-014101](#) [8-1437531-4](#) [8150-6P10](#) [833-93-034-10-001000](#) [835-43-014-10-001000](#) [851-41-006-10-001000](#) [851-43-008-20-001000](#) [851-43-014-20-001000](#) [851-93-006-20-001000](#) [851-93-010-20-001000](#) [852-10-026-10-001000](#) [853-43-020-10-001000](#) [86.010.0053.0](#) [116-43-306-41-003000](#) [116-43-308-41-007000](#) [116-87-308-41-007101](#) [PX-68LCC](#) [PX-84LCC](#) [121-13-318-41-001000](#) [121-13-320-41-001000](#) [121-13-308-41-001000](#) [123-43-314-41-801000](#) [123-43-420-41-001000](#) [123-43-636-41-001000](#) [123-87-320-41-001101](#) [122-13-316-41-001000](#) [123-13-624-41-001000](#) [123-43-306-41-001000](#) [123-43-322-41-801000](#) [123-43-428-41-001000](#) [123-43-624-41-001000](#) [12-3513-11](#)