



ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## NTE5329 thru NTE5331 Single Phase Bridge Rectifier 6 Amp


**Features:**

- High Case Dielectric Strength of 1500V<sub>RMS</sub>
- Surge Overload Rating: 250A (Peak)
- Ideal for Printed Circuit Board
- Reliable Construction Utilizing Molded Plastic Technique

**Maximum Ratings and Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified. 60Hz Resistive or Inductive Load. For Capacitive Load, Derate Current by 20%)

Maximum Recurrent Peak Reverse Voltage, $P_{RV}$	
NTE5329 .....	200V
NTE5330 .....	600V
NTE5331 .....	1000V
Maximum RMS Voltage, $V_{RMS}$	
NTE5329 .....	140V
NTE5330 .....	420V
NTE5331 .....	700V
Maximum DC Blocking Voltage, $V_{DC}$	
NTE5329 .....	200V
NTE5330 .....	600V
NTE5331 .....	1000V
Maximum Average Forward Output Current, $I_{F(AV)}$	
$T_C = +100^\circ\text{C}$ .....	6A
$T_A = +40^\circ\text{C}$ .....	6A
Peak Forward Surge Current, $I_{FSM}$ (Half Sine-Wave Superimposed on Rated Load) .....	
	250A
Maximum Instantaneous Forward Voltage Drop (Per Bridge Element, $I_F = 6A$ ), $V_F$ .....	
	1.0V
Maximum DC Reverse Current (at Rated DC Blocking Voltage per Element), $I_R$	
$T_A = +25^\circ\text{C}$ .....	5 $\mu$ A
$T_A = +125^\circ\text{C}$ .....	1mA
Operating Junction Temperature Range, $T_J$ .....	
	-50° to +150°C
Storage Temperature Range, $T_{stg}$ .....	
	-50° to +150°C
Thermal Resistance, Junction to Case (Note 1), $R_{\theta JC}$ .....	
	4.7°C/W
Thermal Resistance, Junction to Ambient (Note 2), $R_{\theta JA}$ .....	
	4.7°C/W

- Note 1. Mounted on a 2.6" x 1.4" x 0.06" THK (6.5cm. x 3.5cm. x 1.5cm.) Al. Plate  
 Note 2. P.C. Board mounted on 0.5" sq. (12mm<sup>2</sup>) Cu. pads, .375" (9.5mm) lead lengths  
 Note 3. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw.

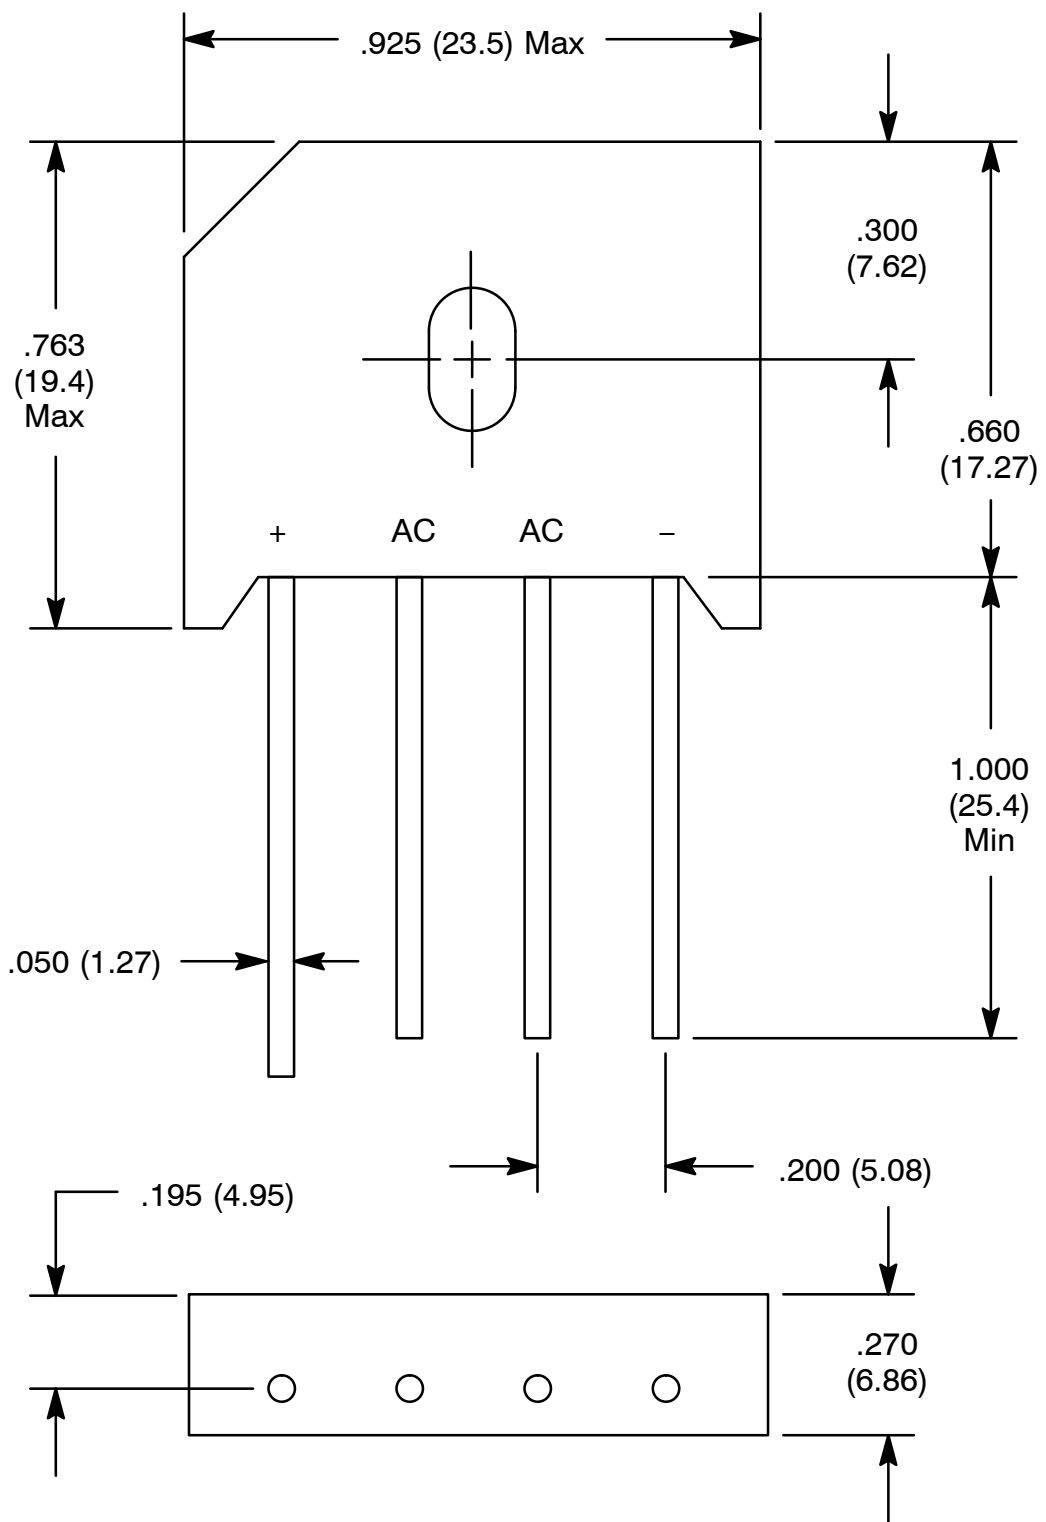

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bridge Rectifiers](#) category:*

*Click to view products by [NTE manufacturer](#):*

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S](#) [RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)