


RADIAL LEADED PTC FX/FU MODEL




■ FEATURES

- Very Lower resistance, very high hold current ,solid state
- Radial leaded product ideal for up to 16/30V and Operating temperature 125°C
- Operation current: 0.50A~15.0A
- Maximum Voltage: 16V & 30V
- Temperature range: -40°C to 125°C
- Cured, flame retardant epoxy polymer insulating material meets UL 94V-0 requirement
- Bulk packing, tape and reel available on most models

■ APPLICATIONS

- Wide variety of electronic equipment


■ PART NUMBERING SYSTEM

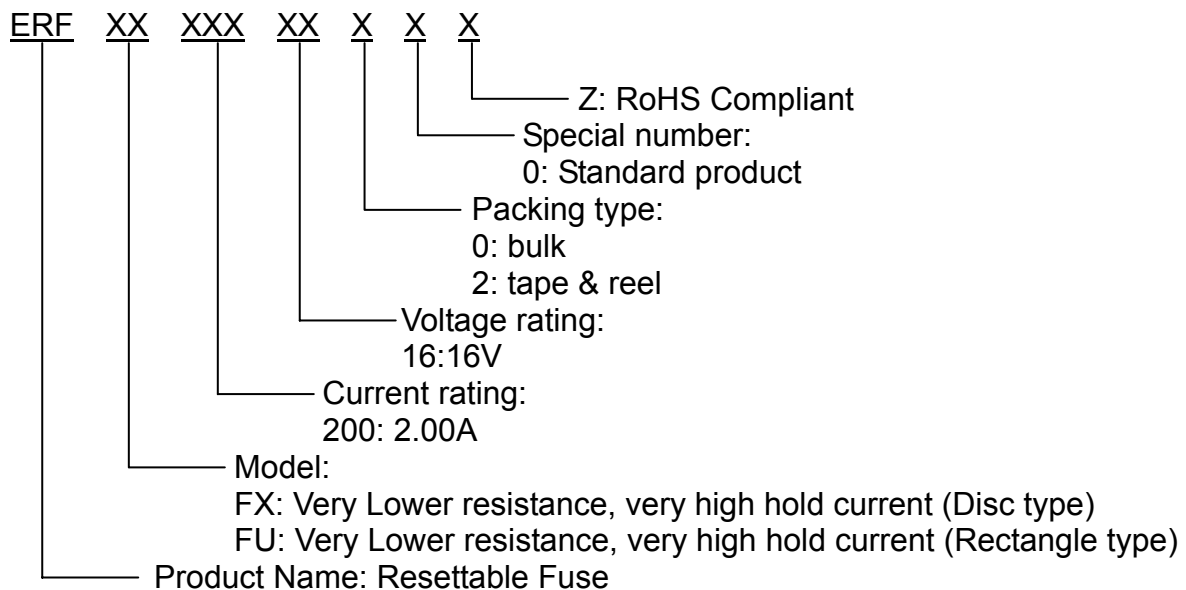

■ Marking system



Example

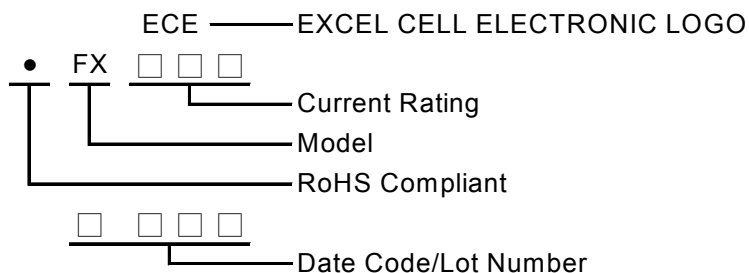

*If the current rating is under 1Amp their will be no “ ECE ” logo shown on the body.

NOTE: Specifications subject to change without prior notice.

■ Electrical characteristics(23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Maximum Current	Rated Voltage	Typical Power	Resistance Tolerance	
	I_H, A	I_T, A	at 5xI _H	I_{MAX}, A	V_{MAX}, V_{DC}	P_d, W	R_{MIN}	R_{1MAX}
							Ω	Ω
FX050-30	0.50	0.9	2.5	40	30	0.9	0.4800	1.1000
FX100-30	1.00	1.8	5.2	40	30	1.4	0.1800	0.4300
FX200-16	2.00	3.8	3.0	100	16	1.4	0.0450	0.1100
FU070-30	0.70	1.4	3.2	40	30	1.4	0.3000	0.8000
FU300-16	3.00	6.0	5.0	100	16	3.0	0.0330	0.0790
FU400-16	4.00	7.0	5.0	100	16	3.3	0.0240	0.0600
FU450-16	4.50	7.8	3.0	100	16	3.6	0.0220	0.0540
FU550-16	5.50	10.0	6.0	100	16	3.5	0.0150	0.0370
FU600-16	6.00	10.8	5.0	100	16	4.1	0.0130	0.0320
FU650-16	6.50	12.0	5.5	100	16	4.3	0.0110	0.0260
FU700-16	7.00	13.0	7.0	100	16	4.0	0.0100	0.0250
FU750-16	7.50	13.1	7.0	100	16	4.5	0.0094	0.0220
FU800-16	8.00	15.0	8.0	100	16	4.2	0.0080	0.0200
FU900-16	9.00	16.5	10.0	100	16	5.0	0.0074	0.0170
FU10A-16	10.0	18.5	9.0	100	16	5.3	0.0062	0.0150
FU11A-16	11.0	20.0	11.0	100	16	5.5	0.0055	0.0130
FU13A-16	13.0	24.0	13.0	100	16	6.9	0.0041	0.0100
FU14A-16	14.0	27.0	13.0	100	16	6.9	0.0030	0.0090
FU15A-16	15.0	28.0	20.0	100	16	7.0	0.0032	0.0092

I_H =Hold current-maximum current at which the device will not trip at 23°C still air.

I_T =Trip current-minimum current at which the device will always trip at 23°C still air.

V_{MAX} =Maximum voltage device can withstand without damage at its rated current.

I_{MAX} = Maximum fault current device can withstand without damage at rated voltage (V max).

P_d =Typical power dissipated from device when in the tripped state in 23°C still air environment.


R_{MIN} =Minimum device resistance at 23°C.

R_{1MAX} =Maximum device resistance at 23°C 1 hour after tripping .


NOTE: Specifications subject to change without prior notice.

■ **Typical Time-To-Trip at 23°C**

- A=FX050-30
- B=FU070-30
- C=FX100-30
- D=FX200-16
- E=FU300-16
- F=FU400-16
- G=FU450-16
- H=FU550-16
- I=FU600-16
- J=FU650-16
- K=FU700-16
- L=FU750-16
- M=FU800-16
- N=FU900-16
- O=FU10A-16
- P=FU11A-16
- Q=FU13A-16
- R=FU14A-16
- S=FU15A-16

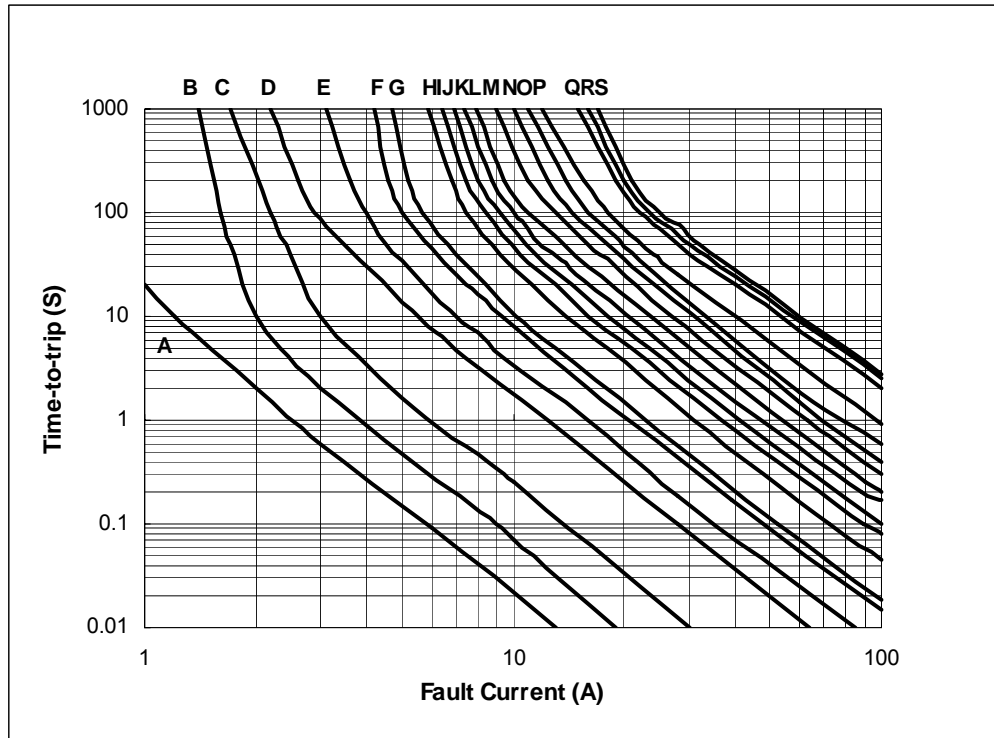

■ **Thermal Derating Curve**

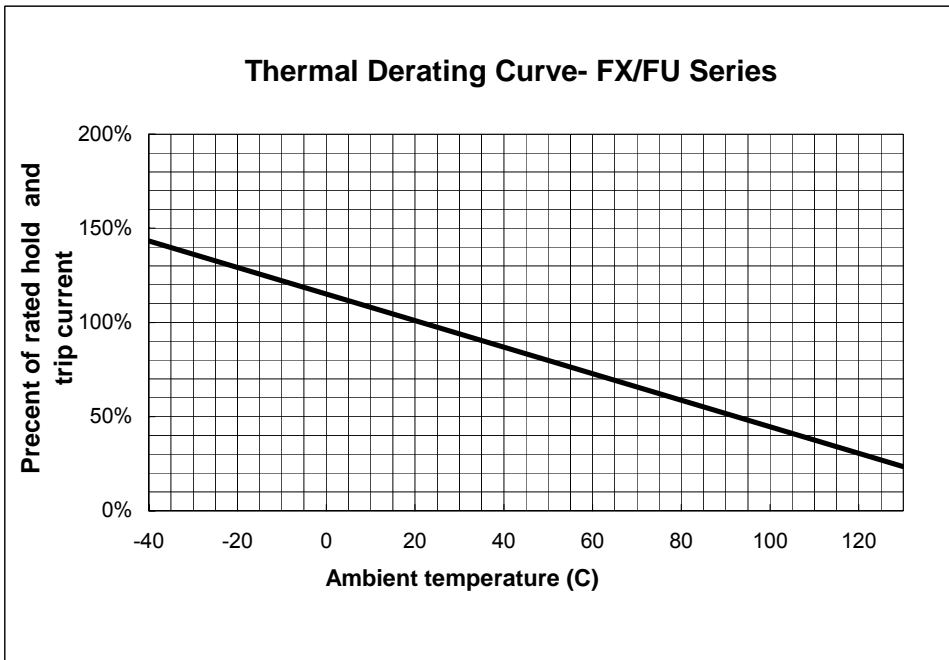

NOTE: Specifications subject to change without prior notice.

■ FX/FU Product Dimensions (UNIT: mm)

Part Number	A	B	C	D	E	F	Figure
	Maximum	Maximum	Typical	Minimum	Maximum	Typical	
FX050-30	7.4	12.7	5.1	7.6	3.0	1.2	1
FX100-30	9.7	13.6	5.1	7.6	3.0	1.2	1
FX200-16	9.4	14.4	5.1	7.6	3.0	1.2	1
FU070-30	6.9	10.8	5.1	7.6	3.0	1.2	2
FU300-16	8.8	13.8	5.1	7.6	3.0	1.2	3
FU400-16	10.0	15.0	5.1	7.6	3.0	1.2	3
FU450-16	10.4	15.6	5.1	7.6	3.0	1.2	3
FU550-16	11.2	18.9	5.1	7.6	3.0	1.2	3
FU600-16	11.2	21.0	5.1	7.6	3.0	1.2	3
FU650-16	12.7	22.2	5.1	7.6	3.0	1.2	3
FU700-16	14.0	21.9	5.1	7.6	3.0	1.2	3
FU750-16	14.0	23.5	5.1	7.6	3.0	1.2	3
FU800-16	16.5	22.5	5.1	7.6	3.0	1.2	3
FU900-16	16.5	25.7	5.1	7.6	3.0	1.2	3
FU10A-16	17.5	26.5	10.2	7.6	3.0	1.2	3
FU11A-16	21.0	26.1	10.2	7.6	3.0	1.2	3
FU13A-16	23.5	28.7	10.2	7.6	3.0	1.4	4
FU14A-16	23.5	28.7	10.2	7.6	3.0	1.4	4
FU15A-16	23.5	28.7	10.2	7.6	3.0	1.4	4




Figure 1

- Lead Size: 24AWG
- $\Phi 0.51\text{mm}$ Diameter




Figure 2

- Lead Size: 22AWG
- $\Phi 0.65\text{mm}$ Diameter




Figure 3

- Lead Size: 20AWG
- $\Phi 0.81\text{mm}$ Diameter




Figure 4

- Lead Size: 18AWG
- $\Phi 1.00\text{mm}$ Diameter

NOTE: Specifications subject to change without prior notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Specialty Fuses](#) category:

Click to view products by [ECC manufacturer](#):

Other Similar products are found below :

[63NZ02GL](#) [714125](#) [722134](#) [80NH00GR-6](#) [FWH-200A](#) [FWP-32A14F](#) [FWP-50](#) [HBM-25](#) [12LCT](#) [12TDLSJ63](#) [REN-3](#) [15.5CAVH2E](#) [ECF-2](#)
[ECF-4](#) [ECF-6](#) [170M0213](#) [170M1314](#) [170M1369-D](#) [170M3809D](#) [BK/F02A-2AS](#) [BK/F02B-1A](#) [N-2-1/2](#) [N-3-2/10](#) [NITD2](#) [20D16](#) [20D16SC](#)
[20D27FB](#) [KAA-3](#) [KAB-2](#) [KAB-30](#) [KAJ-60](#) [KAW-3](#) [2D16](#) [LKN-125B](#) [16D27SB](#) [170M1564D](#) [170M2616](#) [170M2668](#) [170M4161](#)
[170M4241](#) [170M4699](#) [ESD63](#) [ABS-25](#) [ABS-30](#) [ABS-8](#) [ACF-15](#) [ACF-30](#) [ACO-30](#) [SSD10](#) [200NH1M](#)