

SCHOTTKY RECTIFIER
HIGH EFFICIENCY SERIES

8EQ045

10A, 45V


Major Ratings and Characteristics

Characteristics	8EQ045	Units
$I_{F(AV)}$	10	A
V_{RRM}	45	V
I_{FSM} @ $t_p = 8.3ms$ half-sine	80	A
V_F @ 10Apk, $T_J = 125^\circ C$	0.58	V
T_J, T_{stg} Operating and storage	-55 to 150	$^\circ C$

Description/Features

The 8EQ045 Schottky rectifier has been expressly designed to meet the rigorous requirements of HiRel environments. It is packaged in the hermetic isolated LCC-18 ceramic package. The device's forward voltage drop and reverse leakage current are optimized for the lowest power loss and the highest circuit efficiency for typical high frequency switching power supplies and resonant power converters. Full MIL-PRF-19500 quality conformance testing is available on source controlled drawings to TX, TXV and S levels.

- Hermetically Sealed
- Low Forward Voltage Drop
- High Frequency Operation
- Guard Ring for Enhanced Ruggedness and Long Term Reliability
- Surface Mount
- Lightweight
- ESD Rating: Class 3A per MIL-STD-750, Method 1020

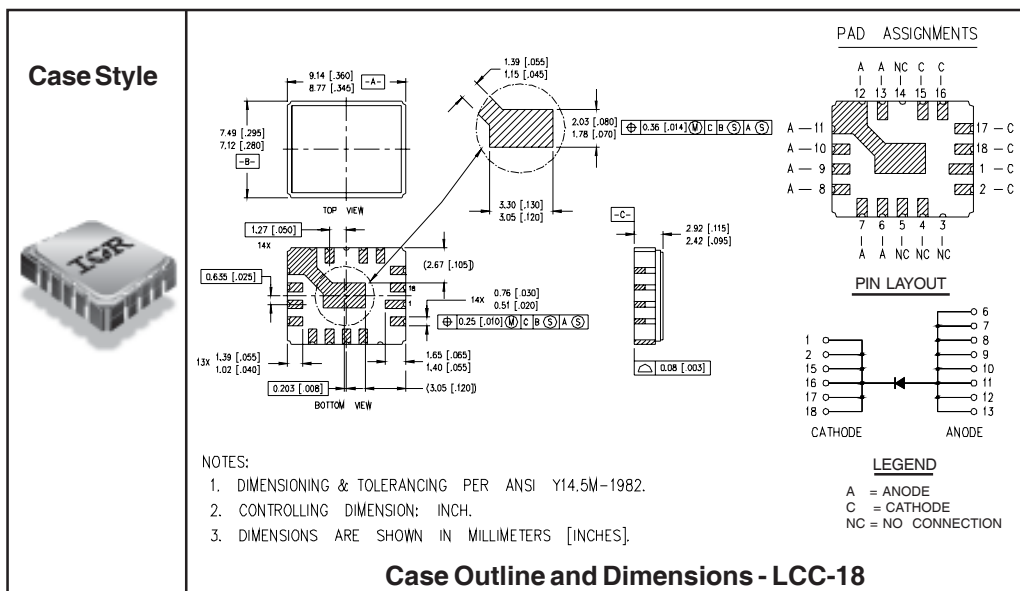

Voltage Ratings

Part number	8EQ045
V _R Max. DC Reverse Voltage (V)	45
V _{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	Limits	Units	Conditions
I _{F(AV)} Max. Average Forward Current See Fig. 5	10	A	50% duty cycle @ T _C = 100°C, rectangular waveform
I _{FSM} Max. Peak One Cycle Non - Repetitive Surge Current	80	A	@ t _p = 8.3 ms half-sine

Electrical Specifications

Parameters	Limits	Units	Conditions
V _{FM} Max. Forward Voltage Drop See Fig. 1①	0.79	V	@ 10A T _J = -55°C
	0.85	V	@ 20A
	0.65	V	@ 10A T _J = 25°C
	0.84	V	@ 20A
	0.58	V	@ 10A T _J = 125°C
	0.77	V	@ 20A
I _{RM} Max. Reverse Leakage Current See Fig. 2 ①	0.5	mA	T _J = 25°C V _R = rated V _R
	15	mA	T _J = 125°C
C _T Max. Junction Capacitance	900	pF	V _R = 5V _{DC} (1MHz, 25°C)
L _S Typical Series Inductance	4.3	nH	Measured from center of cathode pad to center of anode pad

Thermal-Mechanical Specifications

Parameters	Limits	Units	Conditions
T _J Max. Junction Temperature Range	-55 to 150	°C	
T _{stg} Max. Storage Temperature Range	-55 to 150	°C	
R _{thJC} Max. Thermal Resistance, Junction to Case	6.0	°C/W	DC operation See Fig. 4
wt Weight (Typical)	0.42	g	
Die Size	125X125	mils	
Case Style	LCC-18		

① Pulse Width < 300μs, Duty Cycle < 2%

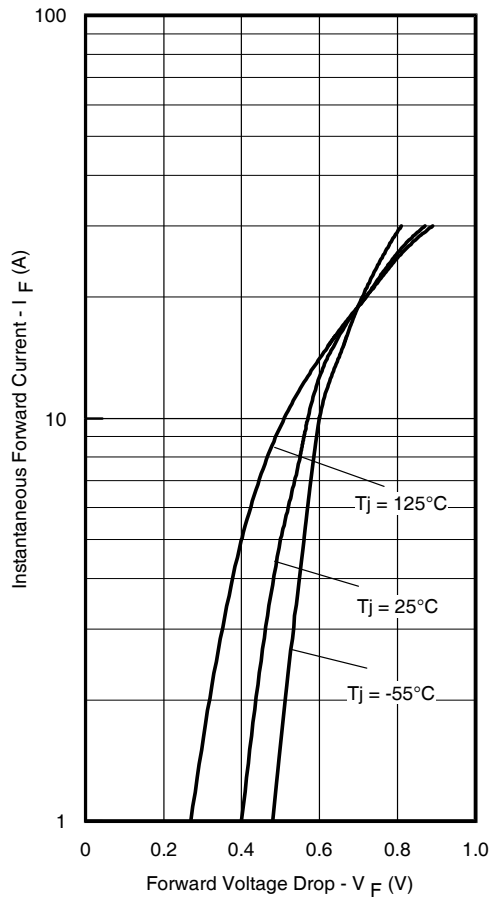


Fig. 1 -Typical Forward Voltage Drop Characteristics

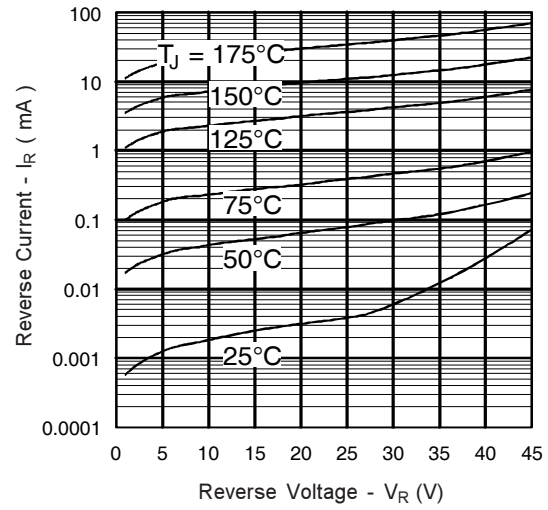


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

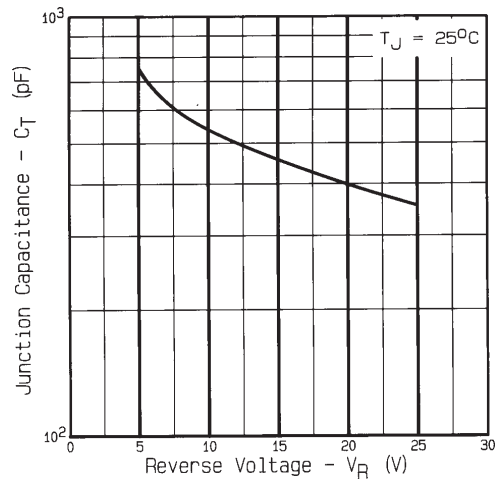


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

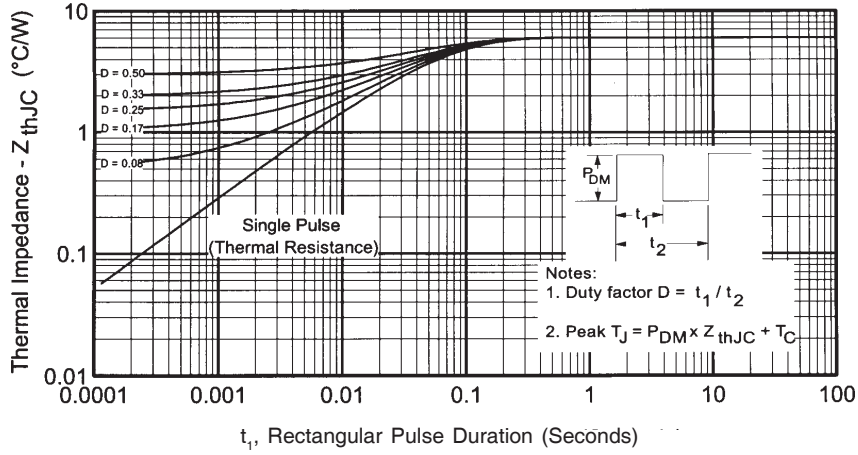


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

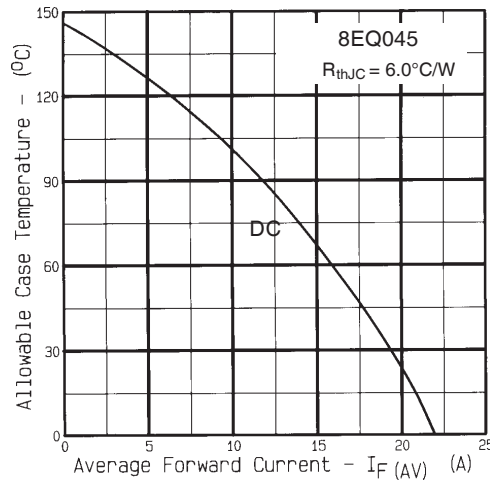


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [infineon](#) manufacturer:

Other Similar products are found below :

[TLE6209R](#) [EVALM113023645ATOBO1](#) [EVALM11302TOBO1](#) [FD1000R33HE3-K](#) [FD300R06KE3](#) [FF1200R17KE3_B2](#)
[FF300R06KE3HOSA1](#) [FF600R12ME4P](#) [FF600R17ME4_B11](#) [FP25R12KT4_B11](#) [FS600R07A2E3_B31](#) [FZ1600R17HP4_B2](#)
[FZ1800R17KF4](#) [FZ2400R17HE4_B9](#) [FZ600R65KE3](#) [DD261N22K](#) [DF1000R17IE4](#) [AUIRL1404ZS](#) [BAS 40-04 E6327](#)
[BAS4007WH6327XTSA1](#) [BAS 70-04 E6327](#) [BAS 70-06 E6327](#) [BAT15099E6327HTSA1](#) [BAT 60A E6327](#) [BAT 60B E6327](#) [BC 817SU](#)
[E6327](#) [BC 817U E6327](#) [BC 817UPN E6327](#) [BC 846PN H6327](#) [BC 846UPN E6327](#) [BC 847PN H6327](#) [BCM 856S H6327](#)
[BCP5416H6327XTSA1](#) [BCP55H6327XTSA1](#) [BCP5616H6327XTSA1](#) [BCR 108 E6327](#) [BCR 10PN H6327](#) [BCR 133W H6327](#) [BCR 141](#)
[E6327](#) [BCR 141S H6327](#) [BCR 141W H6327](#) [BCR 162 E6327](#) [BCR 183W H6327](#) [BCR 185S H6327](#) [BCR 192 E6327](#) [BCR 35PN H6327](#)
[BCR 523U E6327](#) [BCR 533 E6327](#) [BCR 555 E6327](#) [BCV 46 E6327](#)