

# Aardvark™ I2C/SPI Host Adapter



## Key Features

### USB to I2C/SPI Interface

- Master or slave emulation
- EEPROM/Flash programming
- I2C speeds up to 800 kHz
- SPI speeds up to 8 MHz
- GPIOs available
- In-system or stand-alone programming

### Control Center Software

- Simplified transmission of I2C and SPI messages
- Automate tasks with XML-based batch scripts

### Flash Center™ Software

- Extensible XML-based parts library with built-in support for EEPROMs and Flash memory

### Aardvark API

- Create custom software applications
- Example files included
- Cross-platform support for Windows, Linux, Mac OS X

### USB Bus-Powered

- Portable
- No extra power adapters needed

### Quality

- CE, REACH, RoHS
- Manufacturing: ISO 9001, ISO 13485, AS9100C, ITAR
- One year warranty

An ever-wider array of devices and the increasing pressure to minimize costs means that you need to get the most out of your embedded systems interface tools - and the Aardvark™ I2C/SPI Host Adapter is expressly designed to enable your competitive edge.

Our most popular product, the Aardvark I2C/SPI Host Adapter, is a fast and powerful USB-to-I2C/SPI bus host adapter. It helps you to focus on your core competencies by deploying customized solutions with minimal engineering overhead. With its ability to emulate a master or slave, communicate in I2C or SPI, the Aardvark I2C/SPI Host Adapter is a versatile tool well-suited to a variety of applications.

### Prototyping

- Emulate a master or slave to quickly create a prototype embedded system
- Evaluate peripherals such as sensors and memory chips, quickly and easily

### Production and Testing

- Program firmware and other data in production environment
- Run automated tests

### Bundling

- Provide end-customers with easy access to I2C/SPI lines of your device

### Prototyping Use Case

Create working prototypes quickly and easily with the Aardvark I2C/SPI adapter. As a master, it can emulate an MCU to actively poll sensors, write and read from EEPROMs, and control the bus.

### Production Use Case

Seamlessly integrate the Aardvark I2C/SPI adapter into your production environment. Using the API or LabVIEW VIs allows the user to build software applications customized for their production line. For example, the Aardvark I2C/SPI adapter can be configured to program firmware onto EEPROMs, read data from specific registers, and run automated tests scripts.

## Applications

<b>Memory Programming</b> EEPROMs Flash	<b>Sensors</b> Accelerometers Pressure Temperature Light	<b>Industrial and Home Automation</b> Motor controls Lighting controls	<b>Audio Processing</b> Converters Signal Processing
---	--	--	--

## Specifications

### Software

The Control Center Software provides quick and easy access to all features of the Aardvark I2C/SPI Host Adapter. The Flash Center software enable users to easily read and write to I2C- and SPI-based memory.

#### Control Center Software Features

- Streamlined user interface for configuration of I2C, SPI, and GPIOs at the click of a button
- I2C and SPI messages can be saved and loaded from binary files
- XML-based batch scripting for automating repetitive read and write commands with built-in help system

#### Flash Center Software Features

- Easily program, read, and write to I2C and SPI EEPROMs and flash memory

#### Aardvark API and LabVIEW Support

- Create custom applications using the flexible, powerful, and well-documented Aardvark API
- 32- and 64-bit support for C/C++/C#, Python, .NET, VB.Net, VB 6
- LabVIEW Instrument drivers

#### Operating Systems Supported (32-bit and 64-bit)

- Windows: XP, Vista, 7, 8, 8.1
- Linux: Red Hat, SuSE, Ubuntu, Fedora, Arch, CentOS, Debian
- Mac OS X: 10.4-10.9

### Hardware

#### Bit Rate

I2C Master: 1 kHz - 800 kHz  
 SPI Master: 125 kHz - 8MHz  
 SPI Slave: 0.1 MHz - 4 MHz

#### Target Bus Interface

I2C Master/Slave  
 SPI Master/Slave  
 Up to 6 GPIO pins

#### Host Bus Interface

USB 1.1  
 Type B receptacle

#### Target Bus Cable

10-pin ribbon cable  
 1.27 mm (0.05") pitch  
 130.175 mm (5 1/8") length

#### Target Bus Connector

Type: 2x5 IDC female, 2.54 mm (0.10") pitch  
 Pinout:  
 Power Pins: GND (Pins 2, 10), NC/+5V (Pins 4, 6)  
 I2C Pins: SCL (Pin 1), SDA (Pin 3)  
 SPI Pins: MISO (Pin 5), SCLK (Pin 7), MOSI (Pin 8), SS (Pin 9)  
 GPIO Pins: 1, 3, 5, 7, 8, 9

#### DC Characteristics

Target Power: +5V, 25mA max  
 I2C/SPI Signal: 3.3V, 10mA

#### Dimensions (W x D x L)

55.6 x 22.2 x 89 mm (2.19" x 0.87" x 3.5")

#### Weight


64 g (0.14 lbs)

#### Operating Temperature

10 to 35 °C (50 to 95 °F)

### Ordering information

Aardvark I2C/SPI Host Adapter	
Part Number	TP240141
Country of Origin	USA
HTS	8543200000
ECCN	EAR99

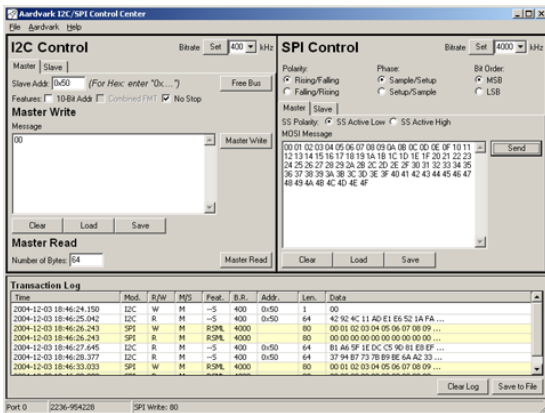

Control Center: I2C and SPI Modules in use

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Development Boards & Kits - Other Processors](#) category:*

*Click to view products by [Total Phase](#) manufacturer:*

Other Similar products are found below :

[KIT\\_AURIX\\_TC233LP\\_TRB](#) [EVB-MEC1418MECC](#) [SPC56XVTOP-M](#) [ADZS-BF506F-EZLITE](#) [ADZS-SADA2-BRD](#) [20-101-1252](#)  
[T1023RDB-PC](#) [20-101-1267](#) [T1042D4RDB-PA](#) [ML610Q174](#) [REFERENCE BOARD](#) [MPC574XG-MB](#) [BSC9132QDS](#) [C29XPCIE-RDB](#)  
[KIT\\_TC1793\\_SK](#) [CC-ACC-18M433](#) [P1010RDB-PB](#) [P1020RDB-PD](#) [P2020COME-DS-PB](#) [STM8S/32-D/RAIS](#) [T4240RDB-PB](#) [TRK-USB-](#)  
[MPC5604B](#) [TWR-56F8200](#) [CY3674](#) [SPC58XXADPT176S](#) [MAX1464EVKIT](#) [TRK-MPC5606B](#) [RTE510Y470TGB00000R](#) [STM8128-](#)  
[MCKIT](#) [MAXQ622-KIT#](#) [YRPBRL78G11](#) [SPC58EEMU](#) [QB-R5F10JGC-TB](#) [YQB-R5F11BLE-TB](#) [SPC564A70AVB176](#)  
[RTE5117GC0TGB00000R](#) [QB-R5F100LE-TB](#) [YR0K50571MS000BE](#) [YQB-R5F1057A-TB](#) [QB-R5F104PJ-TB](#) [CC-ACC-ETHMX](#)  
[LFM34INTPQA](#) [SPC563M64A176S](#) [Y-BLDC-SK-RL78F14](#) [P1021RDB-PC](#) [SPC58XCADPT176S](#) [RTE510MPG0TGB00000R](#)  
[YRPBRX71M](#) [LFMAJ04PLT](#) [KITAURIXTC234LPSTRBTOBO1](#) [OV-7604-C7-EVALUATION-BOARD](#)