

Preset counters, electronic

LCD preset counters **1 or 2 presets – pulse, time – 5 kHz (AC+DC)** **Codix 907 / 908**



The pulse and time preset counters Codix 907 and 908 offer all important counter functions with an unbeatable price/performance ratio.

The counters offer easy, user-friendly installation thanks to their minimal installation depth and plug-in screw terminals; the 2-line LCD display is available with optional backlighting, making it even easier to read with just a quick glance.



Preset counters

 DC 11 ... 30 V Power supply	 AC 115/230V 115/230V	 -10° + 50° Temperature range	 000000 DIN 48 x 48	 P F O B Menu-driven programming	 IP65 High protection level	 max. 5 kHz Count frequency	 Plug-in screw terminal	 1 or 2 Presets 907: 1 / 908: 2	 Multifunction
 2x6 LCD LCD display	 Multicolour display								

Powerful

- For pulse, time and position
- Adding or subtracting
- Automatic reset when preset is reached, or by key-press or electrically
- Codix 907: 1 preset / Codix 908: 2 presets
- 2 x 6-digit display and preset annunciators from -999999 to +999999
- Display with or without backlighting, 2-colour

Simple

- Plug-in screw terminal
- Simple menu-driven programming
- Decade keypad, for each digit one key
- DC or AC powered
- Minimum installation depth
- High protection level (IP65) with integrated front bezel gasket
- With preset annunciators

Order Code

6.90 X . 0 1 0 X . X A 0

a b c d e

a Number of presets

- 7 = 1 preset
- 8 = 2 presets

b Outputs

- 0 = relays

c LCD version

- 0 = no backlighting
- 1 = green backlighting
- 4 = 2-colour, negative red/green backlighting

d Power supply

- 0 = 230 V AC
- 1 = 115 V AC
- 3 = 10 ... 30 V DC

e Input trigger level

- A = 4 ... 30 V DC level

Delivery specification

- Preset counter
- Mounting clip
- 8 pin screw terminal
- 7 pin screw terminal
- Operating instructions

Stock types

- 6.907.0100.3A0
- 6.908.0100.3A0
- 6.908.0101.3A0
- 6.907.0100.0A0
- 6.908.0100.0A0
- 6.908.0101.0A0

Preset counters, electronic

LCD preset counters		1 or 2 presets – pulse, time – 5 kHz (AC+DC)		Codix 907 / 908
Accessories	Dimensions in mm [inch]			Order-No.
Adapter front bezel, 55 x 55 [2.17 x 2.17]	For cut-out 50 x 50 [1.97 x 1.97] to cut-out 45 x 45 [1.77 x 1.77] with clip mounting for counters 48 x 48 [1.89 x 1.89]		black	T008853
	Gasket 58 x 58 [2.28 x 2.28], for cut-out 50.2 x 50.2 [1.98 x 1.98]			N511004
Adapter front bezel, 60 x 75 [2.36 x 2.95]	For cut-out 50 x 50 [1.97 x 1.97] to cut-out 45 x 45 [1.77 x 1.77] with screw mounting for counters 48 x 48 [1.89 x 1.89]		black	T008860
	Gasket 60 x 75 [2.36 x 2.95] for cut-out 50 x 50 [1.97 x 1.97]			N511020
Adapter front bezel, 72 x 72 [2.83 x 2.83]	For cut-out 68 x 68 [2.68 x 2.68] to cut-out 45 x 45 [1.77 x 1.77] (Mating clip T009420 must be ordered separately)		black mating clip	T008177 T009420
Sealing cover type K2, IP65	Suitable for front bezel 75 x 60 [2.95 x 2.36] with screw mounting		transparent/black	G008303
Transparent cover, IP65	For cut-out 50 x 50 [1.97 x 1.97], with screw mounting for counters with cut-out 45 x 45 [1.77 x 1.77] and front bezel 48 x 48 [1.89 x 1.89]		lockable key lockable	G008143 G008153
Mounting frame with cut-out 50 x 50 [2.36 x 2.36] via separate adapter also for 45 x 45 [1.77 x 1.77]	For snap-on mounting on 35 [1.38] top-hat DIN rail, for counters 48 x 48 [1.89 x 1.89], 53 x 53 [2.09 x 2.09] and 55 x 55 [2.17 x 2.17]		chromated	G300003
Replacement parts				
8-pin connector	1 ... 8, pitch 3.81			N100498
7-pin connector	9 ... 15 (for 923 / 924), pitch 5.08			N100548u002

Suitable gaskets as well as further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.

Technical data	
General technical data	
Display	<ul style="list-style-type: none"> - 2 line 2 x 6 digits LCD display upper line 9 mm [0.35"], lower line 7 mm [0.28"], special sign 2 mm high [0.079"] - positive green with optional backlighting - 2-colour upper line: negative, red backlighting lower line: negative, green backlighting
Operating temperature	-10°C ... +50°C [+14°F ... +122°F] (non-condensing)
Storage temperature	-25°C ... +75°C [-13°F ... +167°F]
Humidity at +40°C [+104°F]	RH 93% (non-condensing)
Altitude	up to 2000 m [6562']
Mechanical Data	
Protection	IP65 (front side)
Weight	AC version approx. 250 g [8.82 oz] DC version approx. 150 g [5.29 oz]
Electrical characteristics	
Sensor power supply	AC 115/230 V, ±10%, 50/60 Hz, max. 6.5 VA
	DC 11 ... 30 V, max. 4 W
External fuse protection	230 V AC T 0.1 A
	115 V AC T 0.125 A
	11 ... 30 V DC T 0.2 A
Data retention	> 10 years, EEPROM
Input modes	pulse counter cnt.dir, up.dn, quad FrErUn, InpA.InpB., InpB.InpB.
Sensor power supply	AC supply 24 V DC -40/+15%, 50 mA at 230 V AC, 40 mA at 115 V AC
	DC supply max. 50 mA external power supply is connected through
EMC	Emitted interference EN55011 class B
	Immunity to interference EN 61000-6-2
Device safety	Designed to EN61010 part 1
	Protection class 2
	Application area Pollution level 2

Preset counters, electronic

LCD preset counters	1 or 2 presets – pulse, time – 5 kHz (AC+DC)	Codix 907 / 908
----------------------------	---	------------------------


Inputs	
Count inputs	A and B
Polarity of the inputs	programmable for all inputs in common, NPN/PNP
Input resistance	10 kΩ
Count frequency	max. 5 kHz (details see manual) can be damped to 30 Hz (mechanical contacts)
Control / Reset input	Lock, Reset
Min pulse duration of signal and control inputs	statical / 1 ms
Switching levels with AC/DC supply	4 ... 30 V DC: low 0 ... 2 V DC high 3.5 ... 30 V DC
Pulse shape	variable, Schmitt-Trigger characteristics

Outputs	
Switching voltage	max. 250 V AC / 110 V DC
Switching current	max. 3 A AC/DC min. 30 mA DC
Switching capacity	max. 750 VA / 90 W
Output 1	Mech. service life (switching cycles) 2×10^7 N° of switching cycles at 3 A / 250 V AC 1×10^5 N° of switching cycles at 3 A / 30 V DC 1×10^5 Relay with closing contact, progr. normal closed or normal open.
Output 2	Mech. service life (switching cycles) 20×10^6 N° of switching cycles at 3 A / 250 V AC 5×10^4 N° of switching cycles at 3 A / 30 V DC 5×10^4 Relay with changeover contact
Reaction time of the outputs	pulse counter < 15 ms timer < 10 ms


Preset counters

Terminal assignment

Pin	Signal and control inputs
1	Sennsor power supply
2	GND (0 V DC)
3	INP A (Signal input A)
4	INP B (Signal input B)
5	RESET (Reset input)
6	LOCK (Key locking input)
7	n. c.
8	n. c.




Pin	Version with relays
9	Relay contact C.
10	Relay contact N.O.
11	Relay contact C.
12	Relay contact N.O.
13	Relay contact N.C.
14	AC: 115/230 V AC N~ DC: 11 ... 30 V DC
15	AC: 115/230 V AC L~ DC: GND (0 V DC)



Dimensions

Dimensions in mm [inch]

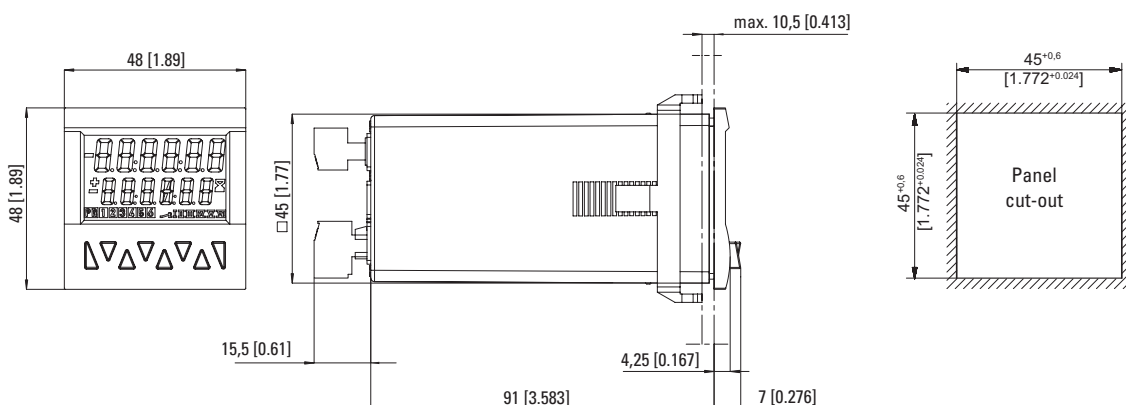

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Counters & Tachometers](#) category:

Click to view products by [Kubler](#) manufacturer:

Other Similar products are found below :

[LC2H-FE-2K-N](#) [H7CN-XLN DC12-48](#) [LC24-F-N](#) [H7CXAWD1NDC1224AC24](#) [H7ER-NV1-H](#) [H7CX-A114S-N AC100-240](#) [H7CX-AWSD-N-DC12-24](#) [H7CX-AU-N AC100-240](#) [GPMZC-SET](#) [CX6S-1P2F](#) [CX6S-1P4F](#) [CX6S-2P2F](#) [CX6S-2P4F](#) [H127.010A01H](#) [H5KLR-11 100-240V AC/DC](#) [H7CX-AUD1-N](#) [H7CX-AW-N](#) [3.550.401.075](#) [3.550.401.351](#) [LC2H-C-2K-N](#) [LC2H-C-30-N](#) [LC2H-F-DL-2KK](#) [LC4H-R4-AC240VS](#) [LC4H-R6-AC240V](#) [1.150.510.012.550](#) [1.150.510.054.550](#) [1.150.510.056.550](#) [6.520.012.300](#) [6.560.010.300](#) [SLE-73-1400-1-4-01](#) [SLIK-94-1521-1-3-001](#) [SLN-94-1421-1-3](#) [SPI-73-1411-1-3-011](#) [CT6S-1P4](#) [Y-50](#) [LC4H-R4-AC24V](#) [LC4H-R4-DC24V](#) [CT6S-2P4](#) [LC2H-F-DL-2KK-B](#) [LC2H-FE-DL-2KK-B](#) [LC2H-FE-FV-30](#) [H127.010A01G](#) [H5KLR-8B 12-48 AC/DC](#) [H7CX-A11-N](#) [H7CX-AD-N](#) [H7CX-AU-N](#) [H7ER-NV1](#) [H8DA 12-48V AC/DC](#) [87622062](#) [99776901](#)