







-  **Height:** 2.5mm Max
-  **Footprint:** 6.2mm x 6.2mm Max
-  **Current Rating:** up to 3.5A
-  **Inductance Range:** .9μH to 900μH

Electrical Specifications @ 25°C - Operating Temperature -40°C to +130°C

Part Number	Inductance ² @ Irated (μH TYP)	Irated ³ (A)	DCR (mΩ)		Inductance @ OADC (μH ±20%)	Saturation ⁴ Current Isat (A)	Heating ⁵ Current Idc (A)
			TYP	MAX			
PG0063.102NL	0.9	3.5	15	22	1.0	3.5	4.5
PG0063.152NL	1.3	3.0	25	30	1.5	3.0	3.8
PG0063.222NL	1.9	2.5	33	40	2.2	2.5	3.3
PG0063.332NL	2.9	2.0	55	65	3.3	2.0	2.9
PG0063.472NL	4.2	1.8	76	90	4.7	1.8	2.7
PG0063.682NL	6.1	1.5	91	105	6.8	1.5	2.2
PG0063.103NL	9.0	1.2	128	150	10	1.2	1.9
PG0063.153NL	13	1.0	181	210	15	1.0	1.6
PG0063.223NL	19	0.8	250	290	22	0.8	1.3
PG0063.333NL	29	0.65	342	400	33	0.65	1.2
PG0063.473NL	42	0.55	492	565	47	0.55	0.96
PG0063.683NL	61	0.50	728	800	68	0.50	0.76
PG0063.104NL	90	0.40	1047	1205	100	0.40	0.62
PG0063.154NL	130	0.30	1590	2020	150	0.30	0.50
PG0063.224NL	190	0.26	2019	2220	220	0.26	0.42
PG0063.334NL	290	0.20	3144	3305	330	0.20	0.32
PG0063.474NL	420	0.16	4800	5040	470	0.16	0.28
PG0063.684NL	610	0.14	7027	7380	680	0.14	0.22
PG0063.105NL	900	0.12	11010	11340	1000	0.12	0.18

NOTES FROM TABLE: (See page 43)




SMT Power Inductors

Unshielded Drum Core - PG0063 Series


Mechanicals

Schematics


PG0063.102



SUGGESTED PAD LAYOUT

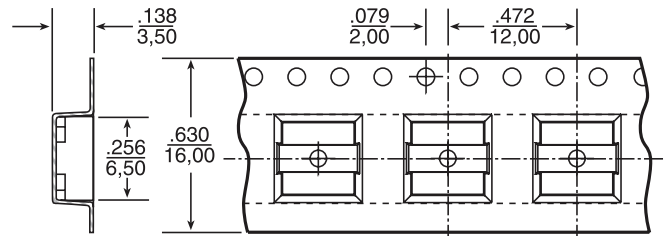


TAPE & REEL LAYOUT



Notes from Tables

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. Inductance at I_{rated} is typical inductance value for component taken at rated current.
3. The rated current listed is the lower of saturation current @ 25°C or heating current.
4. The saturation current, I_{sat} , is the current at which the the component inductance drops by 10% (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
5. The heating current, I_{DC} , is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes.
6. Testing done @ 100kHz, 100mV_{ac}
7. Add suffix "T" to part number for tape and reel packaging (i.e. PG0063.102NLT).

Inductance vs Current Characteristics

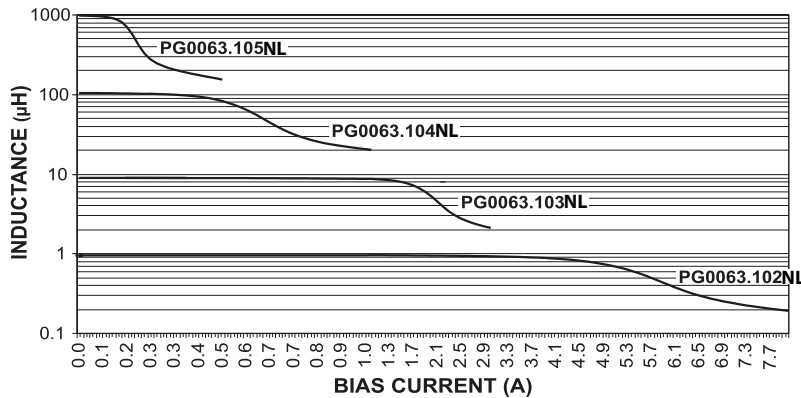

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technol-
ogy Bldg.
10th Kejian Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China
Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363
Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2015, Pulse Electronics, Inc. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Pulse manufacturer](#):

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)