





**Number of Contacts**  
9, 15, 21, 25, 31, 37

**Filter Class**  
A, B, C, D, E, F or G  
(See Table II)

**Hardware Option**  
**NN** - No Jackpost, No Threaded Insert  
**PN** - Jackpost, No Threaded Insert  
**NU** - Threaded Insert Only, No Jackposts  
**PU** - Jackpost and Threaded Insert

**Rear Panel Jackposts with Threaded Insert:**  
**R6U** - 0.125" (3.2) Panel  
**R5U** - 0.094" (2.4) Panel  
**R4U** - 0.062" (1.6) Panel  
**R3U** - 0.047" (1.2) Panel  
**R2U** - 0.031" (0.8) Panel

D

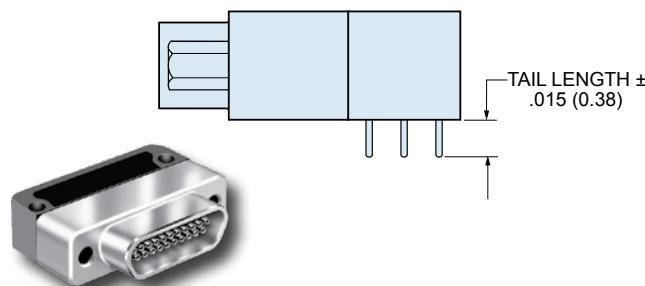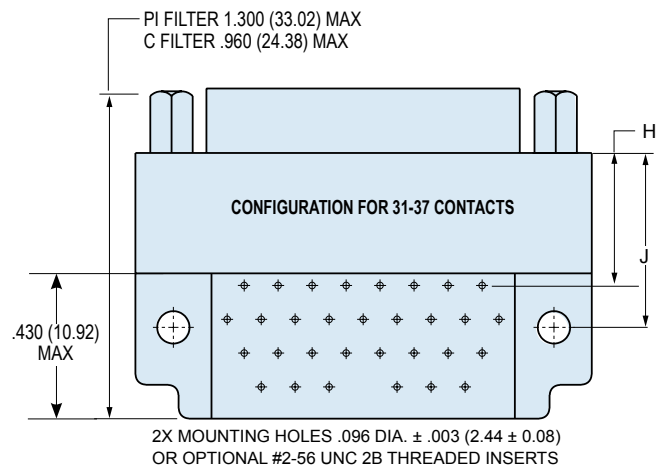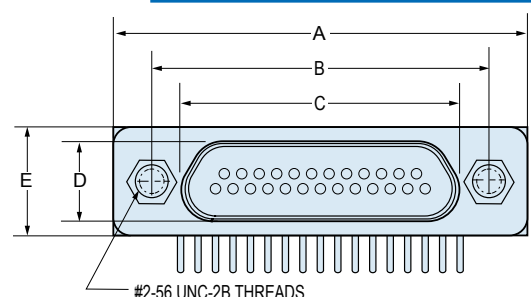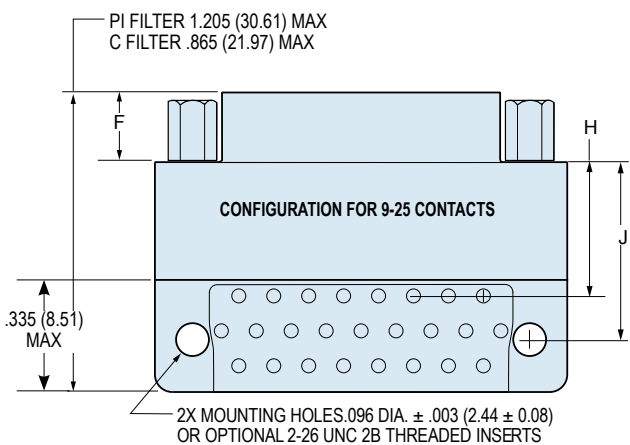

**Right Angle Board Mount Filtered Micro-D's.** These connectors feature low-pass EMI filtering in a right angle header for PCB termination.

**.100" x .100" Board Spacing**—These connectors are similar to "CBR" style Micro-D's and share the same board footprint, allowing retrofit to existing boards.

**240-034**  
**Micro-D Filter Connectors**  
**Right Angle Printed Circuit Board**



**TABLE I: SHELL FINISH**

SYM	MATERIAL	FINISH DESCRIPTION
1	Aluminum	Cadmium
2	Aluminum	Nickel
5	Aluminum	Gold
6	Aluminum	Chem Film
33	Aluminum	Ni-PTFE 1000 Hour Grey™

**TABLE II: CAPACITOR ARRAY CODE CAPACITANCE RANGE\***

CLASS	PI - CIRCUIT (pF)	C - CIRCUIT (pF)
A	38,000 - 56,000	19,000 - 28,000
B	32,000 - 45,000	16,000 - 22,500
C	18,000 - 33,000	9,000 - 16,500
D	8,000 - 12,000	4,000 - 6,000
E	3,300 - 5,000	1,650 - 2,500
F	800 - 1,300	400 - 650
G	400 - 600	200 - 300


**MICRO-D FILTER CLASSES AND PERFORMANCE**

Filter Class →	A	B	C	D	E	F	G									
<b>Capacitance, Picofarads (pF)</b>																
<b>C Filter</b>	19000-28000	16000-22500	9000-16500	4000-6000	1650-2500	400-650	200-300									
<b>Pi Filter</b>	38000-56000	32000-45000	18000-33000	8000-12000	3300-5000	800-1300	400-600									
<b>Insertion Loss, dB Minimum, 25° C.</b>																
Filter Type →	C		Pi		C		Pi		C		Pi		C		Pi	
<b>1 MHz</b>	6	10	5	8	3	5	—	1	—	—	—	—	—	—	—	—
<b>10 MHz</b>	24	40	23	35	16	25	8	14	4	8	—	2	—	—	—	0.8
<b>100 MHz</b>	41	62	39	60	35	57	28	50	21	40	10	15	5	13	—	—
<b>500-1000 MHz</b>	50	66	49	62	46	60	41	58	34	52	23	32	17	22	—	—


**MICRO-D FILTER RIGHT ANGLE PCB CONNECTORS**

Layout	A Max.		B		C Max.		D Max.		E Max.		F		G Max.		C Filter				Pi Filter			
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	H		J		H		J	
															±.010	±0.25	±.010	±0.25	±.010	±0.25	±.010	±0.25
<b>9P</b>	.785	19.94	.565	14.35	.333	8.46	.184	4.67	.310	7.87	.183	4.65	.420	10.67	.440	11.18	.460	11.68	.740	18.80	.760	19.30
<b>9S</b>	.785	19.94	.565	14.35	.400	10.16	.250	6.35	.310	7.87	.195	4.95	.420	10.67	.440	11.18	.460	11.68	.740	18.80	.760	19.30
<b>15P</b>	.935	23.75	.715	18.16	.483	12.27	.184	4.67	.310	7.87	.183	4.65	.420	10.67	.340	8.64	.460	11.68	.640	16.26	.760	19.30
<b>15S</b>	.935	23.75	.715	18.16	.551	14.00	.250	6.35	.310	7.87	.195	4.95	.420	10.67	.340	8.64	.460	11.68	.640	16.26	.760	19.30
<b>21P</b>	1.085	27.56	.865	21.97	.633	16.08	.184	4.67	.310	7.87	.183	4.65	.420	10.67	.340	8.64	.460	11.68	.640	16.26	.760	19.30
<b>21S</b>	1.085	27.56	.865	21.97	.701	17.81	.250	6.35	.310	7.87	.195	4.95	.420	10.67	.340	8.64	.460	11.68	.640	16.26	.760	19.30
<b>25P</b>	1.185	30.01	.965	24.51	.733	18.62	.184	4.67	.310	7.87	.183	4.65	.420	10.67	.340	8.64	.460	11.68	.640	16.26	.760	19.30
<b>25S</b>	1.185	30.01	.965	24.51	.801	20.35	.250	6.35	.310	7.87	.195	4.95	.420	10.67	.340	8.64	.460	11.68	.640	16.26	.760	19.30
<b>31P</b>	1.335	33.91	1.115	28.32	.883	22.43	.184	4.67	.310	7.87	.183	4.65	.520	13.21	.340	8.64	.460	11.68	.640	16.26	.760	19.30
<b>31S</b>	1.335	33.91	1.115	28.32	.951	24.16	.250	6.35	.310	7.87	.195	4.95	.520	13.21	.340	8.64	.460	11.68	.640	16.26	.760	19.30
<b>37P</b>	1.485	37.72	1.265	32.13	1.033	26.24	.184	4.67	.310	7.87	.183	4.65	.520	13.21	.340	8.64	.460	11.68	.640	16.26	.760	19.30
<b>37S</b>	1.485	37.72	1.265	32.13	1.101	27.96	.250	6.35	.310	7.87	.195	4.95	.520	13.21	.340	8.64	.460	11.68	.640	16.26	.760	19.30


**PC Tail Diameter  $.018 \pm .002$  ( $0.46 \pm 0.05$ )**  
**Contact numbers shown are for pin connectors.**  
**Patterns shown are for connector mounting side of PC board.**

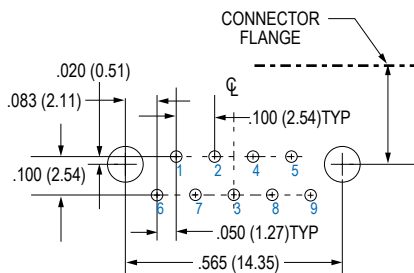


**9 Contacts**

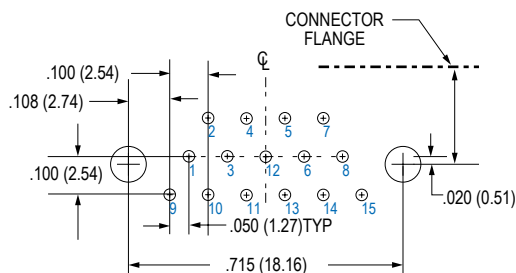


**15 Contacts**

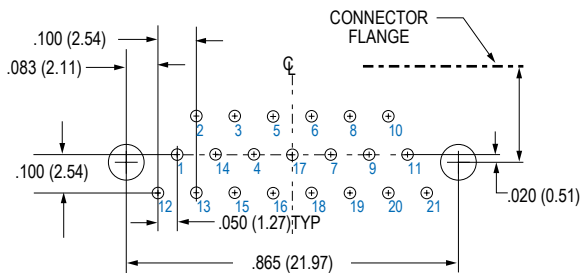


**21 Contacts**

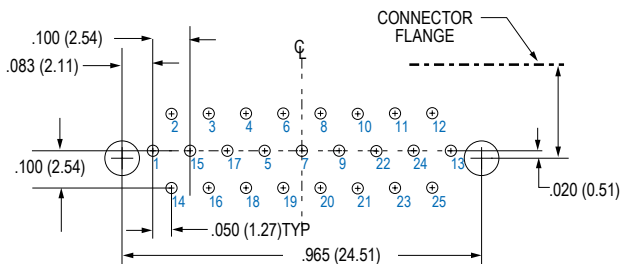

**25 Contacts**

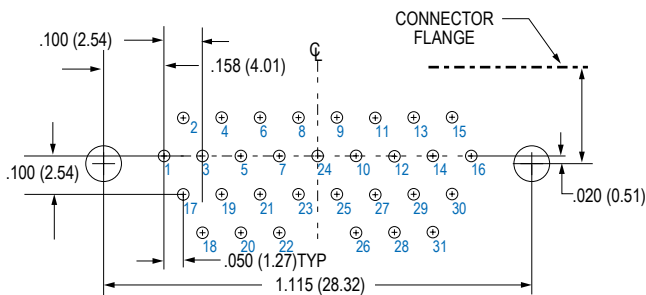

**31 Contacts**

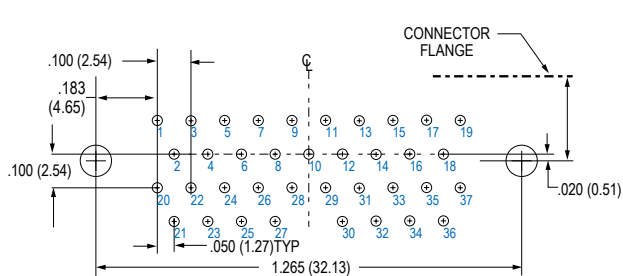


**37 Contacts**

**240-034**  
**Micro-D Filter Connectors**  
**Right Angle Printed Circuit Board Layouts**  
**Socket Connector**




Micro-D  
Connectors


**PC Tail Diameter  $.018 \pm .002$  ( $0.46 \pm 0.05$ )**  
**Contact numbers shown are for socket connectors.**  
**Patterns shown are for connector mounting side of PC board.**

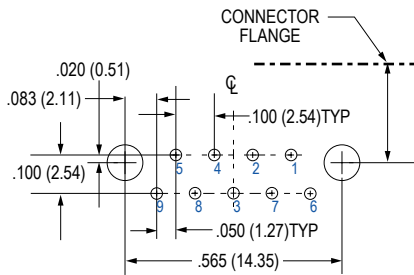


**9 Contacts**

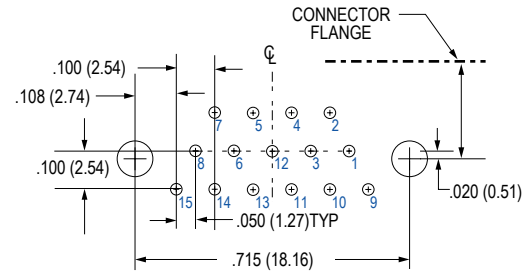


**15 Contacts**

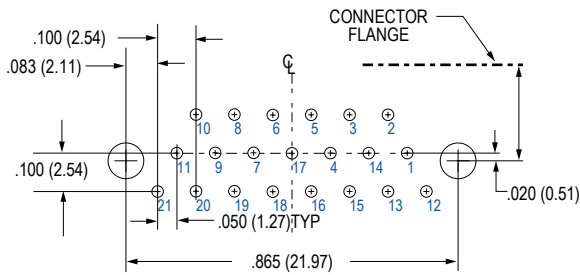


**21 Contacts**

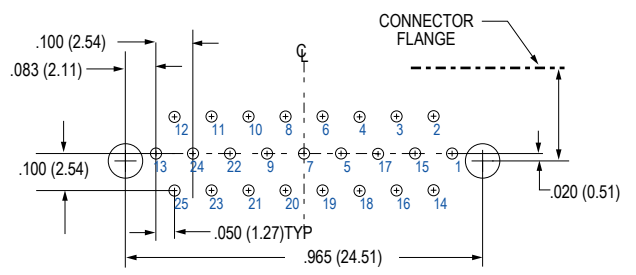

**25 Contacts**

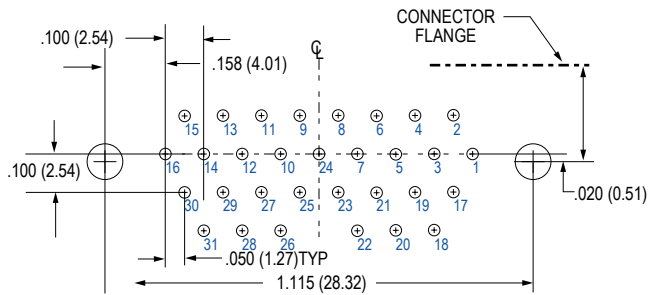

**31 Contacts**

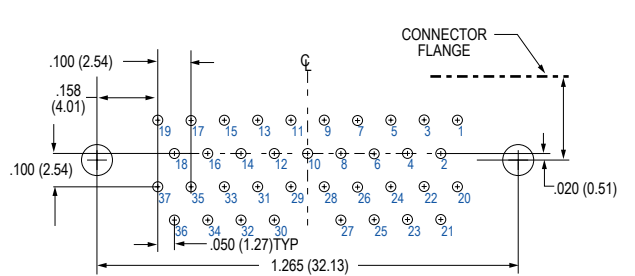

**37 Contacts**

**D**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub Standard Connectors](#) category:*

*Click to view products by [Glenair](#) manufacturer:*

Other Similar products are found below :

[DCM37S732N](#) [DAM15P500](#) [DEV09S364GTLF](#) [DEM09P032N](#) [DDM50P732N](#) [DAM15S332N](#) [173109-2218](#) [173109-2466](#) [173109-2436](#)  
[173109-2435](#) [56F706-005-LI](#) [56F711-015](#) [015-0341-000](#) [015-0372-008](#) [015-8544-011](#) [017041-0005](#) [020419-0104](#) [012-0515-000](#) [012-9507-](#)  
[034](#) [012-9507-114](#) [012-9534-001](#) [020745-0008](#) [609-25P](#) [M24308/2-23Z](#) [M243082310F](#) [M243082410F](#) [M243082411F](#) [M24308/4-21](#)  
[CT1A18-11PSA206](#) [CT1N36-5SC](#) [CT2-16S-17PS](#) [CT2-20-15PCAU](#) [CT2-24-12PS](#) [CT2-24-28PSF127A206](#) [CT2-32-9PC](#) [CT6F9767-14-4-](#)  
[14S-5PC](#) [CT6FA10SL-4PS](#) [CT7-18-10SC](#) [CT7-18-10SCAU](#) [CT7-18-12SCAU](#) [CT7-18-1PC](#) [CT7-18-1PCAU](#) [CT7-18-21SCAU](#) [M83513/01-](#)  
[FC](#) [M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [69001-865](#) [6STD09PCM99B70X](#) [6STD09SCM99B30X](#) [6STD09SCT99S40X](#)