
# **Digital linear actuators**

The 26DBM series comprise two versions. Both types are based on 4 phase permanent magnet stepper motor technology and utilise a rotor with an internal thread to provide linear motion via a leadscrew.


The L series are provided with a leadscrew which may be attached to the driven mechanism. When the leadscrew is prevented from rotating the operation of the motor imparts linear motion to the screw. The maximum travel of the mechanism is 48 mm although optional 300 mm long leadscrews may be purchased for an increased travel distance of 260 mm.

The K series incorporate a keyway in the actuator's output slideway thereby providing the spindle with linear motion. This design is ideal for driving spring loaded mechanisms over a maximum travel distance of 13 mm.

#### **Dimensions mm:**

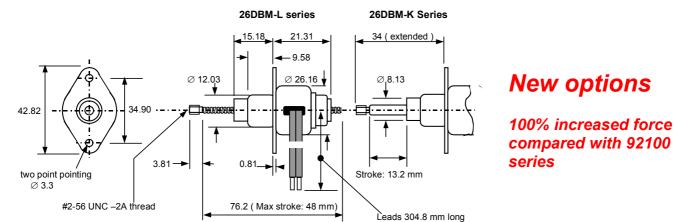

### **Performance:**

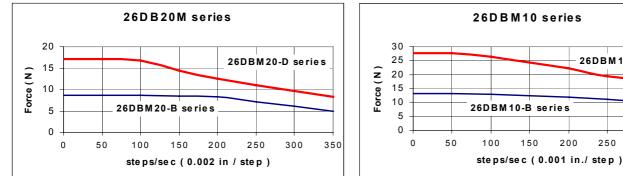

### Specification for uni-polar types

| Model       | Nominal | Linear travel per | Maximum travel  | Maximum | Min. de-energised | Nearest       |
|-------------|---------|-------------------|-----------------|---------|-------------------|---------------|
|             | Voltage | step              |                 | Force   | holding Force     | equivalent in |
|             | Vdc     | ins.(mm)          | mm              | N       | N                 | 92100 series  |
| 26DBM20B1U- | 5       |                   |                 | 8.9     | 2.8N              | 92121-P1      |
| 26DBM20B2U- | 12      | 0.002 ( 0.0508 )  | 13.2 - K series |         |                   | 92121-P2      |
| 26DBM20D1U- | 5       |                   | 48 - L series   | 17.8    | 8.3               |               |
| 26DBM20D2U- | 12      |                   |                 |         |                   |               |
| 26DBM10B1U- | 5       |                   |                 | 13.3    | 13.9              | 92111-P1      |
| 26DBM10B2U- | 12      | 0.001 ( 0.0254 )  | 13.2 - K series |         |                   | 92111-P2      |
| 26DBM10D1U- | 5       |                   | 48 - L series   | 28.1    | 27.8              |               |
| 26DBM10D2U- | 12      |                   |                 |         |                   |               |
| ▲ ▲         |         |                   |                 |         |                   |               |

Insert 'K' for keyway version Insert 'L' for leadscrew version

**Electrical Characteristic:** 

Resistance per phase Inductance per phase

Coil Data:

1U (5V) 14.6 Ohm 84 Ohm 5.2 mH 27.5 mH

2U(12V)

150

200

250







26DBM10-D series

300

350

Issue: 001

Mclennan Servo Supplies Ltd. Tel: +44 (0)8707 700 700 www.mclennan.co.uk

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for portescap manufacturer:

Other Similar products are found below :

 12G88-213E.1001
 22S28-205E.1
 16N1R78214E1005
 16G88-208E.1
 08G61-105.1
 22S28-208E.1
 16N78-210E.1001
 35NT2R32-416SP.1

 17N78213E1
 17N78-208E.1
 17S78-208P.1
 22S28-210P.1
 17N1R78213E1
 17S78-209E.1
 22N78313P1001
 13N88-110.1
 12G88-215E.1001

 16N78-212E.1001
 35GLT2R82-326P.1
 16G88-211E.1
 22N78-319P.1001
 22N78-311P.1001
 16N78-212P.1001
 16N28-207E.201
 16G88 

 220P.1
 16N78214E1001
 22V28-213E.201
 30GT2R82-234E.4
 16N28-210E.1
 13N88-213E.1
 16N78-208E.1001
 16N78-135.1001
 22N28 

 213E.286
 16N28-208E.202
 22N28-210E.286
 16G88-213E.1
 08GS61-105C.1
 13N88-216E.1