



Solid State Timers and Controllers

437


Delay-On-Make Timing Module



The Model 437 in-line delay-on-make timing module was originally developed for the telephone industry to solve the problem of slowing down the pick up time of one relay while another was being energized from the same signal. Ease of installation permits the model 437 to be connected in either leg of the relay or load circuit. When a DC operating voltage is applied only a small amount of current is permitted to flow through the load circuit. At the end of the delay


period, the model 437 turns on and energizes the load circuit. To recycle, remove the operating voltage for at least 50 milliseconds then re-apply. The model 437 can handle as much as 2 amperes continuously at any specified operating voltage from 5 to 200 volts DC.

Mechanical

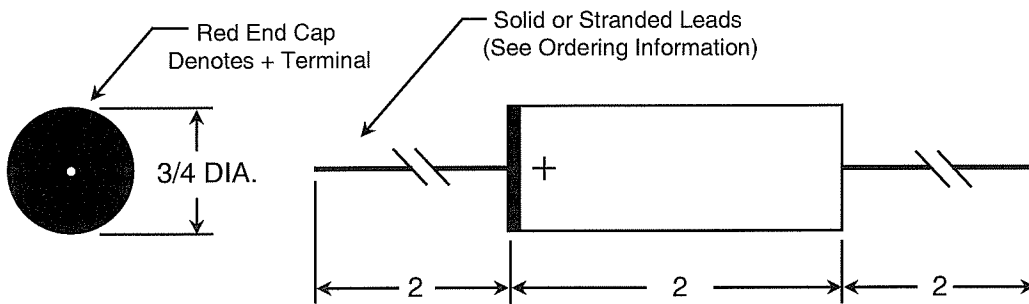


CASE STYLES
A & B

A - #20 Ga. Solid Wire (Shown) B - #20 Ga. (6") Stranded Wire

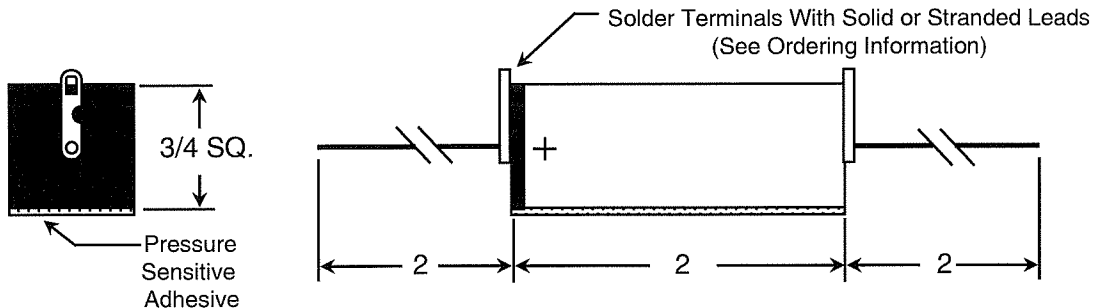

CASE STYLES
C & D

C - #20 Ga. Solid Wire & Solder Terminals (Shown)
D - #20 Ga. (6") Stranded Wire Without Solder Terminals

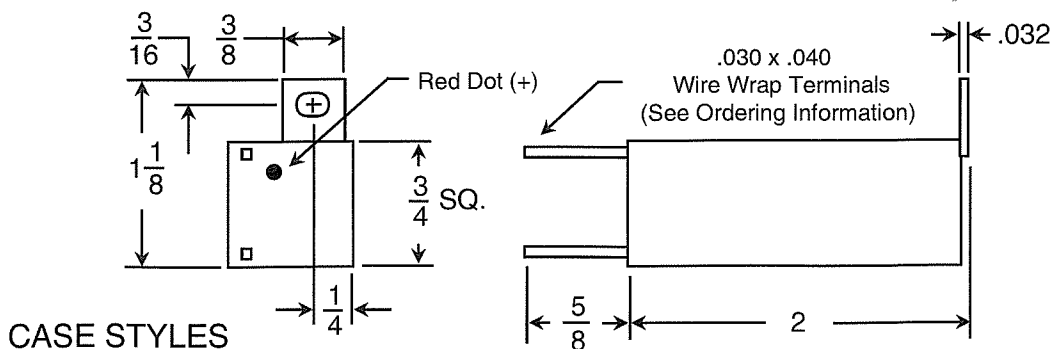

CASE STYLES
E & F

E - #20 Ga. Solid Wire (Shown) F - #20 Ga. (6") Stranded Wire

VISIT OUR WEB SITE AT: WWW.ARTISANCONTROLS.COM

Notice: Artisan Controls Corporation assumes no responsibility for customers applications or product design.



Artisan Controls Corporation,
111 Canfield Ave, Bldg B15-18, Randolph, New Jersey 07869, USA
Tel: 973-598-9400 • Fax: 973-598-9410 • Toll Free: 800-457-4950
website: www.artisancontrols.com




Solid State Timers and Controllers

Specifications

- Operating Voltage:** Any specified DC voltage from 5V DC to 200V DC.
- Voltage Tolerance:** ±20% at specified operating voltage.
- Timing Mode:** Delay-On-Make - load energizes after preset timing period.
- Fixed Timing:** Factory fixed at any timing period from 25 milliseconds to 600 seconds.
- Tolerances On Fixed Timing:** 10%.
- Timing Variation:** < 15% of set point over specified temperature and voltage range.
- Repeatability Of Timing Period:** ±5% nominal.
- Recycle Time:** 50 milliseconds after the timing period with the output ON, 2 seconds during a timing cycle while output is OFF.
- Output Rating:** 20 milliamperes to 2 amperes resistive or inductive with inrush currents to 25 amperes for 1 second.
- Output Switch Characteristics:** 2.2V DC voltage drop when ON, and 3mA leakage when OFF.
- Transient Protection:** 1000V transients for durations up to 10 milliseconds will not destroy the timer. Severe transients may cause the timer to turn on prior to the end of the fixed delay period.
- Inductive Load Warning:** Inductive loads present a very high resistance to the output switch at the instant of turn on and as a result may not latch. To assure turn on when operating into inductive loads connect a resistor across the load circuit to assure that the output switch will turn on. The value of the resistor is shown below in the *Wiring Diagram*.
- Operating Temperature:** -20°C to +85°C.
- Construction:** Six (6) case styles available.
- Data Sheet Revision Date:** June 3, 2000


Wiring Diagram

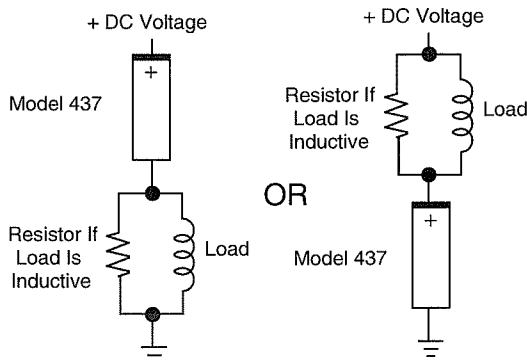

To Find Resistor Value For Inductive Load:

Resistor Value In Ohms = Operating Voltage / .02
 Ex: Operating Voltage = 48V DC Resistor = 48 / .02 = 2400 ohms.

Timing Diagram

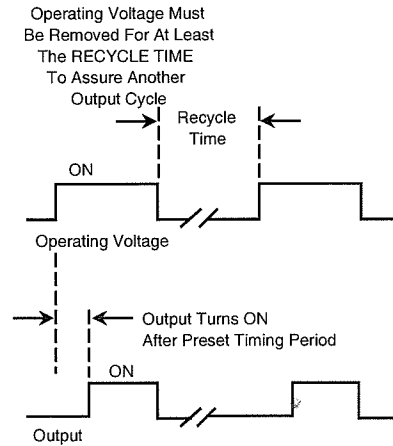

Ordering Information

| Part Number | Operating Voltage | Fixed Timing In Seconds | Case Style |
|-------------|---------------------|-------------------------|------------|
| 437 - | Specify The Nominal | Specify The Nominal | -A |
| | Operating Voltage | Time Delay Period | -B |
| | From | From | -C |
| | 5V DC to 200V DC | 25mS To 600 Seconds | -D |
| | | | -E |
| | | | -F |

VISIT OUR WEB SITE AT: WWW.ARTISANCONTROLS.COM

Notice: Artisan Controls Corporation assumes no responsibility for customers applications or product design.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [artisan controls manufacturer](#):

Other Similar products are found below :

[2600SA-8](#) [438A-115-1](#) [4970-2](#) [423-24-60FPM](#) [437-110-1A](#) [4210-115-60FPM](#) [438USAS](#) [438USA](#) [438U](#)