

PC Board Fuses Sub-Miniature with Leads

GFA, GLN, and GLX



Catalog Symbol: GFA

Sub-Miniature with Axial Leads

Non-Time-Delay

0.145" x 0.300" (3.7mm x 7.6mm)

Interrupting Rating: 50 AIC

Agency Approvals:

U.L. Recognized, (0-5A) Guide JDY22, File 19180

CSA Certified, (0-5A) File 53787, Class 1425-01

Electrical Ratings (Catalog Symbol and Amperes)

125 Volts AC

| Amps | Test Spec. | Color Code (Opp. Ends) | | Amps | Test Spec. | Color Code (Opp. Ends) | |
|-----------------------|------------|------------------------|-----|---------------------|------------|------------------------|-----|
| GFA- $\frac{1}{200}$ | A | Red | Blk | GFA- $\frac{3}{10}$ | A | Grn | Grn |
| GFA- $\frac{1}{100}$ | A | Red | Orn | GFA- $\frac{4}{10}$ | A | Blu | Blu |
| GFA- $\frac{1}{64}$ | A | Red | Grn | GFA- $\frac{1}{2}$ | B | Orn | Grn |
| GFA- $\frac{1}{50}$ | A | Red | Wht | GFA- $\frac{6}{10}$ | B | Orn | Blu |
| GFA- $\frac{1}{32}$ | A | Red | Brn | GFA- $\frac{3}{4}$ | B | Orn | Pur |
| GFA- $\frac{1}{20}$ | A | Yel | Yel | GFA-1 | B | Yel | Grn |
| GFA- $\frac{1}{16}$ | A | Brn | Brn | GFA-1 $\frac{1}{2}$ | B | Yel | Pur |
| GFA- $\frac{1}{10}$ | A | Red | Red | GFA-2 | B | Grn | Blu |
| GFA- $\frac{1}{8}$ | A | Orn | Orn | GFA-2 $\frac{1}{2}$ | B | Grn | Brn |
| GFA- $\frac{15}{100}$ | B | Red | Yel | GFA-3 | B | Blu | Pur |
| GFA- $\frac{3}{10}$ | B | Red | Blu | GFA-4 | B | Pur | Brn |
| GFA- $\frac{1}{4}$ | B | Red | Pur | GFA-5 | B | Brn | Blk |

32 Volts AC

| Amps | Test Spec. | Color Code (Opp. Ends) | | Amps | Test Spec. | Color Code (Opp. Ends) | |
|--------|------------|------------------------|-----|--------|------------|------------------------|-----|
| GFA-7 | A | Pur | Grn | GFA-12 | A | Blk | Blu |
| GFA-8 | A | Grn | Blk | GFA-15 | A | Blk | Pur |
| GFA-10 | A | Yel | Brn | — | | | |

Test Specifications

| Load | Opening Time | | No. | Fuse |
|------|---------------|----------------|-----|-----------------------|
| | "A" | "B" | | |
| 100% | 4 hrs. (min.) | — | 24 | $\frac{1}{200}$ to 5A |
| 150% | — | 10 sec. (max.) | 18 | 6 to 12A |
| 200% | 10 sec. | — | 16 | 15A |

Wire Lead Size

Carton Quantity and Weight

| Ampere Ratings | Carton Qty. | Weight* | |
|---------------------|-------------|---------|------|
| | | Lbs. | Kg. |
| $\frac{1}{200}$ -15 | 100 | 0.171 | 52.6 |

*Weight per carton.

General Information:

- Glass tube fuses for protection of subminiature devices.
- Tinned wire leads solder into circuit.
- Withstand high-shock and vibration.
- Color-coded for ampere rating.
- Axial leads (1 $\frac{1}{2}$ ") can be fed through wire forming machine.



Catalog Symbol: GLN

Sub-Miniature with Radial Leads

Non-Time-Delay

0.145" x 0.300" (3.7mm x 7.6mm)

Interrupting Rating: 50 AIC

Electrical Ratings (Catalog Symbol and Amperes)

125 Volts AC

| Amps | Test Spec. | Color Code (Opp. Ends) | | Amps | Test Spec. | Color Code (Opp. Ends) | |
|----------------------|------------|------------------------|-----|---------------------|------------|------------------------|-----|
| GLN- $\frac{1}{100}$ | A | Red | Orn | GLN- $\frac{1}{10}$ | A | Red | Red |
| GLN- $\frac{1}{32}$ | A | Red | Brn | GLN- $\frac{3}{10}$ | A | Grn | Grn |
| GLN- $\frac{1}{20}$ | A | Yel | Yel | GLN- $\frac{4}{10}$ | A | Blu | Blu |
| GLN- $\frac{1}{16}$ | A | Brn | Brn | — | | | |

32 Volts AC

| Amps | Test Spec. | Color Code (Opp. Ends) | | Amps | Test Spec. | Color Code (Opp. Ends) | |
|-------|------------|------------------------|-----|--------|------------|------------------------|-----|
| GLN-7 | A | Pur | Grn | GLN-10 | A | Yel | Brn |
| GLN-8 | A | Grn | Blk | — | | | |

Test Specifications

| Load | Opening Time | | No. | Fuse |
|------|---------------|-----------------|-----|-----------------------|
| | "A" | "B" | | |
| 110% | 4 hrs. (min.) | — | 24 | $\frac{1}{200}$ to 5A |
| 150% | — | *10 sec. (max.) | 18 | 6A to 10A |
| 200% | *10 sec. | — | — | — |

*Maximum time.

Wire Lead Size

Carton Quantity and Weight

| Ampere Ratings | Carton Qty. | Weight* | |
|---------------------|-------------|---------|------|
| | | Lbs. | Kg. |
| $\frac{1}{100}$ -10 | 100 | 0.171 | 52.6 |


*Weight per carton.

General Information:

- Glass tube fuses for protection of subminiature devices.
- Tinned radial leads spaced for easy assembly on printed circuit chassis.
- Withstand high-shock and vibration.
- Color-coded for ampere rating.
- Radial leads (1 $\frac{1}{2}$ ") can be fed through wire forming machine.

PC Board Fuses Sub-Miniature with Leads

GFA, GLN, and GLX

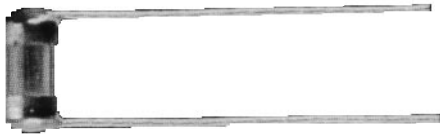

Catalog Symbol: GLX
Sub-Miniature with Radial Leads
Non-Time-Delay
0.145" x 0.300" (3.7mm x 7.6mm)
Interrupting Rating: 50 AIC

Electrical Ratings (Catalog Symbol and Amperes)
125 Volts AC

| Amps | Test Spec. | Color Code (Opp. Ends) | | Amps | Test Spec. | Color Code (Opp. Ends) | |
|-----------|------------|------------------------|-----|-------|------------|------------------------|-----|
| GLX-1/4 | B | Red | Pur | GLX-2 | B | Grn | Blu |
| GLX-1/2 | B | Orn | Grn | GLX-3 | B | Blu | Pur |
| GLX-3/4 | B | Orn | Pur | GLX-4 | B | Pur | Brn |
| GLX-1 | B | Yel | Grn | GLX-5 | B | Brn | Blk |
| GLX-1 1/2 | B | Yel | Pur | — | | | |

Wire Lead Size

| No. | Fuse |
|-----|-------------|
| 24 | 1/200 to 5A |

Carton Quantity and Weight


| Ampere Ratings | Carton Qty. | Weight* | |
|----------------|-------------|---------|------|
| | | Lbs. | Kg. |
| 1/4-5 | 100 | 0.171 | 52.6 |

*Weight per carton.

General Information:

- Glass tube fuses for protection of subminiature devices.
- Tinned radial leads spaced for easy assembly on printed circuit chassis.
- Withstand high-shock and vibration.
- Color-coded for ampere rating.
- Radial leads (1 1/2") can be fed through wire forming machine.

Time-Current Characteristics—Total Clear

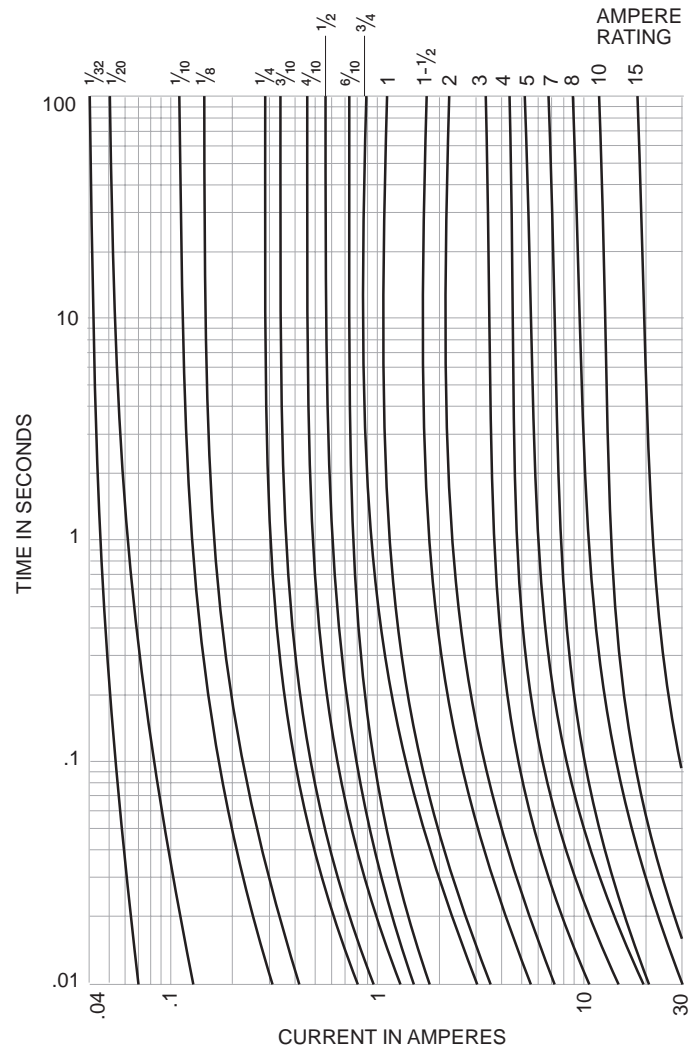

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.