


## KNIPEX Pen-Style Control Cabinet Key and Profi-Key

**NEW**



- Practical pen-style with fastening clip
- Swivel-out key profiles
- Sturdy construction for versatile application

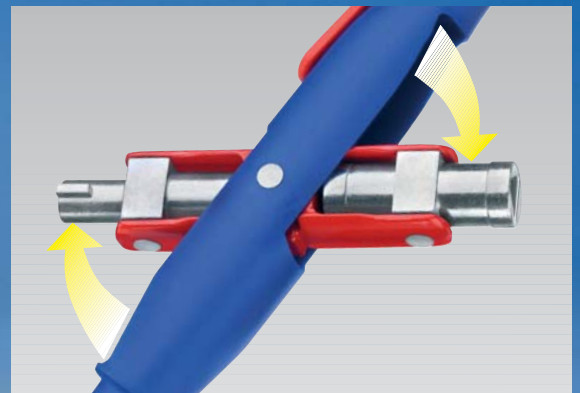



# 00 11

## Pen-Style Control Cabinet Key, for all standard cabinets and shut-off systems



00 11 07

- ▶ easy to carry pen-style control cabinet key with fastening clip
- ▶ four different key profiles can be utilized by swivelling the key holder
- ▶ for control cabinets and shut-off systems in the supply of gas, water and electricity
- ▶ for technical installations in buildings, e. g. air conditioning and ventilation systems, shut-off valves, mains switch-boards, etc.
- ▶ female square 5; 6 + 8 mm
- ▶ triangular 9 mm
- ▶ two-way key bit 5 mm dia. (internal) / 9 mm dia. (external)
- ▶ universal 1/4" bit adapter for standard bits (permanent magnet for retaining)
- ▶ additional bit adapter for 1/4" bits inside one key profile
- ▶ with bit insert: cross recess PH 2 and possibility of safekeeping a second bit
- ▶ practical clip for safe transport
- ▶ corpus and fastening clip made from GRP plastic material; tool holder and key profiles zinc diecast

Article No.	EAN-Code	Capacity			Length	g
		mm	mm	Ø mm		
00 11 07	063018	5/6/8	9	9	145	140



Opening a control cabinet with two-way key (Article No. 00 11 07)



Square for air bleeding (Article No. 00 11 07 + 00 11 08)



Tightening a screw with cross recess bit PH2 (Article No. 00 11 07 and 00 11 08)



Square in steps for opening a door without handle (Article No. 00 11 08)

# 00 11

## Pen-style Profi-Key, for all standard shut-off systems



00 11 08

- ▶ easy to carry pen-style control cabinet key with fastening clip
- ▶ three different key profiles can be utilized by swivelling the key holder
- ▶ multi-purpose key for the builder
- ▶ key for heating, air-conditioning, sanitary and building engineering, e. g. for door and window handles or for air bleeding heaters
- ▶ female square 5 + 8 mm
- ▶ triangular 9 mm
- ▶ male square in steps of 6 / 7 / 8 / 9 mm
- ▶ universal 1/4" bit adapter for standard bits (permanent magnet for retaining)
- ▶ additional bit adapter for 1/4" bits inside one key profile
- ▶ with bit insert: cross recess PH 2 and possibility of safekeeping a second bit
- ▶ practical clip for safe transport
- ▶ corpus and fastening clip made from GRP plastic material; tool holder and key profiles zinc diecast

Article No.	EAN-Code	Capacity			Length	g
		mm	mm	Ø mm		
00 11 08	063025	5 + 8	9	6/7/8/9	145	130

Distributed by:

L100 01738/01/09.06/5.000/GB

### KNIPEX-Werk C. Gustav Putsch KG

Oberkamper Straße 13  
42349 Wuppertal / Germany

Phone: +49(0)2 02/47 94-0  
Fax: +49(0)2 02/47 74 94

Internet: [www.knipex.de](http://www.knipex.de)  
E-Mail: [info@knipex.de](mailto:info@knipex.de)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Enclosures, Boxes, & Cases](#) category:*

*Click to view products by [Knipex](#) manufacturer:*

Other Similar products are found below :

[CR-425 PAINTED](#) [585-R-WH-PK](#) [M-10-PLATED](#) [60221-01](#) [60566-01-000](#) [HPL-9VB BATT DOOR](#) [M-16-LID-PLATED](#) [M18-PLTD](#) [M-21-LID-PLATED](#) [M-21-PLATED](#) [M-23-PLATED](#) [CU-281-MB](#) [6711GSKT](#) [71884-29-028](#) [LH45-100 Black](#) [7200B](#) [72868-510-000](#) [CNS-0000 Black](#) [72883-510-000](#) [CNS-0101 Black](#) [72906-510-000](#) [CNS-0407 Black](#) [73091-510-000](#) [CNM-0000-BLACK Kit](#) [73092-510-000](#) [CNM-0101 Black](#) [73108-510-000](#) [CNL-0303 Black](#) [73395-510-039](#) [CNS-0006 Bone](#) [74257-510-000](#) [CNL-0004](#) [MDC-1183-PLAIN-ALUM](#) [MDC-1183-PTD](#) [MDC-13104-PLAIN-ALUM](#) [MDC-211 - PAINTED IVORY/BEIGE](#) [MDC-321-PTD](#) [MDC-432-PLAIN-ALUM](#) [MDC-973-PTD](#) [76](#) [77153-01-028](#) [FLX6030](#) [83535-01-508](#) [PS-11296-G](#) [PS-11298-B](#) [116-508](#) [120-407](#) [120-412](#) [120-909](#) [120-455](#) [R272-100-000](#) [120-910](#) [R501-001-010](#) [R508-080-000](#) [R508-160-000](#) [R530-120-000](#) [R530-122-000](#) [R530-200-000](#) [R531-160-000](#) [R531-200-000](#) [R582-080-100](#)