



| 8 button membrane SW to OSD Control Board CN2 Pin Assignment | |
|--|---------------------------|
| pin # | description |
| 10 | Common Ground |
| 9 | Select Up |
| 8 | Select Down |
| 7 | Adjust Up/Increase/Right |
| 6 | Adjust Down/Decrease/Left |
| 5 | Menu |
| 4 | Brightness Down |
| 3 | Brightness Up |
| 2 | ON/OFF |
| 1 | Common Ground |

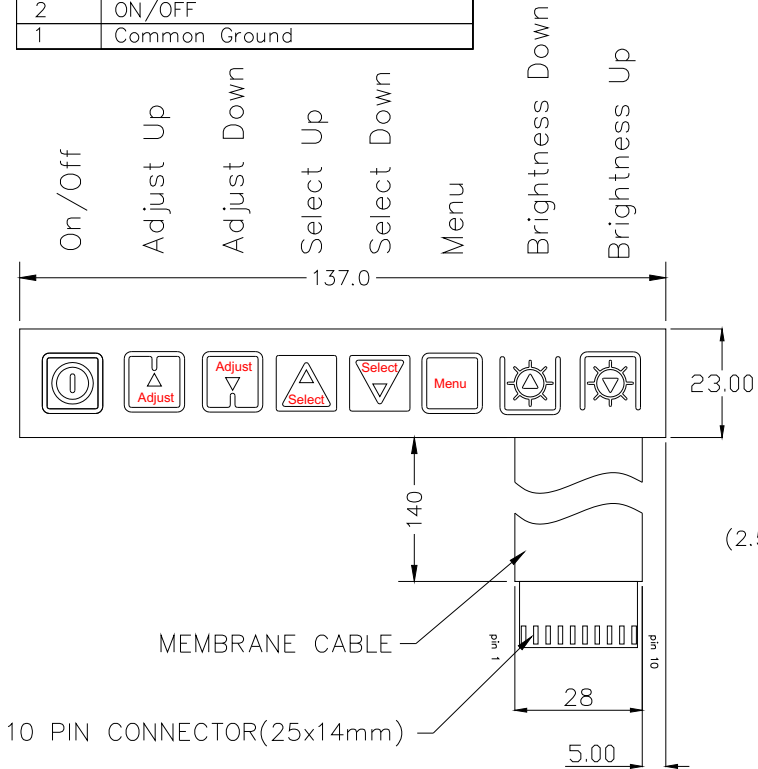

FRONT VIEW


Membrane Switch:
P/N:356301022-3

Membrane interface board
P/N 416100120-3 can operate
under 12VDC/24VDC power input
environment.

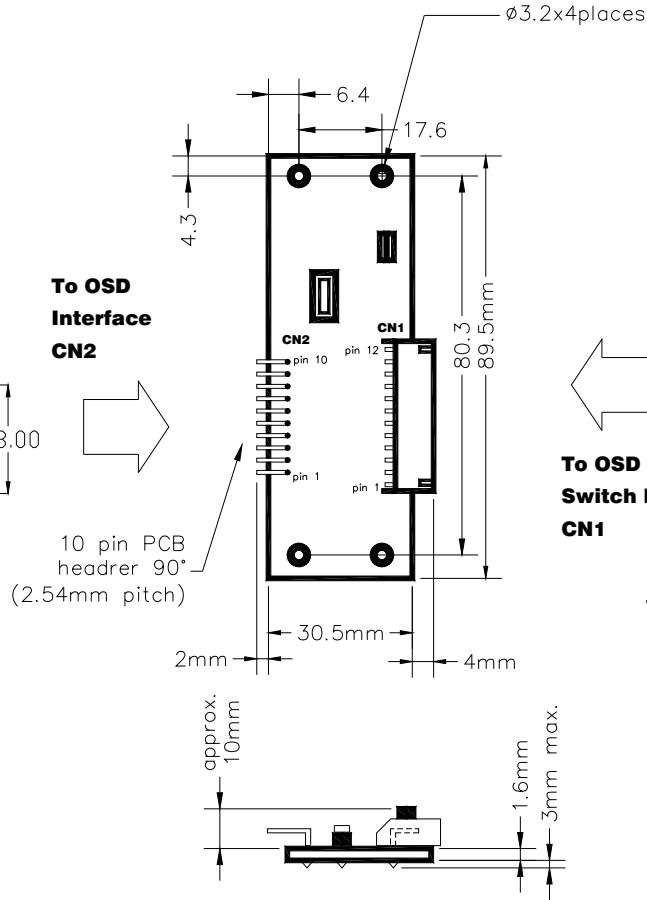

Membrane Interface Board:
P/N:416100120-3

| PCB OSD Control Board CN1 Pin Assignment | |
|--|--------------------------------|
| pin # | description |
| 12 | no connection |
| 11 | OSD Select UP |
| 10 | OSD Select Down |
| 9 | OSD Plus/Right |
| 8 | OSD Minus/Left |
| 7 | OSD Menu |
| 6 | Ground |
| 5 | Backlight Brightness VR pin B |
| 4 | Backlight Brightness VR pin WP |
| 3 | Backlight Brightness VR pin A |
| 2 | Power Switch B |
| 1 | Power Switch A |

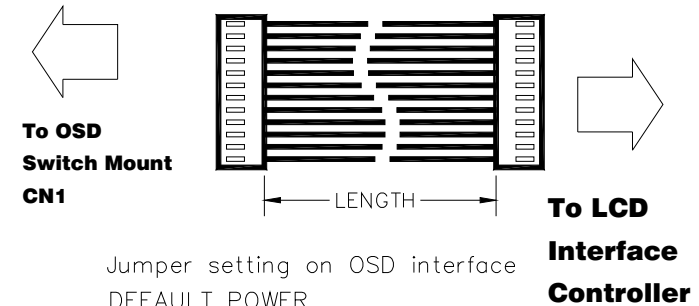

Jumper setting on OSD interface

DEFAULT POWER

JP1 : 1-2 closed - OFF

2-3 closed - ON

BRIGHTNESS INC/DEC SWITCH

JP2 : 1-3 & 2-4 closed - SWAP

1-2 & 3-4 closed - NORMAL

OSD cable:

P/N:426120410-3 (12/12 WAY), 610mm



Title:
KIT 60145-3 OSD KIT

NOTE:
All dimensions are in mm

Date:
30 JAN 08

Kit 60145-3 OSD KIT