

QUICK CONNECT (CO-AX)

The *ULTEMate* electrical connection solution for harsh environments.

Being constructed from Ultem®, a high temperature and corrosion resistant composite material, makes this the '*ULTEMate*' electrical connection solution. The Quick Connect series co-ax composite connector is chemical resistant and environmentally sealed up to IP68. It is ideal for the most rigorous applications.

FEATURES

- Quick latch mechanism
- Contacts use lock nut and soldered conductors
- Universal mounting
- Choice of cable gland & over moulding options
- Standard sealing O-ring
- Constructed from Ultem®, a high temperature resistant composite material
- Meets UL94 Class V-0 flammability requirements
- Can be sealed against dust and moisture up to IP68

BENEFITS

- Positive location
- No costly crimp tooling
- Flexible panel mounting of both halves
- Variety of options for maximum design-in flexibility
- Cost Effective
- O-ring's match design requirements
- Prevents mis-mating
- Key prevents damage to connector and cable
- Can be washed, sterilised and autoclaved without performance degradation
- Withstands heat, dust, moisture



GENERAL SPECIFICATION

Crimp contacts, insert / extraction tools, dust caps and back fittings

Materials

Shell / Insulators: Temperature and corrosion resistant composite, Ultem®

Contacts:

Back Fitting Options

Cable Gland: Strain Relief
Over-mould: Cable Sealing
Panel Nut: Universal Mount
Conduit Adapter: Wire management
Heat Shrink: One-stop-shop kit option

Recommended Cable

50 Ω URM 43/72/76/108, RG58C/U

75 Ω URM 41/56/70, T3242

Voltage: Up to 1000 Vac (rms)

Insulation Resistance: 1000 MΩ

Temperature Rating [connector]



-55°C to 150°C (The upper limit is the maximum internal hot-spot temperature resulting from the combination of ambient temperature and heating due to current)



DEUTSCH


Dimensions (mm)

	A	B	C	D
QC2	25	16	33	22.5



Envelope dimensions are for reference only.
Contact Deutsch Ltd if more detail is required.

Construction

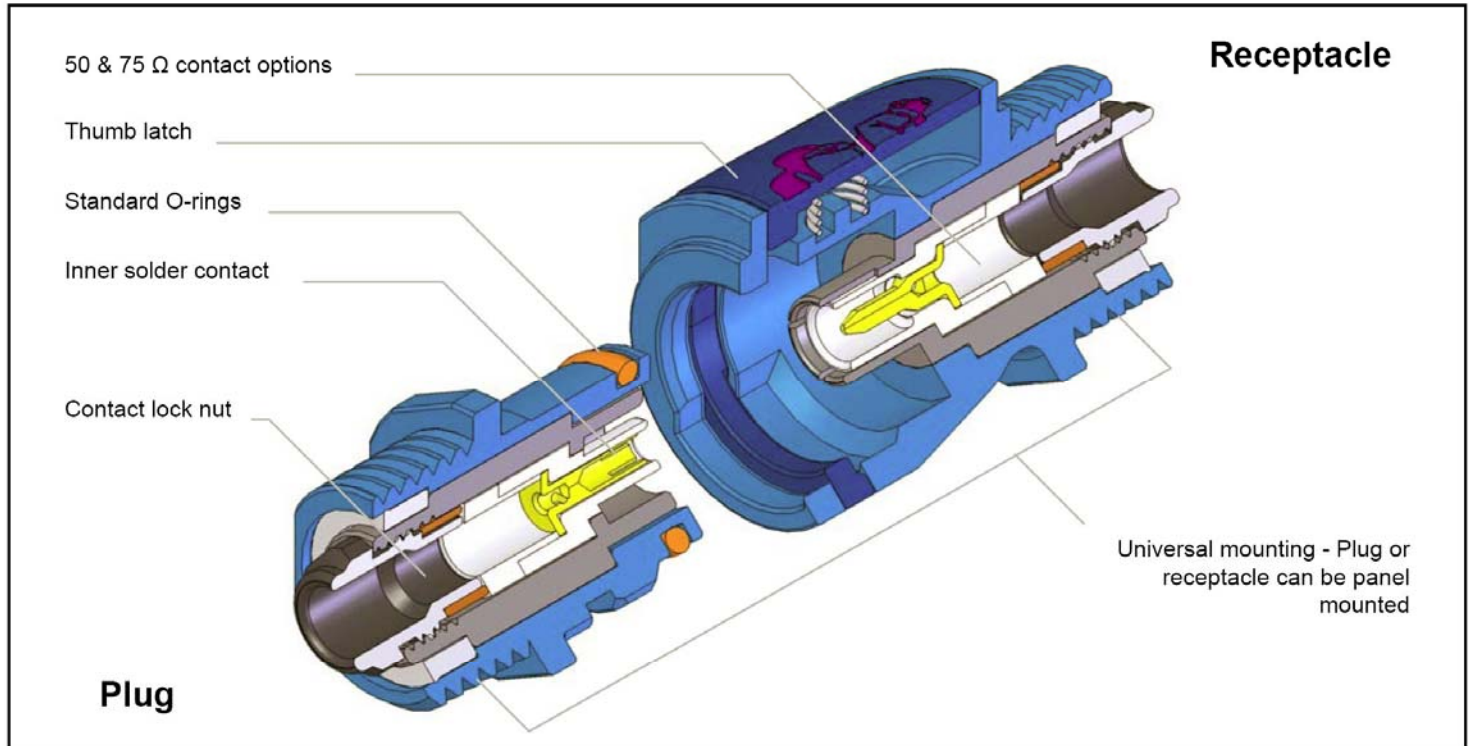

Ordering Information

Plug

Description
200 series in/lp 50Ω
200 series in/lp 75Ω

Part No.
QC26-5001S
QC26-7501S

Receptacle

Description
200 series in/lr 50Ω
200 series in/lr 75Ω

Part No.
QC24-5001P
QC24-7501P

Plug Sealing Cap

Description
200 series pro-cap

Part No.
IMC 29



A step ahead in technology

Castleham Industrial Estate
2 Stanier Road
St Leonards on Sea
East Sussex
TN38 9RP England
Telephone +44 (0) 1424 852722
Fax +44 (0) 1424 855979
Email industrial@deutsch.co.uk
www.deutschltd.com



DEUTSCH

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for te connectivity manufacturer:

Other Similar products are found below :

[570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1633138-8](#) [D38999/24FJ4AN](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [2EDL4CM](#)
[DTS20W19-11PD-3028](#) [DTS20W19-11PD-3028-LC](#) [DTS20W19-32SD-3028-LC](#) [DTS20W19-32SD-3028](#) [NC6-P104-06](#) [TXR64AB90-](#)
[3616AI](#) [DTS26F21-41HE](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [D38999/24WF32JE](#) [D38999/24WF32SE-LC](#)
[DTS24W19-32HE](#) [D38999/20JB35HA](#) [D38999/24WJ20PA](#) [164-8033-08](#) [D38999/24FF32JE](#) [D38999/24FF32SE-LC](#) [D38999/24WF32JB](#)
[D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [DTS24F19-32HE](#) [DTS20W19-32SA-3028-LC](#) [DTS24F19-](#)
[11SC-3028-LC](#) [DTS24F19-11SC-3028](#) [DJT14E13-98HB](#) [D38999/20WC8BB](#) [1-330599-5](#) [DTS24F21-41HN-LC](#) [DTS24F21-41HN](#)
[DTS24F21-41AN](#) [DTS24F21-39HN](#) [DTS24F21-41PN-LC](#) [AFD50-10-6SN-1A-LC](#) [DJT10F17-26HC](#) [DTS24W19-32HB](#) [ACT20JE99HA](#)
[DJT10E17-26HC](#) [DJT10E17-26HN](#) [DJT10F17-26HA](#)