



# Ruggedized LED Panel Mount Indicator



CNX 480 and 482 Series offer a robust anodized aluminum body delivering NEMA 4 protection from the elements


## Applications

- instrument panels
- disinfection and sterilization environments
- transportation dashboards
- safety applications
- outdoor signage
- aircraft and military
- industrial machinery
- electrical control panels
- vending and gaming machines


## Key features

- designed for harsh and outdoor environments
- wide angle viewable
- low profile for anti-vandalism
- direct sunlight visibility
- resistant to shock and vibration
- ESD protection
- custom LEDs, lens and body colors available
- RoHS compliant

## Dimensions

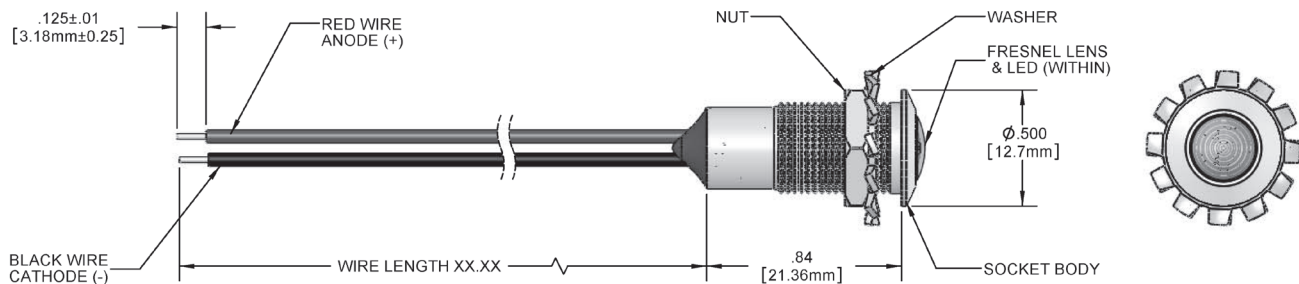

CNX480 without moisture-seal

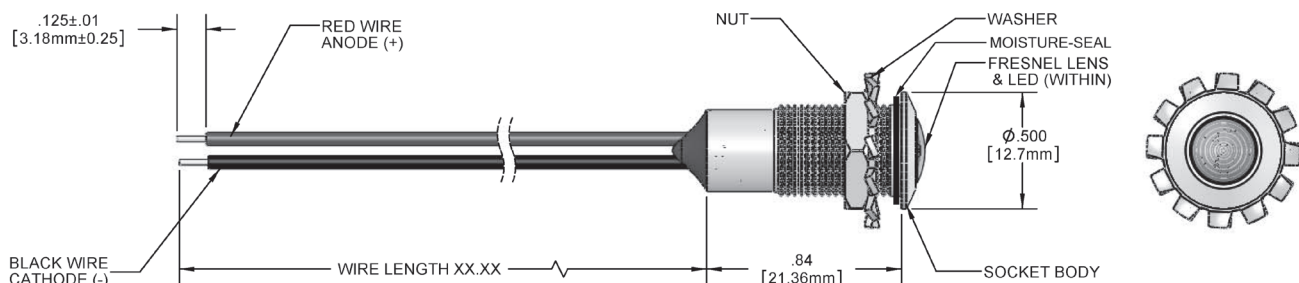

CNX482 with moisture seal

## Product specifications


LED output		
LED color**	typ intensity, mcd	forward voltage, V (typ)
red	245-345	1.8
green	345-485	1.9
white	3500-4900	2.8
blue	950-1300	3.0
yellow	280-380	1.9

Materials	
socket body	aluminum alloy
lens	polycarbonate, UL rating 94-V2
washer	steel, zinc plated, UL rating 94-V0
retaining nut	aluminum alloy
wire	24 AWG 1007/1569 red = anode(+) black = cathode (-)
moisture seal	EPDM

Installation specification	
mounting hole	.399±.004 (10.1mm±.1)
panel thickness	.059(1.5mm) min to .320 (8.1mm) max

Operating parameters	
operating temperature	-40°F (-40°C) to 176°F (80°C)
LED output current	20mA

## Ordering data

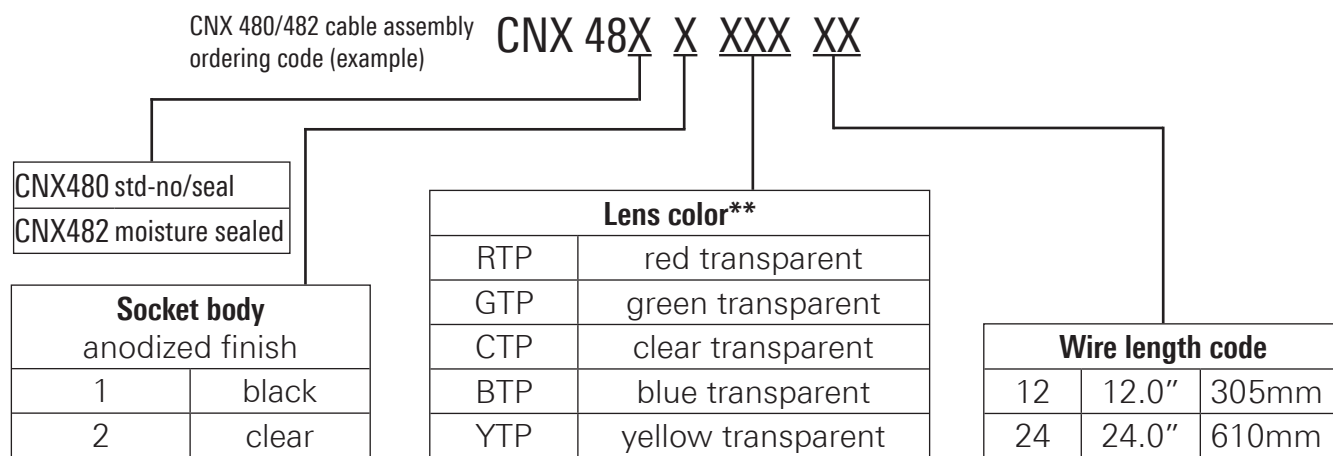

\*\*LED color same as the lens color.

Example: Red LED comes with a red lens.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Visual Communications](#) manufacturer:*

Other Similar products are found below :

[CNX722C40005W](#) [VAOM-C07573S9-BW/32](#) [2817](#) [139A-403A](#) [2191U5-24V](#) [25P-607W](#) [2620QK1](#) [LPC\\_127\\_CTP](#) [STD600BLK](#)  
[CMC01R](#) [CNXBE4218](#) [4344](#) [5314N1](#) [1092D3-28V](#) [VC1510145W3](#) [5110F1-5V](#) [B2A-10PK](#) [1052QN5](#) [CNX722C900120T](#) [PML50RFVW](#)  
[CNX"C"E"4"1"04](#) [1835LS3-W-CW](#) [2SB-NWG48H](#) [2SB-NWW48H](#) [2623T5](#) [CNX\\_310\\_220\\_E\\_4\\_1\\_08](#) [CNX310033X4124](#) [3150-10PK](#)  
[4304H5](#) [VC18602452](#) [L65DR12L](#) [CNX\\_410\\_220\\_X02\\_4\\_1\\_24](#) [LFC063CTP](#) [PML50GFVW](#) [MF200-BCG28H](#) [STD\\_850\\_BLK](#) [2152QA5](#)  
[2153A5](#) [5302H5-5V](#) [CNX722C50024W](#) [CNX"482"1"RTP"12](#) [L79D-Y125-W](#) [5352T1-5VLC](#) [CNX722C900FVB](#) [6013M5](#)  
[CTHS15CIC06ALARM](#) [5602F5-5V](#) [1050A4](#) [5381H3](#) [CTHS15CIC07](#)