

COMPACT POWER RELAY

2 POLE - 30A (For Automotive Applications)

FBR51 Latching Series

■ FEATURES

- Magnetically latched PCB relay
 - Increased ambient temperature range up to 125C
 - Two coils with set and reset function
 - Reflow soldering capable
 - Two types of contact materials
 - RoHS compliant
- Please see page 4 for more information



■ PARTNUMBER INFORMATION

[Example] FBR51 N L 2 10 - W1 - RW
 (a) (b) (c) (d) (e) (f) (g)

(a)	Relay type	FBR51 : FBR51 Series
(b)	Enclosure	N : Plastic sealed type
(c)	Operating function	L : Latching type
(d)	Coil type	2 : Double coil
(e)	Coil rated voltage	10 : 10VDC
(f)	Contact material	W1 : AgSnO ₂ E : AgNi
(g)	Mounting process	RW : Surface mount capable (P.I.P.)

* E (AgNi) versions used for special low current applications that require lower contact resistance (dark current applications)

E.g.: Ordering code:FBR51NL210-W1-RW

Actual marking: 51NL210-W1-RW

FBR51 SERIES

■ SPECIFICATION

Item	W1 contact		E contact
Contact Data	Configuration		1 Form C
	Material		AgSnO ₂ AgNi
	Resistance		Max. 50mOhm at 2A, 12VDC
	Contact rating		25A at 14VDC (locked motor load)
	Max. carrying current		30A / 1 hour (25 °C, 100% rated coil voltage)
	Max. switching voltage (reference)		16VDC
	Max. switching current (reference)		35A
Life	Mechanical		Min. 1 x 10 ⁶ operations
	Electrical		Min. 200 x 10 ³ operations 14VDC 25A inrush power window motor (1 operation: 1 forward and 1 reverse)
Coil Data	Rated power (20 °C)		1.11 W
	Operate power (20 °C)		0.44 W
	Operating ambient temperature range		-40 °C to +125 °C (no frost)
Timing Data	Set/Reset (at nominal voltage)		Max. 5 ms (without bounce)
	Coil excitation		Min. 20 ms, max. 1 min.
Insulation	Resistance		Min. 100 MOhm at 500VDC
	Dielectric strength	Open contacts	500 VAC (50/60 Hz) 1 min.
		Coil and contacts	500 VAC (50/60 Hz) 1 min.
Other	Vibration resistance	Misoperation	10-55Hz, 1.5mm double amplitude
	Shock resistance	Misoperation	100m/s ² minimum (10G)
		Endurance	1,000m/s ² minimum (100G)
	Weight	Approximately 6 g	
Sealing	Plastic sealed RT III		

■ COIL RATING




Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Set Voltage (VDC) *	Reset Voltage (VDC)
10	10	90 (x 2)	6.3	6.3
			8.9 (at 125 °C)	8.9 (at 125 °C)

Note: All values in the table are valid for 20°C and zero contact current, unless otherwise indicated.


* Specified operate values are valid for pulse wave voltage.

FBR51 SERIES


■ DIMENSIONS

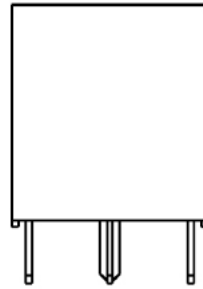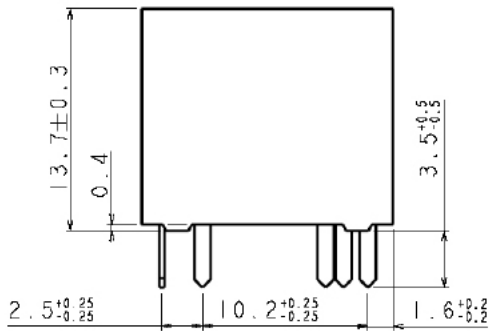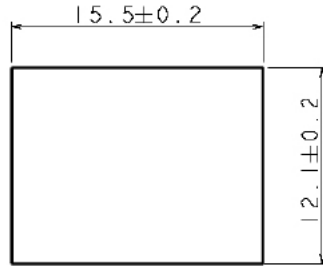

Schematics (Bottom View)

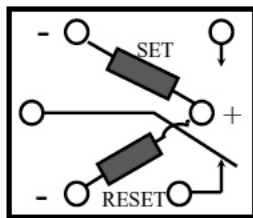

PC board mounting hole layout

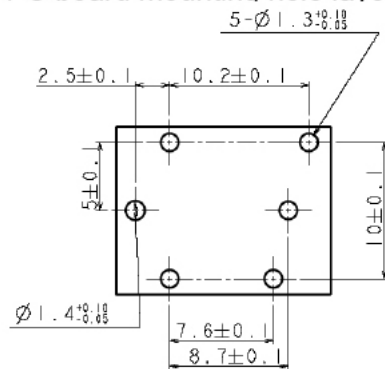

RoHS Compliance and Lead Free Information

1. General Information

- All automotive relays produced by Fujitsu Components are compliant with RoHS directive 2002/95/EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All our automotive relays are lead-free.
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

2. Recommended Lead Free Solder Profiles

- Recommended solder Sn-3.0Ag-0.5Cu.

Flow Solder condition:


Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at 260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

Recommended Reflow-Soldering profile

For lead free solder

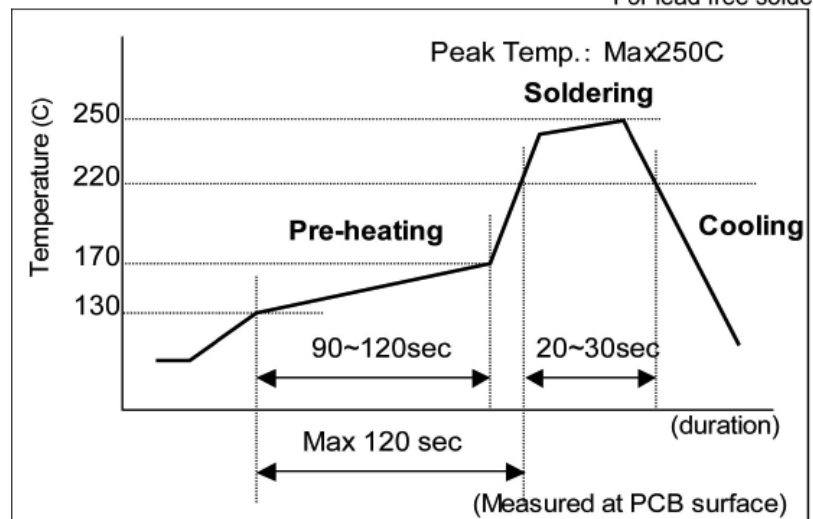

	Pre-heating	Soldering	Peak Temp.
Temperature	130~170C	220~Peak~220C	250C
Duration	90~120sec	20~30sec	-

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level: 2A. Relays are delivered in moisture barrier bags with MSL label.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 CitiLink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2011 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. January 11, 2011