



## Constant Current LED Driver

# **Model Number** AC-18CT350AGZ

Input Voltage: I20V

Input Frequency: 50/60Hz


Side Mount/Leads

## **ELECTRICAL SPECIFICATIONS:**

Output Power	Input Current	Input Power	Min PF (full load)	Max THD (full load)	Output Voltage	Output Current	T case Max	Min Starting Temp	Efficiency Up To	Dimming Protocol	TRIAC Dimming
18W	0.18A@120V	22W	>0.90	<20	36-5IV	350mA +/- 5%	75°C	0°C	83%	I20Vac Norm with Dimmer	100 to 1%

TRIAC DIMMING

### **WIRING:**

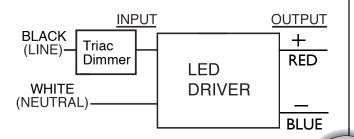

Lead Lo	Lead Lengths					
Black	5.9"	Blue	5.9"			
White	5.9"	Red	5.9"			

Dimmer Compatibility Chart on Back

## **PHYSICAL:**



Dimensions				
Length (L)	3.86"			
Width (W)	1.46"			
Height (H)	1.06"			
Mounting (M)	3.7"			

## **SAFETY:**

- UL and cUL Recognized, Class 2
- UL Outdoor Type I
- Class A sound rating
- Overload Protection
- Approved Dimmers:

- Open/Short Circuit Protection
- · LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- · LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C;
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

## **INSTALLATION:**

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required to use in installation
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded



\*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.

#### 3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.








Dimmer Compatibility					
Manufacturer	Dimming Type	AC-18CT350AGZ			
Lutron/Skylark SF-103P	LEADING	YES			
Lutron/Skylark S600P	LEADING	YES			
Lutron/Skylark DV-103P	LEADING	NO			
Lutron/NTLV-600	LEADING	YES			
Lutron/DVPDC-203P	LEADING	YES			
Lutron/DVCL-153P	LEADING	YES			
Leviton/IPI06	LEADING	YES			
Leviton/6633-P	LEADING	YES			
Leviton/6615-P	TRAILING	YES			
Leviton/6684	LEADING	NO			
Leviton/6613-P	LEADING	YES			
Leviton/RPI06	LEADING	NO			
Leviton/6674	LEADING	YES			


## **WORKS WITH LEADING EDGE AND TRAILING DIMMERS**

## **WIRING DIAGRAM**

## **Leading Edge Dimmer**



## **Trailing Edge Dimmer**



3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lighting Drivers category:

Click to view products by AC Electronics manufacturer:

Other Similar products are found below:

LV5235V-MPB-H MB39C602PNF-G-JNEFE1 FAN5701UMP20X FAN5702UMP30X MIC2871YMK-T5 MP1518DJ-LF-P MP3202DG-LF-P MP3304BDD-LF-P MP3306EG-LF-P MP3398AGY MP4033GK AL1676-10BS7-13 AL1676-20AS7-13 MX877RTR

NCL30085BDR2G ICL8201 IS31BL3506B-TTLS2-TR PAM2841GR A8519KLPTR-T FAN5701UMP08X FAN5702UMP20X AL3157F-7 AL8807BQMP-13 LV52204MTTBG MP2488DN-LF MP24893DQ-LF-P MP24894GJ-P MP24895GJ-P MP3308DL-LF-Z MP3393EF-LF MP3394SGF MP3802DQ-LF-P MP4008GS MP4031GS MP4032-1GS MP4034GS MP46885DN-LF SLG7NT4082V SLG7NT4082VTR PCA9955BTWQ900J TLD5095EL LED6001TR STP4CMPQTR BD1604MVV-E2 MC10SX1130DG MAX16832CASAT MAX16814CATP+ NCL30086BDR2G NCL30088BDR2G IS31LT3350-V1SDLS2-EB3CH