

Thermodata Components

High Barrier Terminal Strips

Technical Data

Number Of Ways	2 to 12
Current Rating	15 amps
Working Voltage	750 V d.c or a.c. peak
Insulation resistance	Greater than 10,000 megaohms
Temperature Range	-55°C to + 100°C



Materials and finishes

Moulding	High impact thermoplastic UL 94V-0 rated
Terminal Plates	Brass, nickel plated
Terminal Tags	Brass, tin plated
Screws	6/32 UNC Binder head, nickel plated


RoHS Compliant



Twin Terminals




Drop-Through Solder Terminals



Dimensions

Number Of Terminals	Mounting Hole Centers
2	28.6
3	38.1
4	47.6
5	57.2
6	66.7
7	76.2
8	85.7
9	95.2
10	104.8
11	114.3
12	123.8

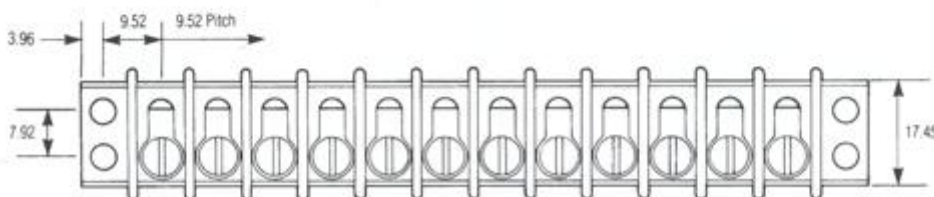

Ordering Information

Twin Terminals

Please quote part number

R44 18 000
↑↑
Specify number of ways

Drop Through Solder Terminals

Please quote part number

R44 25 000
↑↑
Specify number of ways

© Thermodata Components - All Rights Reserved
PO Box 140, Sandy, SG19 2WL.
Telephone: +44 (0) 1767 683697 Fax: +44 (0) 1767 683347
Email: sales@thermodata.co.uk

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [thermodata](#) manufacturer:

Other Similar products are found below :

[TC 44 25C 05](#) [TC 44 25C 09](#) [TC 44 18 09](#) [TC 44 18 10](#) [TC 44 25C 06](#) [TC 44 25C 08](#) [R44 00018 00 003 000](#) [R44 00045 00 000 000](#)