

CMZ5913B THRU CMZ5956B

**SURFACE MOUNT SILICON
ZENER DIODES
1.5 WATT, 3.3 THRU 200 VOLT
± 5% TOLERANCE**



SMA CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMZ5913B series 1.5 Watt surface mount silicon Zener diodes are highly reliable components designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications where small size is required. The SMA case occupies 30% less board space than the SMB case. To order devices on 12mm Tape and Reel (5000/13" Reel), add TR13 suffix to part number.

MARKING: SEE MARKING CODE ON ELECTRICAL CHARACTERISTIC TABLE

FEATURES:

- Super miniature case
- 200 Watts of TVS power
- ± 5% Tolerance
- Superior lot to lot consistency
- Low cost
- High reliability
- "C" bend construction provides strain relief when mounted on pc board

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)

Peak Forward Surge Current, tp=8.3ms
 Power Dissipation (T_L=75°C)
 Power Dissipation (Note 1)
 Peak Power Dissipation, tp=10x1000µs (T_L<25°C)
 Peak Power Dissipation, tp=8x20µs (T_L<25°C)
 Operating and Storage Junction Temperature
 Thermal Resistance
 Thermal Resistance (Note 1)

SYMBOL

I_{FSM} 20
 P_D 1.5
 P_D 0.5
 P_{PK} 200
 P_{PK} 1000
 T_J, T_{stg} -65 to +150
 θ_{JL} 50
 θ_{JA} 250

UNITS

A
 W
 W
 W
 W
 °C
 °C/W
 °C/W

ELECTRICAL CHARACTERISTICS: (T_A=25°C) V_F=1.5V MAX @ I_F=200mA (for all types)

| TYPE | ZENER VOLTAGE V _Z @ I _{ZT} | | | TEST CURRENT I _{ZT} | MAXIMUM ZENER IMPEDANCE | | | MAXIMUM REVERSE CURRENT | | MAXIMUM ZENER CURRENT (T _L =75°C) I _{ZM} | MARKING CODE |
|----------|---|-----|-------|---------------------------------|-----------------------------------|-----------------------------------|------|---------------------------------|-----|--|--------------|
| | MIN | NOM | MAX | | Z _{ZT} @ I _{ZT} | Z _{ZK} @ I _{ZK} | | I _R @ V _R | | | |
| | V | V | V | | | Ω | Ω | | mA | | |
| CMZ5913B | 3.135 | 3.3 | 3.465 | 113.6 | 10 | 500 | 1.0 | 100 | 1.0 | 454 | C5913B |
| CMZ5914B | 3.420 | 3.6 | 3.780 | 104.2 | 9.0 | 500 | 1.0 | 75 | 1.0 | 416 | C5914B |
| CMZ5915B | 3.705 | 3.9 | 4.095 | 96.1 | 7.5 | 500 | 1.0 | 25 | 1.0 | 384 | C5915B |
| CMZ5916B | 4.085 | 4.3 | 4.515 | 87.2 | 6.0 | 500 | 1.0 | 5.0 | 1.0 | 348 | C5916B |
| CMZ5917B | 4.465 | 4.7 | 4.935 | 79.8 | 5.0 | 500 | 1.0 | 5.0 | 1.5 | 319 | C5917B |
| CMZ5918B | 4.845 | 5.1 | 5.355 | 73.5 | 4.0 | 350 | 1.0 | 5.0 | 2.0 | 294 | C5918B |
| CMZ5919B | 5.320 | 5.6 | 5.880 | 66.9 | 2.0 | 250 | 1.0 | 5.0 | 3.0 | 267 | C5919B |
| CMZ5920B | 5.890 | 6.2 | 6.510 | 60.5 | 2.0 | 200 | 1.0 | 5.0 | 4.0 | 241 | C5920B |
| CMZ5921B | 6.460 | 6.8 | 7.140 | 55.1 | 2.5 | 200 | 1.0 | 5.0 | 5.2 | 221 | C5921B |
| CMZ5922B | 7.125 | 7.5 | 7.875 | 50.0 | 3.0 | 400 | 0.5 | 5.0 | 6.0 | 200 | C5922B |
| CMZ5923B | 7.790 | 8.2 | 8.610 | 45.7 | 3.5 | 400 | 0.5 | 5.0 | 6.5 | 183 | C5923B |
| CMZ5924B | 8.645 | 9.1 | 9.555 | 41.2 | 4.0 | 500 | 0.5 | 5.0 | 7.0 | 165 | C5924B |
| CMZ5925B | 9.500 | 10 | 10.50 | 37.5 | 4.5 | 500 | 0.25 | 5.0 | 8.0 | 150 | C5925B |
| CMZ5926B | 10.45 | 11 | 11.55 | 34.1 | 5.5 | 550 | 0.25 | 1.0 | 8.4 | 136 | C5926B |

Notes: (1) Mounted on 2 inch square FR-4 PCB with minimum recommended SMA copper pad area.

R9 (24-April 2015)

CMZ5913B THRU CMZ5956B


**SURFACE MOUNT SILICON
ZENER DIODES
1.5 WATT, 3.3 THRU 200 VOLT
± 5% TOLERANCE**



ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^\circ\text{C}$) $V_F=1.5\text{V MAX @ } I_F=200\text{mA}$ (for all types)

| TYPE | ZENER VOLTAGE $V_Z @ I_{ZT}$ | | | TEST CURRENT I_{ZT} | MAXIMUM ZENER IMPEDANCE | | | MAXIMUM REVERSE CURRENT | | MAXIMUM ZENER CURRENT ($T_L=75^\circ\text{C}$) I_{ZM} | MARKING CODE |
|----------|---------------------------------|-----|-------|--------------------------|-------------------------|-------------------|---------------|-------------------------|-------|---|--------------|
| | MIN | NOM | MAX | | $Z_{ZT} @ I_{ZT}$ | $Z_{ZK} @ I_{ZK}$ | $I_R @ V_R$ | $I_R @ V_R$ | | | |
| | V | V | V | mA | Ω | Ω | μA | V | mA | | |
| CMZ5927B | 11.40 | 12 | 12.60 | 31.2 | 6.5 | 550 | 0.25 | 1.0 | 9.1 | 125 | C5927B |
| CMZ5928B | 12.35 | 13 | 13.65 | 28.8 | 7.0 | 550 | 0.25 | 1.0 | 9.9 | 115 | C5928B |
| CMZ5929B | 14.25 | 15 | 15.75 | 25.0 | 9.0 | 600 | 0.25 | 1.0 | 11.4 | 100 | C5929B |
| CMZ5930B | 15.20 | 16 | 16.80 | 23.4 | 10 | 600 | 0.25 | 1.0 | 12.2 | 94 | C5930B |
| CMZ5931B | 17.10 | 18 | 18.90 | 20.8 | 12 | 650 | 0.25 | 1.0 | 13.7 | 83 | C5931B |
| CMZ5932B | 19.00 | 20 | 21.00 | 18.7 | 14 | 650 | 0.25 | 1.0 | 15.2 | 75 | C5932B |
| CMZ5933B | 20.90 | 22 | 23.10 | 17.0 | 17.5 | 650 | 0.25 | 1.0 | 16.7 | 68 | C5933B |
| CMZ5934B | 22.80 | 24 | 25.20 | 15.6 | 19 | 700 | 0.25 | 1.0 | 18.2 | 63 | C5934B |
| CMZ5935B | 25.65 | 27 | 28.35 | 13.9 | 23 | 700 | 0.25 | 1.0 | 20.6 | 56 | C5935B |
| CMZ5936B | 28.50 | 30 | 31.50 | 12.5 | 26 | 750 | 0.25 | 1.0 | 22.8 | 50 | C5936B |
| CMZ5937B | 31.35 | 33 | 34.65 | 11.4 | 33 | 800 | 0.25 | 1.0 | 25.1 | 45 | C5937B |
| CMZ5938B | 34.20 | 36 | 37.80 | 10.4 | 38 | 850 | 0.25 | 1.0 | 27.4 | 42 | C5938B |
| CMZ5939B | 37.05 | 39 | 40.95 | 9.6 | 45 | 900 | 0.25 | 1.0 | 29.7 | 38 | C5939B |
| CMZ5940B | 40.85 | 43 | 45.15 | 8.7 | 53 | 950 | 0.25 | 1.0 | 32.7 | 35 | C5940B |
| CMZ5941B | 44.65 | 47 | 49.35 | 8.0 | 67 | 1000 | 0.25 | 1.0 | 35.8 | 32 | C5941B |
| CMZ5942B | 48.45 | 51 | 53.55 | 7.3 | 70 | 1100 | 0.25 | 1.0 | 38.8 | 29 | C5942B |
| CMZ5943B | 53.20 | 56 | 58.80 | 6.7 | 86 | 1300 | 0.25 | 1.0 | 42.6 | 27 | C5943B |
| CMZ5944B | 58.90 | 62 | 65.10 | 6.0 | 100 | 1500 | 0.25 | 1.0 | 47.1 | 24 | C5944B |
| CMZ5945B | 64.60 | 68 | 71.40 | 5.5 | 120 | 1700 | 0.25 | 1.0 | 51.7 | 22 | C5945B |
| CMZ5946B | 71.25 | 75 | 78.75 | 5.0 | 140 | 2000 | 0.25 | 1.0 | 56.0 | 20 | C5946B |
| CMZ5947B | 77.90 | 82 | 86.10 | 4.6 | 160 | 2500 | 0.25 | 1.0 | 62.2 | 18 | C5947B |
| CMZ5948B | 86.45 | 91 | 95.55 | 4.1 | 200 | 3000 | 0.25 | 1.0 | 69.2 | 16 | C5948B |
| CMZ5949B | 95.00 | 100 | 105.0 | 3.7 | 250 | 3100 | 0.25 | 1.0 | 76.0 | 15 | C5949B |
| CMZ5950B | 104.5 | 110 | 115.5 | 3.4 | 300 | 4000 | 0.25 | 1.0 | 83.6 | 13 | C5950B |
| CMZ5951B | 114.0 | 120 | 126.0 | 3.1 | 360 | 4500 | 0.25 | 1.0 | 91.2 | 12 | C5951B |
| CMZ5952B | 123.5 | 130 | 136.5 | 2.9 | 450 | 5000 | 0.25 | 1.0 | 98.8 | 11 | C5952B |
| CMZ5953B | 142.5 | 150 | 157.5 | 2.5 | 600 | 6000 | 0.25 | 1.0 | 114.0 | 10 | C5953B |
| CMZ5954B | 152.0 | 160 | 168.0 | 2.3 | 700 | 6500 | 0.25 | 1.0 | 121.6 | 9.0 | C5954B |
| CMZ5955B | 171.0 | 180 | 189.0 | 2.1 | 900 | 7000 | 0.25 | 1.0 | 136.8 | 8.0 | C5955B |
| CMZ5956B | 190.0 | 200 | 210.0 | 1.9 | 1200 | 8000 | 0.25 | 1.0 | 152.0 | 7.0 | C5956B |

SMA CASE - MECHANICAL OUTLINE

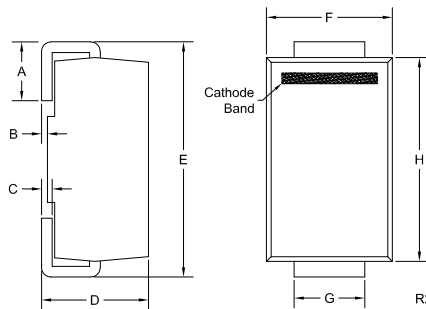

| SYMBOL | DIMENSIONS | | | |
|--------|------------|-------|-------------|------|
| | INCHES | | MILLIMETERS | |
| | MIN | MAX | MIN | MAX |
| A | 0.030 | 0.060 | 0.76 | 1.52 |
| B | 0.004 | 0.008 | 0.10 | 0.20 |
| C | 0.006 | 0.012 | 0.15 | 0.30 |
| D | 0.078 | 0.103 | 1.98 | 2.62 |
| E | 0.188 | 0.220 | 4.78 | 5.59 |
| F | 0.090 | 0.115 | 2.29 | 2.92 |
| G | 0.050 | 0.070 | 1.27 | 1.78 |
| H | 0.157 | 0.181 | 3.99 | 4.60 |

SMA (REV: R2)

R9 (24-April 2015)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [Central Semiconductor](#) manufacturer:

Other Similar products are found below :

[MMSZ5245BS-7-F](#) [RKZ13B2KG#P1](#) [RKZ5.6B2KJ#R1](#) [EDZTE6113B](#) [EDZTE6116B](#) [EDZTE616.8B](#) [1N747A](#) [1N966B](#) [NTE5116A](#)
[NTE5121A](#) [NTE5139A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5156A](#) [NTE5164A](#) [JANS1N4974US](#) [SMAJ4764A-TP](#) [RKZ5.1BKU#P6](#)
[3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#) [3SMBJ5920B-TP](#) [3SMBJ5925B-TP](#) [TDZTR24](#) [441774C](#) [MMSZ4678-TP](#) [MMSZ5232BQ-13-F](#)
[BZG04-36](#) [BZG05C9V1-HE3-TR](#) [HZM30NBTR-E](#) [UDZTE-175.1B](#) [3SMAJ5945B-TP](#) [3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DL4746A-TP](#)
[RKZ18B2KK#R1](#) [RKZ10B2KL#R1](#) [RKZ6.8B2KL#R1](#) [RKZ8.2B2KL#R1](#) [DZ2S240M0L](#) [SMAZ27-TP](#) [SMBZ5920B-E3/52](#) [ZMM3.0](#)
[RD16UM-T1-A](#) [RD39S-T1-A](#) [RD9.1S-T1-A](#) [RD10S-T1-A](#) [RD20S-T1-A](#) [RD2.2S-T1-A](#) [RD2.7UM-T1-A](#)