



Features


- Small Size
- Epoxy Sealed
- Standard Pin Spacing (0.1")
- PC Board Mount

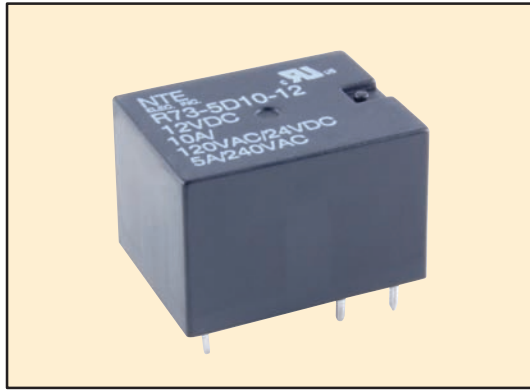


SPST-NO, 1 Form "A"



SPDT, 1 Form "C"



Mounting Holes
(Bottom View)



* Pin is omitted on SPST-NO devices

DC OPERATED


NTE Type No.	Nom. Volt.	Contact Arr.	Coil Res. ±10% Ohms (Typ)	Approx. Nom. Power	Max. Contact Cur. @ 28VDC or 120VAC	Diag No.
R73-1D10-3	3VDC	SPST-NO	20	450mW	10A	D49
R73-1D10-5/6	6VDC	SPST-NO	80	450mW	10A	D49
R73-1D10-12	12VDC	SPST-NO	320	450mW	10A	D49
R73-1D10-24	24VDC	SPST-NO	1280	450mW	10A	D49
R73-5D10-3	3VDC	SPDT	20	450mW	10A	D49
R73-5D10-5/6	6VDC	SPDT	80	450mW	10A	D49
R73-5D10-12	12VDC	SPDT	320	450mW	10A	D49
R73-5D10-24	24VDC	SPDT	1280	450mW	10A	D49
R73-5D10-48	48VDC	SPDT	3800	450mW	10A	D49

R73 Series



Subminiature, PC Mount, 10 Amp, SPST-NO & SPDT Relay, for Security and Telecommunication Equipment.

D49

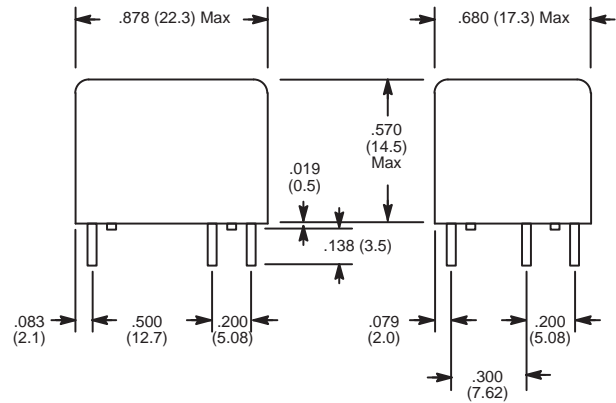

Electrical Specifications

Contact

Rating: 10 Amp @ 120VAC/28VDC
Material: Silver cadmium oxide
Resistance: 0.06± (At Nominal Conditions)

Coil

Coil Voltages: See Chart
Pick-up Voltages: 75% max of rated voltage
Drop-out Voltages: 10% min of rated voltage
Resistance: See Chart

Operational Characteristics

Timing Value: **Operate Time:** 5 mS max
Release Time: 10 mS max

Insulation Characteristics

Dielectric Strength
Between Contact and Coil: 1500 VAC
Between Contacts: 750 VAC
Insulation Resistance: 100M±

Environmental Characteristics

Operating: -55°C to +85°C

Life

Mechanical: 100,000 operations
Electrical: 10,000,000 operations

Weight

Std: 0.39 oz (11 grams) approx.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)