

# Modulostar® CMS10

## Modular fuse-holders

### IEC Cylindrical Fuse Holders

The innovative and comprehensive Modulostar® range of Mersen fuse-holders. Modular fuse-holders are finger-safe under IEC standards to an IP20 grade of protection, including fuse changing (with the flick of a finger). Modular fuse-holders are available in 1, 2, 3 or 4 poles, with or without visual blown fuse indicator, in IEC version or IEC + UL version. Multi-pole units can also be field assembled by ordering pin-ties assembly kit. In size 14 or 22, the range also offers the possibility to use microswitches (supplied with the holders or ordered separately) to allow remote indication. Modulostar® range is made of tough and durable thermoplastic or thermoset material.

#### Features Benefits

- Finger safe
- Degree of protection: IP20
- Optional visual blown fuse indicator
- DIN rail mounting
- Modular design
- Lockable
- Multi-pole assembly kit available
- Sealable in closed and open position
- Plastic material UL94V2 mini
- Flame retardant materials with glow wire flammability index to 960°C
- Schock and vibration tested for marine and railway applications

#### Applications

- All circuits up to 690V for protection of motors, transformers, low voltage distribution, control circuits, drive protection
- Non-load operation

#### Technical data overview


Voltage AC	690 VAC
Voltage DC	690 VDC
Amper (A)	32 A
SCCR	200kA
Mounting	Installation on to DIN rails to EN 60715
Product Size	For cylindrical fuse links 10.3x38.1 AM, gG and 10.3x38 Mersen Protistor and HP6M fuse-links
Number of Poles	1 to 4 poles



#### Standards

IEC 60269-2 and IEC 60947-3  
Compliance  
RoHS Compliant  
Plastic material: NF 16101 & 16102  
Requirement 2 Compliant  
Shock and vibration tested for marine and railway applications





## Product range



CMS101



CMS102



CMS103



CMS103N




CMS101I

### Modulostar® fuse-holders for 10.3x38.1 fuse-links, without indicator

Catalog number	Reference number	Number of poles/ phases	Design	Weight	Package
CMS810N	D305006	N	CMS10 neutral conductor	65.8 g	12
CMS101	T305020	1	CMS10 single pole	61.3 g	12
CMS101N	V305021	1 + N	CMS10 single pole + neutral conductor	131.6 g	6
CMS102	W305022	2	CMS10 double pole	121.6 g	6
CMS103	X305023	3	CMS10 triple pole	197.5 g	4
CMS103N	Y305024	3 + N	CMS10 triple pole + neutral conductor	263.3 g	3
CMS104	Z305025	4	CMS10 quadruple pole	243.3 g	3

### Modulostar® fuse-holders for 10,3x38,1 fuse-links, with indicator

Catalog number	Reference number	Number of poles/ phases	Design	Weight	Package
CMS101I	A305026	1	CMS10 single pole	60.8 g	12
CMS101NI	B305027	1 + N	CMS10 single pole + neutral conductor	131.6 g	6
CMS102I	C305028	2	CMS10 double pole	121.6 g	6
CMS103I	D305029	3	CMS10 triple pole	182.5 g	4
CMS103NI	E305030	3 + N	CMS10 triple pole + neutral conductor	263.3 g	3
CMS104I	F305031	4	CMS10 quadruple pole	243.3 g	3



### Technical Data


	CMS10	CMS10I
Size	10x38	10x38
Number of poles/phases	1, 1+N, 2, 3, 3+N, 4	1, 1+N, 2, 3, 3+N, 4
Conventional free air thermal current with fuse links $I_{th}$	32 A	32 A
Power dissipation at $I_{th}$	3 W	3 W
Utilisation category	AC20B/DC20B	AC20B/DC20B
Rated insulation voltage $U_i$	690 V	690 V
SCCR	200 kA	200 kA
Rated impulse withstand voltage $U_{imp}$	6 kV	6 kV
Degree of protection	IP 20	IP 20
Voltage limit for blown fuse indicator	-	230 to 690V AC/DC
Indication System	-	with indicator
Connection	Max. tightening torque: 2.2Nm (19lbs.-in) Rigid wire = 1-16mm <sup>2</sup> (16-6AWG) Multistrand wire = 0.75-10mm <sup>2</sup> (18-8AWG) PZ2 or flat 5.5x1mm screw drivers recommended (max. diameter 6mm)	Max. tightening torque: 2.2Nm (19lbs.-in) Rigid wire = 1-16mm <sup>2</sup> (16-6AWG) Multistrand wire = 0.75-10mm <sup>2</sup> (18-8AWG) PZ2 or flat 5.5x1mm screw drivers recommended (max. diameter 6mm)
Operating temperature	-25°C to 60°C	-25°C to 60°C
Storage temperature	-25°C to 80°C	-25°C to 80°C
Vibration	Withstand on the 3 main axis*: Sinusoidal vibration testing according to IEC 60068-2-6 2 to 13Hz x= 1 mm peak 13 to 100Hz y= 0.7g peak according to french marine application Random vibration testing according to IEC 61373 Category 1 Class B	Withstand on the 3 main axis*: Sinusoidal vibration testing according to IEC 60068-2-6 2 to 13Hz x= 1 mm peak 13 to 100Hz y= 0.7g peak according to french marine application Random vibration testing according to IEC 61373 Category 1 Class B
Shock	Shock testing according to IEC 61373 Category 1 Class B Shock testing according to IEC 60068-2-27 15g/11ms/18 shocks	Shock testing according to IEC 61373 Category 1 Class B Shock testing according to IEC 60068-2-27 15g/11ms/18 shocks
	* for specific usage please contact us	* for specific usage please contact us

### Specific usage conditions

Ambient temperature	>20°C	30°C	40°C	50°C	60°C
Derating factor ( $I_e$ )	1	0.95	0.9	0.8	0.7


No of poles (side by side)	1 to 3	>= 4
Derating factor of current ( $I_{th}$ )	1	0.9

Nominal current of fuse-link gR	20 A	25 A	30 A	32 A
Max. operational current in fuse-holder	19 A	22 A	25 A	27 A
Cable wire section	2.5 mm <sup>2</sup>	4 mm <sup>2</sup>	6 mm <sup>2</sup>	6 mm <sup>2</sup>



## Dimensions

Dimensions in mm

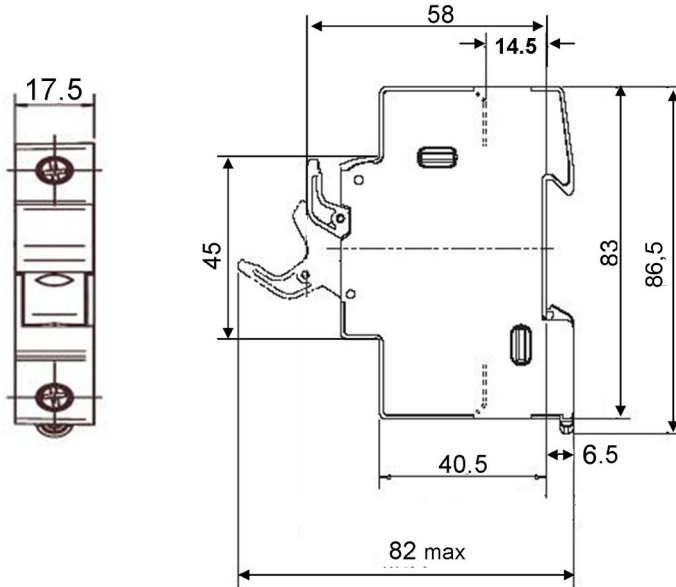

## Accessories



CMS8010PAK + fuse-holder

### Kit for multi phase connection

Catalog number	Reference number	Description	Weight kg <sup>1)</sup>	Package
CMS810PAK	Z233725	Links for connection of multipole units	0,00058	12



TAGLOCKCMS810




LOCK

### Locking devices

Catalog number	Reference number	Description	Weight kg <sup>1)</sup>	Package
TAGLOCKCMS810	A235773	Locking kit (Tag and lockout)	0.009	1
LOCK	M223525	Padlock	0.042	1

1) weight in kg per piece or set including package



## Accessories



TBB1A



TBB1C



TBB23A




TBB23C


### Power supply

Catalog number	Reference number	Description	Application	Weight kg <sup>1)</sup>	Package
TBB1A	D210315	1 phase axial incoming power supply	Max. rms current 90A	0.010	50
TBB1C	E210316	1 phase lateral incoming power supply	Max. rms current 90A	0.010	50
TBB23A	F210317	2 & 3 phases axial incoming power supply	Max. rms current 90A	0.023	50
TBB23C	G210318	2 & 3 phases lateral incoming power supply	Max. rms current 90A	0.023	50


### Wiring bars / Insulated bus bars




CMS810BB4F3



CMS810BB3F4



CMS810BB2F6



CMS810BB1F13

Catalog number	Reference number	Description	Application	Weight kg <sup>1)</sup>	Package
CMS810BB4F3	X210309	quadruple pole, 10 mm <sup>2</sup> , partition 17,5 mm (distance of poles), peg design, L-shaped	Max. rms current 100A, for installation of 3 modules	0.106	10
CMS810BB3F4	W210308	triple pole, 10 mm <sup>2</sup> partition 17,5 mm (distance of poles), peg design, L-shaped	Max. rms current 100A, for installation of 4 modules	0.085	10
CMS810BB2F6	V210307	double pole, 10 mm <sup>2</sup> , partition 17,5 mm (distance of poles), peg design, L-shaped	Max. rms current 63A, for installation of 6 modules	0.075	10
CMS810BB1F13	T210306	single pole, 10 mm <sup>2</sup> , partition 17,5 mm (distance of poles), peg design, L-shaped	Max. rms current 63A, for installation of 13 modules	0.036	10

1) weight in kg per piece or set including package

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [mersen](#) manufacturer:*

Other Similar products are found below :

[HE-54](#) [RT3625B02500](#) [RT3835C00000](#) [RT7180U00000](#) [J212091](#) [A50QS200-4](#) [A331016F](#) [A70QS400-4](#) [RT3840C00000](#) [A50QS300-4](#)  
[A70QS200-4](#) [66344-72.0](#) [A50QS50-4](#) [ATDR10](#) [6,9URD30TTF0500](#) [A50QS150-4](#) [A50QS250-4](#) [A50QS350-4](#) [A70QS250-4](#) [DCT20-SB](#)  
[DCT10-SB](#) [C215650](#) [RT3610B02500](#) [RT3850C00000](#) [RT3860C00000](#) [RT7080U00000](#) [RT7102U00000](#) [RT7110U00000](#) [RT3855C00000](#)  
[RT7104U00000](#) [S218194](#) [ATDR1](#) [T331079](#) [RT3810B02500](#) [F222208](#) [RT7010U00000](#) [RT5235B00000](#) [RT5240B00000](#) [F214618](#) [A214107](#)  
[RT3325B02500](#) [RT5553B00000](#) [RT5660B00000](#) [RT3845C00000](#) [RT3115B02500](#) [RT5035B00000](#) [RT1250B00000](#) [RT3120B02500](#)  
[RT3410B02500](#) [RT3720B02500](#)